

Meta-MEC

Mini Contactors and Overload Relays



**Customer satisfaction with world-class
products and services :
LS is committed to excellence!**

We are committed to global product development,
driving future growth, and expanding
the overseas market share, as well as consolidating
existing business. Join us in a future where LS
will become a genuine global leader.



Contents



Features	04	Motor starters, open	17
Catalog numbering system	10	Mini contactors, Reversing type	18
Quick selection table	12	Bimetallic style	22
AC coil	13	Accessories	24
DC coil	15	Dimensions	29

h factors and Overload Relays



Compact & Space Saving

LS Mini contactors & starters



LS Mini contactors and starters are suitable for the switching and protection of small motors up to 7.5kW, lights and electric heating circuits.

KEMA type tested as the global product that meets international standards such as UL, CCC, Safe Certification and CE.



LS Mini -contactors and starters

Suitable for the switching and protection of motors, capacitor banks, lights, etc. in AC circuit.

Providing the convenience of connection and mounting by terminal options such as Cage clamp, Fast-on, Solder pin as well as Screw Terminal. In addition dedicated thermal style overload relays can be easily attached for motor protection and various accessories are also available - surge unit, timer unit, auxiliary contact unit.

Can be driven from the output of PLC :
low power consumption type contactor is available for this purpose, which requires no relay between contactor and PLC.



Contactors

Environmental conditions

- Ambient temperature: $-5 \sim 40^{\circ}\text{C}$ (standard 20°C)
- Max. temp. inside a panel: 55°C
- Relative humidity: $45 \sim 85\% \text{ RH}$
Altitude: max. 2,000m
- Vibration: $10 \sim 55\text{Hz}$, 2g
- Shock resistance: 5g
- Storage temperature: $-30 \sim 65^{\circ}\text{C}$

Reference standards

- IEC 60947-4
- UL 508

Certification

- ISO 9001, ISO 14001
- UL, CE, safety certification, CCC



Low Consumption


The low power consumption type contactor, a product that combines the advantages of the relay and the magnetic contactor, can be driven directly by the small output of the PLC. The relay and its space in the panel are not necessary any more.


Direct driving by

- PLC output contact
- Photoelectric switch, proximity switch . . .
- Transistor output of various detection




Direct driving by PLC output

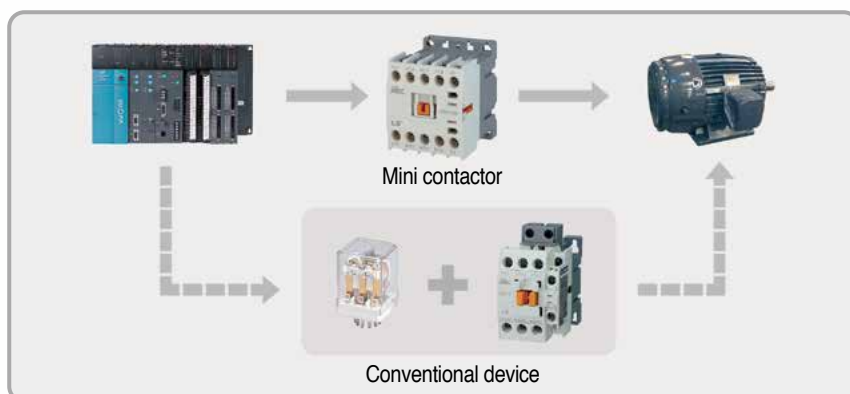

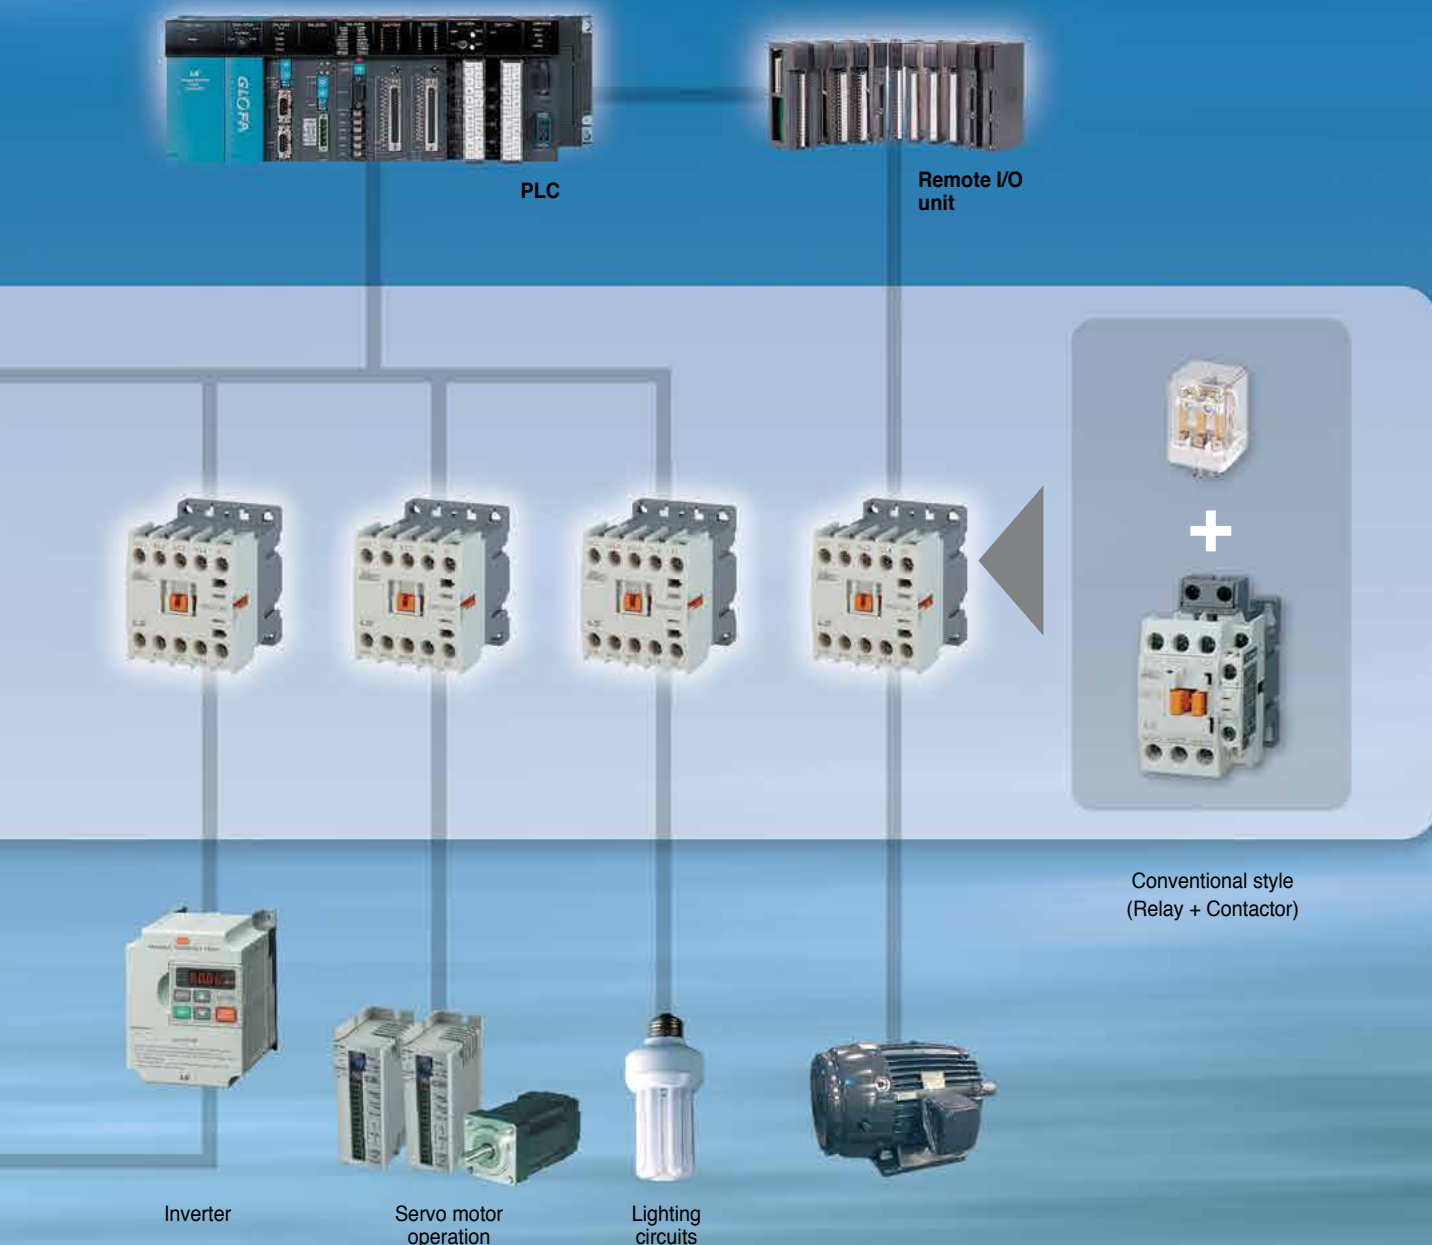

Reduction rate of power consumption


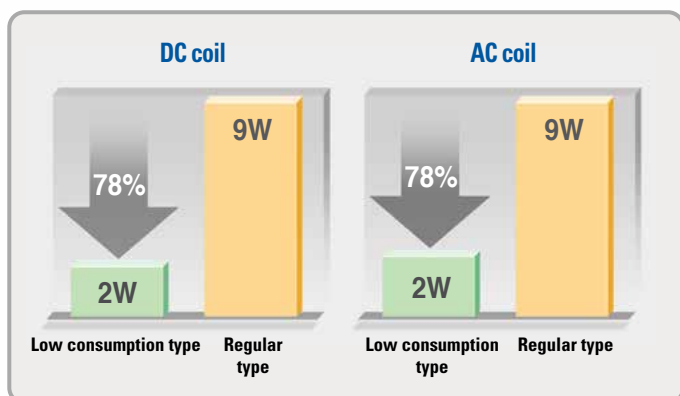


Characteristic of control coil

Coil Type	AC coil (50/60Hz)	DC	
		Regular	Wide
Power consumption (W)	2	3	2
Control voltage (V)	24~550	12~550	12, 20, 24, 48, 72, 110, 120
Operation voltage (%)	Pick-up	80 or under	75 or under
	Release	30 or over	12 or over
Operation time (ms)	Coil ON → Contact ON	20 or under	50 or under
	Coil OFF → Contact OFF	45 or under	45 or under

Convenience

4 terminal options for a variety of applications

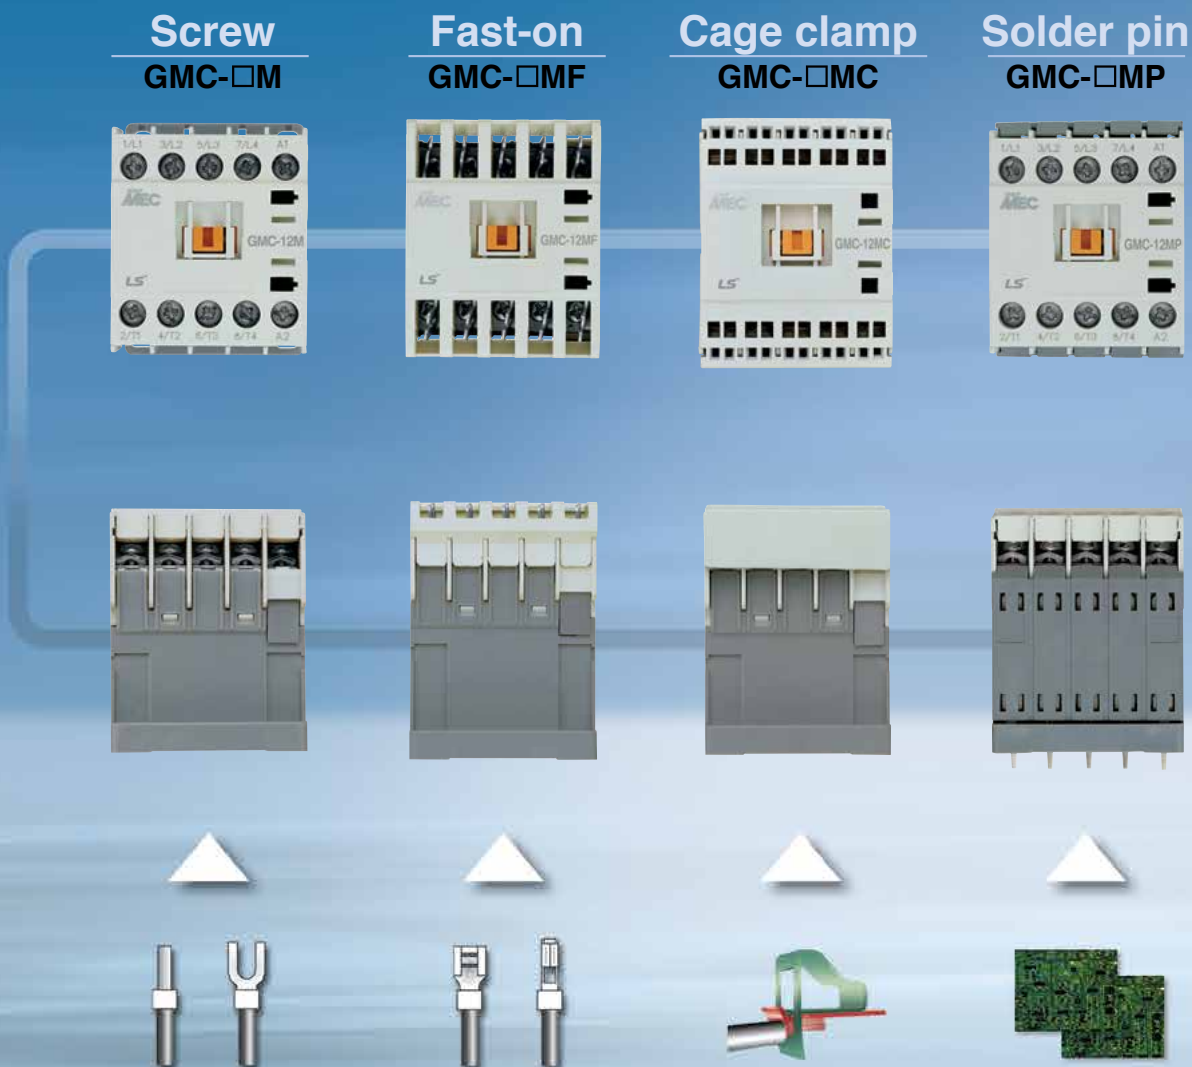

Screw terminal

Standard type with M3 screw for connection with a ring or U type terminal



Fast-on terminal

Plug-in style for connection with a quick-connector. (2.8×0.8t/6.3×0.8t common)



Cage clamp terminal

suitable for connection with wires directly





Solder pin terminal

for mounting on PCB

Auxiliary contact units


Item	Screw	Fast-on	Cage clamp	Solder pin
Side mount				
2-p, Front mount				×
4-p, Front mount				×

Accessories ...

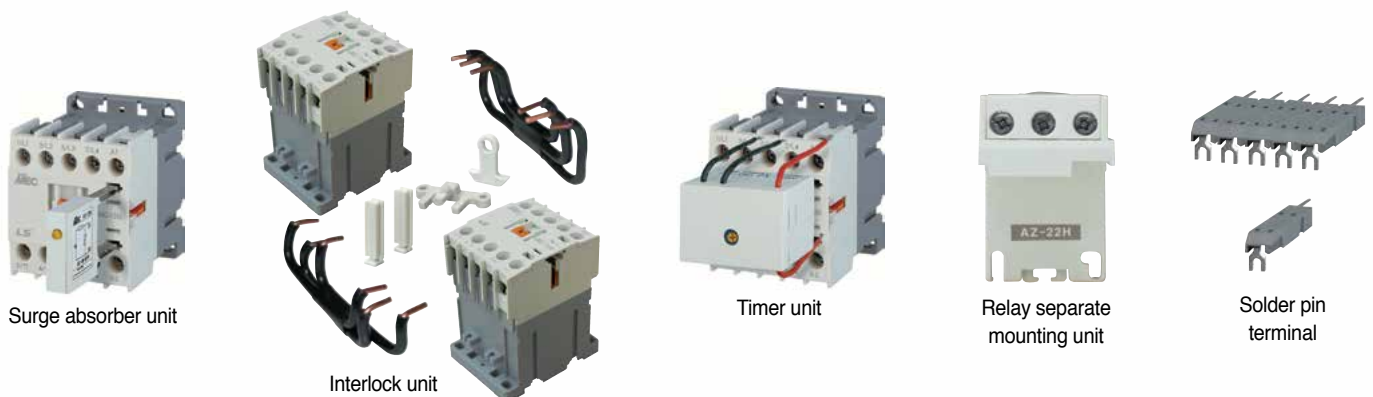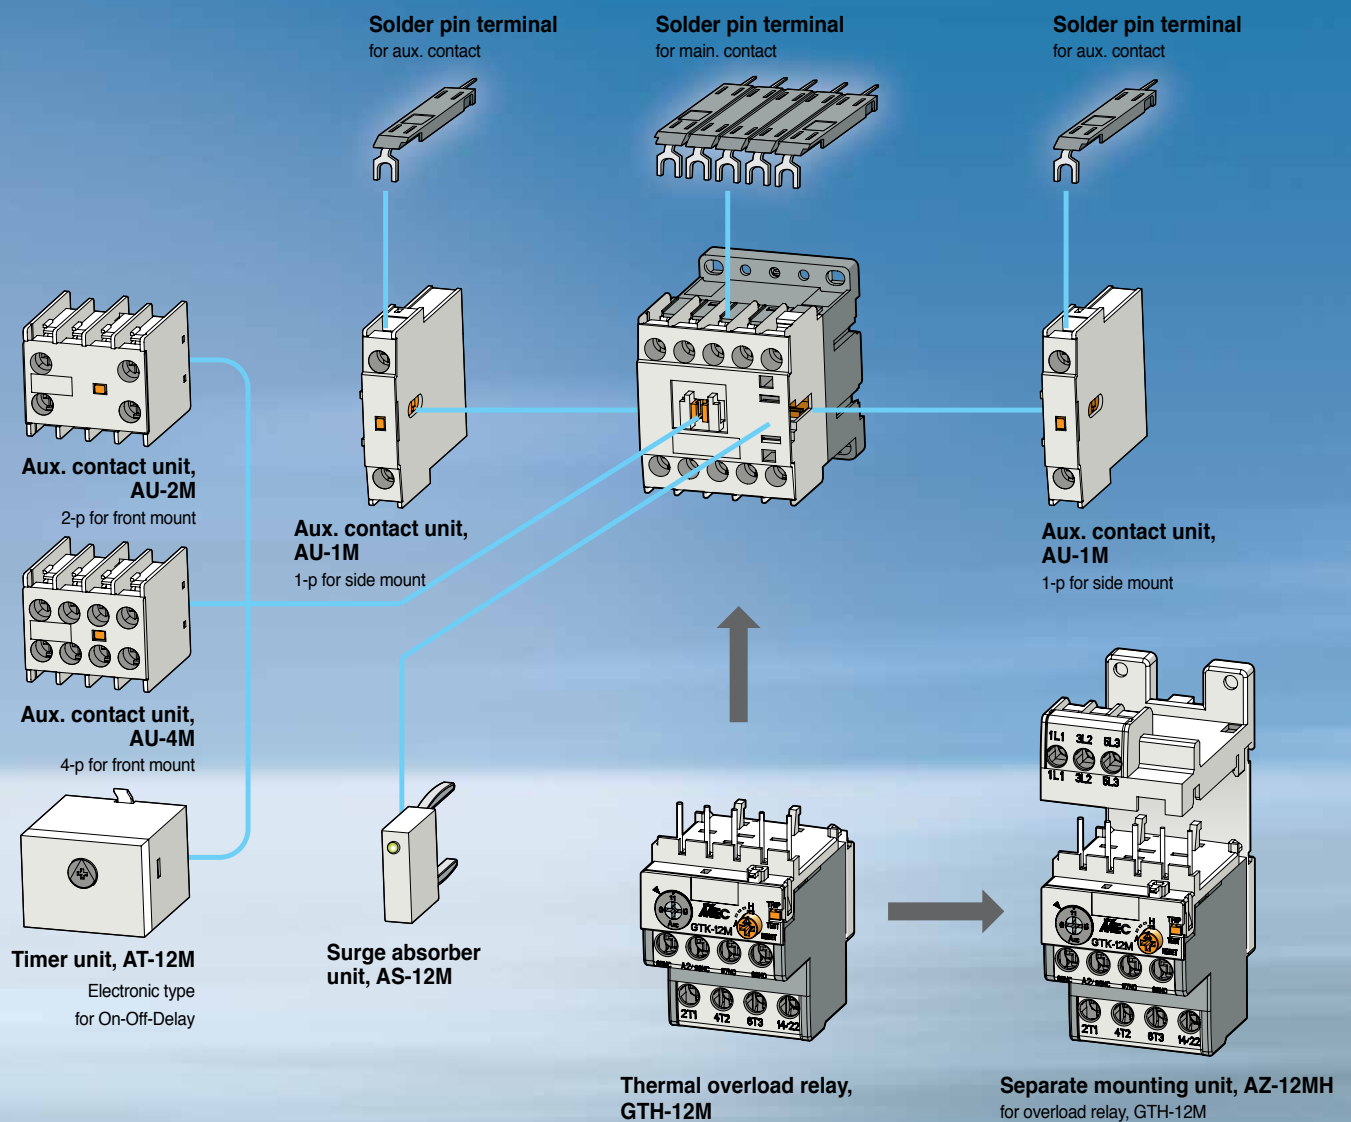


Catalog numbering system


Contactors & Starters

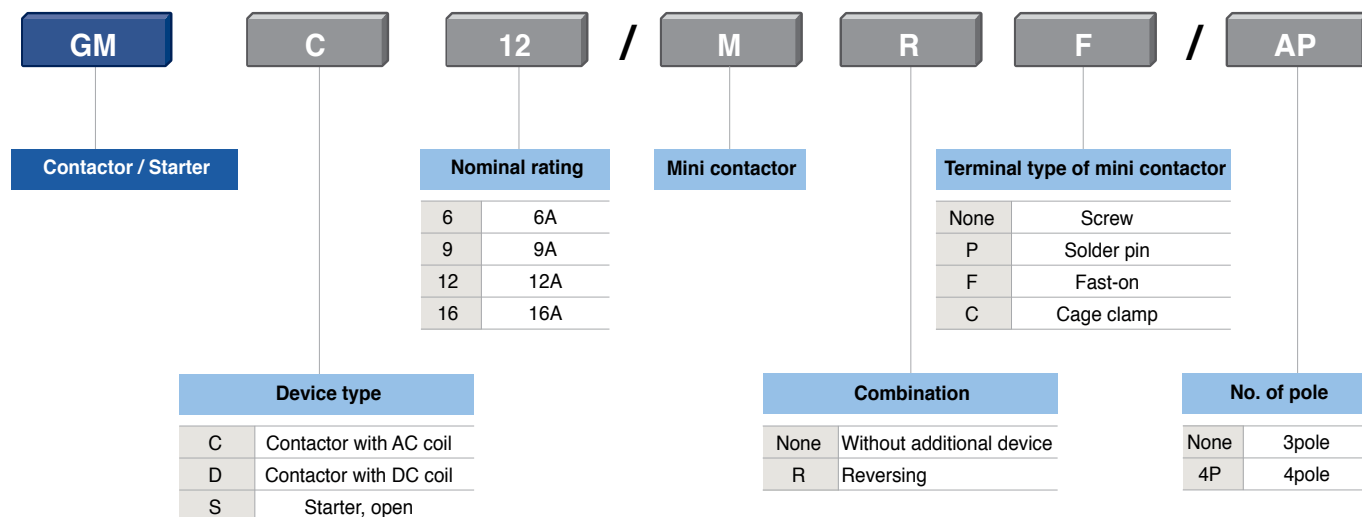

Thermal overload relay

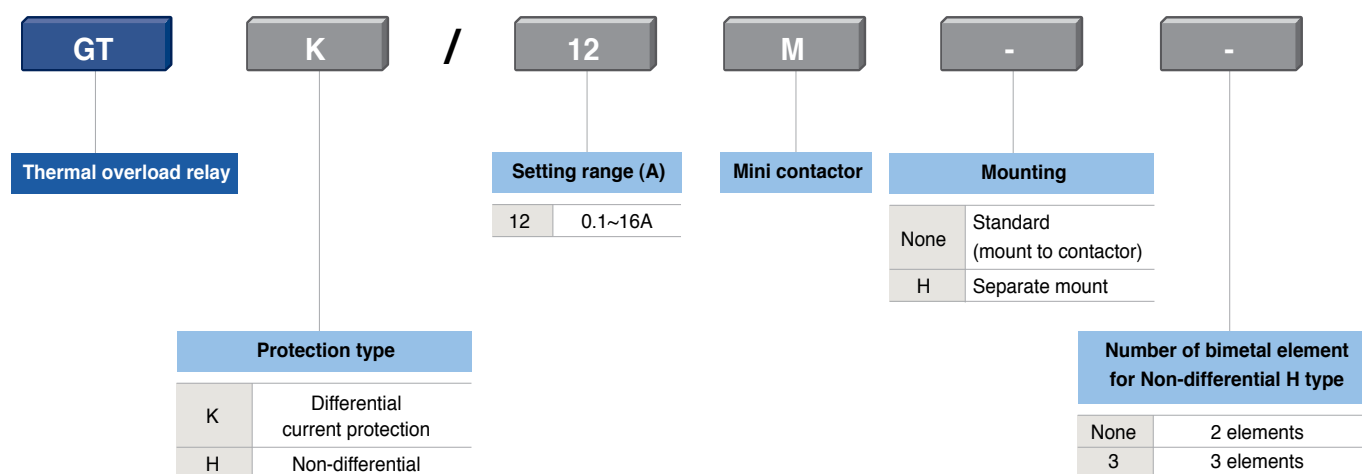

2-pole contactors

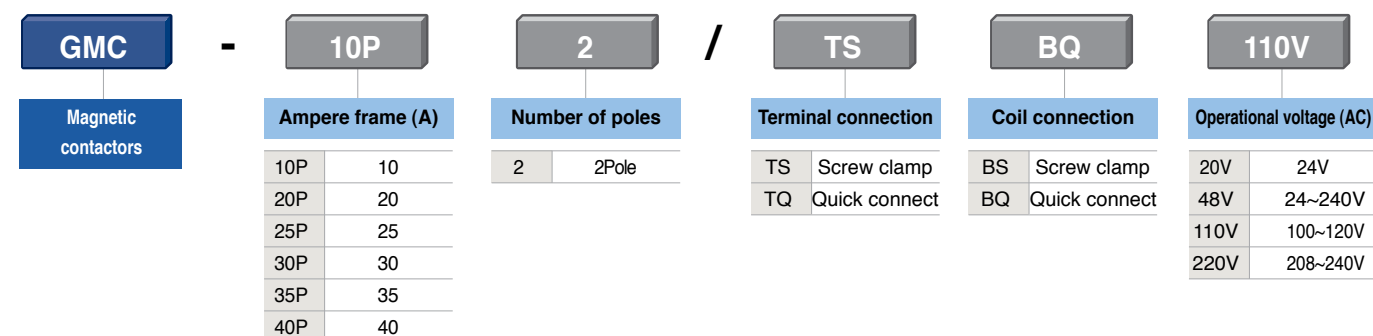

Auxiliary contact

AU	-	1	M	F	40
Auxiliary contact		No. of pole	Mini contactor	Terminal type of mini contactor	Contact configuration
		1 1pole		None Screw	10 1a 40 4a
		2 2pole		F Fast-on	01 1b 31 3a1b
		3 3pole		C Cage clamp	20 2a 22 2a2b
					11 1a1b 13 1a3b
					02 2b 04 4b

Note) 1. Solder pin unit (AP-1M (D) must be purchased separately for the auxiliary contact for solder pin mini contactor.

Timer unit

AT	-	12	M	/	1	-	N
Timer unit		Nominal rating	Mini contactor		Operating voltage		Delay method
					1 AC/DC 24~48	N	ON Delay
					2 AC 100~200V	F	OFF Delay

Serge unit

AS	-	12	M	/	1
Serge unit		Nominal rating	Mini contactor		Operating voltage
					1 AC 24~48 4 DC 12~24
					2 AC 60~127 5 DC 30~72
					3 AC 200~240 6 DC 100~127
					7 DC 200~250

Solder pin unit

AP	-	12	M	/	D
Solder pin unit		Unit distribution	Mini contactor		Operating voltage
		1 Auxiliary			None AC Operated type
		12 Contactor			D DC Operated type

Single mounting unit

AZ	-	12	MH
Thermal overload relay single mounting unit		Nominal rating	Mini contactor

Interlock unit

AR	-	12	M	/	W
Interlock unit		Nominal rating	Mini contactor		Wiring presence or absence
					None Absence
					W Presence

Quick selection table

Mini contactors

3NO main contacts
1 auxiliary contacts



Screw clamp type



Fast-on type



Cage clamp type



Solder pin type

Frame size		6A		9A		12A		16A	
Screw clamp type	AC coil	GMC-6M		GMC-9M		GMC-12M		GMC-16M	
	DC coil	GMD-6M		GMD-9M		GMD-12M		GMD-16M	
Fast-on type	AC coil	GMC-6MF		GMC-9MF		GMC-12MF		GMC-16MF	
	DC coil	GMD-6MF		GMD-9MF		GMD-12MF		GMD-16MF	
Cage clamp type	AC coil	GMC-6MC		GMC-9MC		GMC-12MC		GMC-16MC	
	DC coil	GMD-6MC		GMD-9MC		GMD-12MC		GMD-16MC	
Solder pin type	AC coil	GMC-6MP		GMC-9MP		GMC-12MP		GMC-16MP	
	DC coil	GMD-6MP		GMD-9MP		GMD-12MP		GMD-16MP	
Ratings / IEC60947-4		kW	A	kW	A	kW	A	kW	A
AC1		20		20		20		20	
AC3	200/240V	1.5	7	2.2	9	3	12	4	16
	380/440V	2.2	6	4	9	5.5	12	7.5	16
	500/550V	3	5	3.7	6	4	7	5.5	9
	690V	3	4	4	5	4	5	4	5
Ratings / UL508		hp	A	hp	A	hp	A	hp	A
continuous current		lth = 20A (maximum for cage clamp type is 10A)							
single phase	120V	1/2		1/2		1 *		-	
	230V/240V	1		1.5		2 **		-	
three phase	240V	1.5		3		3		-	
	480V	3		5		7.5 ***		-	
	600V	3		5		7.5		-	
Wire Range : Copper, 75°C, Stranded, 18-12AWG									
NEMA size		00		00		00		0	
Additional auxiliary contacts		Screw clamp type		Fast-on type		Cage clamp type		Solder pin type	
2-pole, Front mount		AU-2M		AU-2MF		AU-2MC			
4-pole, Front mount		AU-4M		AU-4MF		AU-4MC			
2-pole, Side mount		AU-1M		AU-1MF		AU-1MC			

Note) * = 1/2 for cage clamp type, ** = 1.5hp for cage clamp type, *** = 5hp for cage clamp type
16AF : not approved from UL

Overload Relays


Bimetallic style Type GT Class 10A	 GT-12M		Setting ranges (A) 0.1 - 0.16 0.16 - 0.25 0.25 - 0.4 0.4 - 0.63 0.63 - 1 1 - 1.6 1.6 - 2.5 2.5 - 4	4 - 6 5 - 8 6 - 9 7 - 10 9 - 13 12 - 16	 Base for separate mount	
	Differential		GTK-12M			
	Non-differential (3-heater)		GTH-12M/3			
	Non-differential (2-heater)		GTH-12M			

AC coil

Contactors

- For motor control
- 3 main plus 1 auxiliary contacts
- Coil voltage : AC

Circuit diagram



Screw clamp connection types

Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMC-6M
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMC-9M
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMC-12M
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMC-16M



Fast-on connection types

Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMC-6MF
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMC-9MF
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMC-12MF
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMC-16MF

Coil voltage, AC 50/60Hz

24, 36, 42, 48, 110, 115, 120, 127, 200 / 208, 220, 220 / 230, 230 / 240, 256, 277, 380 / 400
400, 440, 480, 500, 550V AC

Performance (at 440VAC)

Frame size	6A	9A	12A	16A
Operation current	6A	9A	12A	16A
Making current	72A	108A	144A	180A
Breaking current	60A	90A	120A	150A
Operation cycle	1800 operations/hour			
Endurance	• Electrical : 1 mil. operations • Mechanical : 12 mil. operations			

(Note) 16A frame is not UL listed item.

Coil characteristic

Coil voltage	AC
Coil consumption (W)	2
Inrush	32VA
Sealed	6VA
Closing voltage (%)	80~110
Opening voltage (%)	30~40
Closing time (ms)	10~20
Opening time (ms)	35~45


Certificate
CE, ULcUL

AC coil

Contactors

- For motor control
- 3 main plus 1 auxiliary contacts
- Coil voltage : AC

Circuit diagram



Cage clamp connection types



Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMC-6MC
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMC-9MC
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMC-12MC
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMC-16MC

Solder pin connection types




Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMC-6MP
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMC-9MP
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMC-12MP
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMC-16MP

Coil voltage, AC 50/60Hz

24, 36, 42, 48, 110, 115, 120, 127, 200 / 208, 220, 220 / 230, 230 / 240, 256, 277, 380 / 400, 440, 480, 500, 550V AC

Ordering information

Type, Auxiliary contact and Coil voltage

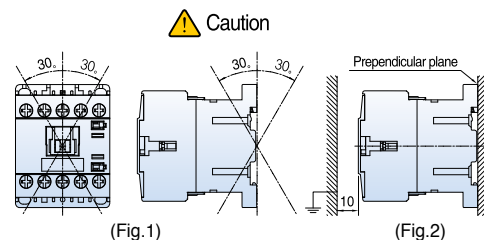

*Even installing direction takes the direction of Fig.1 to perpendicular, ip to the direction of the 30° .
Keep the distance more than 10mm with arc space shown Fig.2


Certificate
CE, ULcUL

DC coil

Contactors

- For motor control
- 3 main plus 1 auxiliary contacts
- Coil voltage : DC

Circuit diagram



Screw clamp connection types

Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMD-6M
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMD-9M
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMD-12M
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMD-16M



Fast-on connection types

Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMD-6MF
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMD-9MF
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMD-12MF
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMD-16MF

Coil voltage, DC

- ① Standard type : 12, 20, 24, 36, 42, 48, 60, 72, 110, 120, 125, 220, 240, 250V DC
- ② Low consumption type : 12, 20, 24, 48, 72, 110, 120V DC(Low)
- ③ Wide Voltage : 12, 20, 24, 48, 72, 110, 12V DC(Wide)

Ordering information

Type, Auxiliary contact and Coil voltage

Coil characteristic

Coil voltage	DC		
	Standard	Low consumption	Wide voltage
Coil consumption (W)	3	1.2	2
Inrush	3W	1.2W	2W
Sealed	3W	1.2W	2W
Closing voltage (%)	80~110	80~125	70~125
Opening voltage (%)	10~30	10~30	10~30
Closing time (ms)	40~50	40~50	40~50
Opening time (ms)	35~45	35~45	35~45


Certificate
CE, ULcUL

DC coil

Contactors

- For motor control
- 3 main plus 1 auxiliary contacts
- Coil voltage : DC

Circuit diagram



Cage clamp connection types



Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMD-6MC
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMD-9MC
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMD-12MC
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMD-16MC

Solder pin connection types




Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMD-6MP
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMD-9MP
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMD-12MP
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMD-16MP

Coil voltage, DC

- ① Standard type : 12, 20, 24, 36, 42, 48, 60, 72, 110, 120, 125, 220, 240, 250V DC
- ② Low consumption type : 12, 20, 24, 48, 72, 110, 120V DC(Low)
- ③ Wide Voltage : 12, 20, 24, 48, 72, 110, 12V DC(Wide)

Ordering information

Type, Auxiliary contact and Coil voltage

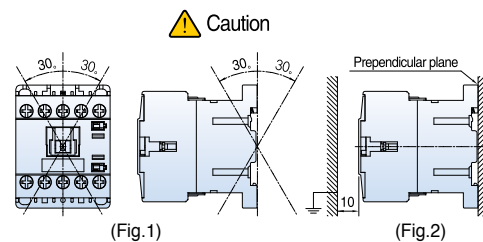

*Even installing direction takes the direction of Fig.1 to perpendicular, ip to the direction of the 30°.
Keep the distance more than 10mm with arc space shown Fig.2

Certificate
CE, ULcUL

Starters

- Open types
- Direct (Full voltage) types
- Coil voltage : AC
- Contactors : screw clamp connection types
- Overload relays : differential or non-differential types



AC coil contactor + Differential type overload relay

Devices combined		AC3 ratings (IEC60947-4)				Auxiliary contacts	Starter Type
Contactor (AC coil)	Overload (differential)	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V		
GMC-6M	GTK-12M	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	1NO or 1NC	GMS-6M/K
GMC-9M	GTK-12M	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	1NO or 1NC	GMS-9M/K
GMC-12M	GTK-12M	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	1NO or 1NC	GMS-12M/K
GMC-16M	GTK-12M	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	1NO or 1NC	GMS-16M/K

AC coil contactor + Non-differential type overload relay

Devices combined		AC3 ratings (IEC60947-4)				Auxiliary contacts	Starter Type
Contactor (AC coil)	Overload (differential)	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V		
GMC-6M	GTH-12M/3	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	1NO or 1NC	GMS-6M
GMC-9M	GTH-12M/3	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	1NO or 1NC	GMS-9M
GMC-12M	GTH-12M/3	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	1NO or 1NC	GMS-12M
GMC-16M	GTH-12M/3	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	1NO or 1NC	GMS-16M

Coil voltage, AC 50/60Hz

24, 36, 42, 48, 110, 115, 120, 127, 200 / 208, 220, 220 / 230, 230 / 240, 256, 277, 380 / 400
400, 440, 480, 500, 550V AC

Ordering information

Type, Auxiliary contact and Coil voltage
Overload relay setting range

Certificate
CE, ULcUL

Reversing contactors


- For motor control
- Mechanically interlocked
- Coil voltage : AC

Screw clamp connection types



Frame size	AC3 ratings (IEC60947-4)				AC1 rating Ith	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMC-6MR
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMC-9MR
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMC-12MR
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMC-16MR

Fast-on connection types



Frame size	AC3 ratings (IEC60947-4)				AC1 rating Ith	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMC-6MFR
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMC-9MFR
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMC-12MFR
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMC-16MFR

Coil voltage, AC 50/60Hz

24, 36, 42, 48, 110, 115, 120, 127, 200 / 208, 220, 220 / 230, 230 / 240, 256, 277, 380 / 400
400, 440, 480, 500, 550V AC

Certificate
CE, ULcUL

Ordering information

Type, Auxiliary contact and Coil voltage

Reversing contactors

- For motor control
- Mechanically interlocked
- Coil voltage : AC



Cage clamp connection types

Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMC-6MCR
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMC-9MCR
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMC-12MCR
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMC-16MCR

Solder pin connection types



Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMC-6MPR
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMC-9MPR
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMC-12MPR
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMC-16MPR

Coil voltage, AC 50/60Hz

24, 36, 42, 48, 110, 115, 120, 127, 200 / 208, 220, 220 / 230, 230 / 240, 256, 277, 380 / 400, 400, 440, 480, 500, 550V AC

Certificate
CE, ULcUL

Ordering information

Type, Auxiliary contact and Coil voltage

Reversing contactors

- For motor control
- Mechanically interlocked
- Coil voltage : DC

Screw clamp connection types



Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMD-6MR
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMD-9MR
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMD-12MR
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMD-16MR

Fast-on connection types



Frame size	AC3 ratings (IEC60947-4)				AC1 rating lth	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMD-6MFR
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMD-9MFR
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMD-12MFR
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMD-16MFR

Coil voltage, DC

- ① Standard type : 12, 20, 24, 36, 42, 48, 60, 72, 110, 120, 125, 220, 240, 250V DC
- ② Low consumption type : 12, 20, 24, 48, 72, 110, 120V DC(Low)
- ③ Wide Voltage : 12, 20, 24, 48, 72, 110, 12V DC(Wide)

Ordering information

Type, Auxiliary contact and Coil voltage

Certificate
CE, ULcUL

Reversing contactors

- For motor control
- Mechanically interlocked
- Coil voltage : DC



Cage clamp connection types

Frame size	AC3 ratings (IEC60947-4)				AC1 rating Ith	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMD-6MCR
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMD-9MCR
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMD-12MCR
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMD-16MCR



Solder pin connection types

Frame size	AC3 ratings (IEC60947-4)				AC1 rating Ith	Auxiliary contact (standard)	Type
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
6A	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	20A	1NO or 1NC	GMD-6MSR
9A	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	20A	1NO or 1NC	GMD-9MSR
12A	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	20A	1NO or 1NC	GMD-12MSR
16A	4kW 16A	7.5kW 16A	5.5kW 9A	4kW 5A	20A	1NO or 1NC	GMD-16MSR

Coil voltage, DC

- ① Standard type : 12, 20, 24, 36, 42, 48, 60, 72, 110, 120, 125, 220, 240, 250V DC
- ② Low consumption type : 12, 20, 24, 48, 72, 110, 120V DC(Low)
- ③ Wide Voltage : 12, 20, 24, 48, 72, 110, 12V DC(Wide)

Ordering information

Type, Auxiliary contact and Coil voltage

Certificate
CE, ULcUL


Bimetallic style

Description



GT-12M

- Direct mount on the mini contactors with screw clamp connection.
contactor types : GMC(D)-6M, GMC(D)-9M,
GMC(D)-12M, GMC(D)-16M,
- DIN rail or screw mountable with the optional base AZ-22H
- Small physical size : 44 mm wide
- 1NO+1NC trip contacts
- Trip class 10A according to IEC60947-4-1
- Differential current/Phase failure protection : GTK types
- Non-differential GTH types are available for the economic solution
- Ambient compensated -5 to 40 °C
- Manual/Automatic reset convertible.
- Remote reset is optional
- Trip free designed



Separate
mount

Direct
mount



GT-12M

Catalog No.

Setting ranges(A)	Differential type		Non-differential type	
	3-heater		3-heater	2-heater
0.1 - 0.16	GTK-12M • 0.14		GTH-12M/3 • 0.14	GTH-12M • 0.14
0.16 - 0.25	GTK-12M • 0.21		GTH-12M/3 • 0.21	GTH-12M • 0.21
0.25 - 0.4	GTK-12M • 0.33		GTH-12M/3 • 0.33	GTH-12M • 0.33
0.4 - 0.63	GTK-12M • 0.52		GTH-12M/3 • 0.52	GTH-12M • 0.52
0.63 - 1	GTK-12M • 0.82		GTH-12M/3 • 0.82	GTH-12M • 0.82
1 - 1.6	GTK-12M • 1.3		GTH-12M/3 • 1.3	GTH-12M • 1.3
1.6 - 2.5	GTK-12M • 2.1		GTH-12M/3 • 2.1	GTH-12M • 2.1
2.5 - 4	GTK-12M • 3.3		GTH-12M/3 • 3.3	GTH-12M • 3.3
4 - 6	GTK-12M • 5		GTH-12M/3 • 5	GTH-12M • 5
5 - 8	GTK-12M • 6.5		GTH-12M/3 • 6.5	GTH-12M • 6.5
6 - 9	GTK-12M • 7.5		GTH-12M/3 • 7.5	GTH-12M • 7.5
7 - 10	GTK-12M • 8.5		GTH-12M/3 • 8.5	GTH-12M • 8.5
9 - 13	GTK-12M • 12		GTH-12M/3 • 12	GTH-12M • 12
12 - 16	GTK-12M • 14		GTH-12M/3 • 14	GTH-12M • 14


Auxiliary (Trip) contact rating

AC15(11) duty			DC13(11) duty	
110V	220V	550V	110V	220V
2.5(0.3)A	2(0.3)A	1(0.3)A	0.28A	0.14A

Note) Values of () are the ratings of NO contact under auto reset mode.

Certificate
CE, ULcUL

Auxiliary contacts

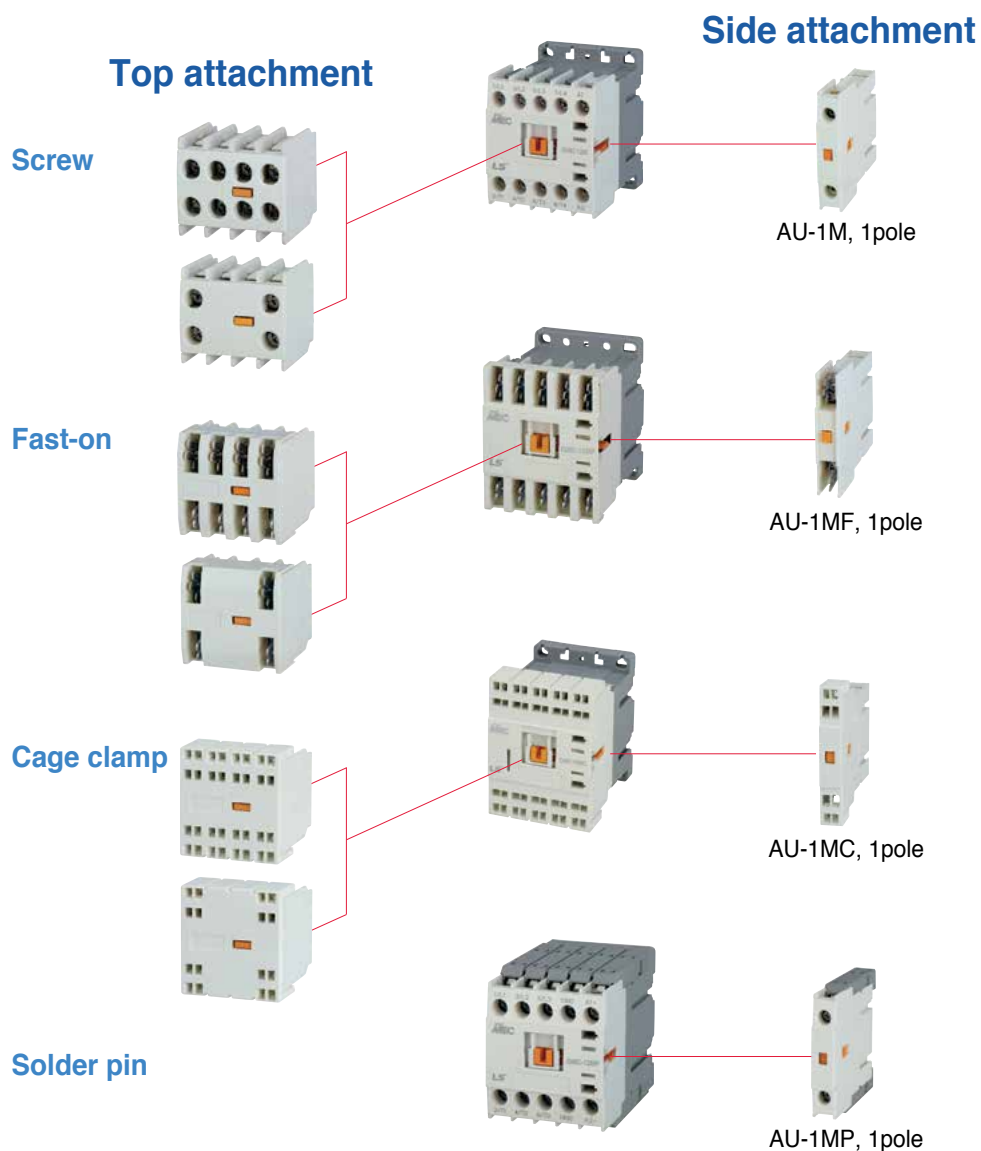

Note) 1. Auxiliary contacts for side attachment can be extended up to 2 contacts.
 2. DC 3W operation coil can be extended to 6 contacts,
 DC 2W operation coil can extend to 2 contacts,
 and DC 1.2W operation coil can not extend auxiliary contact.

Performance of Auxiliary Contact

Type	Rated Voltage(V)	Rated Current(V)	Closing and breaking capacity(A)		Lifetime(10,000 times)	
			Closing	Breaking	Mechanical	Electrical
AU-1M	440	3	38	38	100	1200
AU-2M	440	3	38	38	100	1200
AU-4M	440	3	38	38	100	1200

Auxiliary contact rating

Rated operating current											Rated current
AC15				DC13			AC12		DC12		
110V	220V	500V	600V	48V	110V	220V	110V	220V	110V	220V	
6	3	1.5	1.2	1.5	0.55	0.27	10	8	2.5	1	10

Timer unit, AT-12M

- Electronic type
- ON/OFF time delay
- Front mount

Timer unit



Surge absorber unit



Electronic Timer

Type	Control voltage	Delay	Time	Applied contactors
AT-12M / IN	AC/DC 24~48V	ON	0.1~30s	GMC-6M~16M GMD-6M~16M
AT-12M / IF	AC/DC 24~48V	OFF	0.1~30s	GMC-6M~16M GMD-6M~16M
AT-12M / 2N	AC 100~220V	ON	0.1~30s	GMC-6M~16M GMD-6M~16M
AT-12M / 2F	AC 100~220V	OFF	0.1~30s	GMC-6M~16M GMD-6M~16M

Surge absorber unit, AS-12M

- Coil surge suppressor


Surge absorber unit



Type	Internal element	Operational voltage	Applied contactors
AS-12M / 1	Varistor	AC24~48V	GMC-6M~16M
AS-12M / 2		AC60~127V	
AS-12M / 3		AC200~240V	
AS-12M / 4		DC12~24V	GMD-6M~16M
AS-12M / 5		DC30~72V	
AS-12M / 6		DC100~127V	
AS-12M / 7		DC200~250V	


Separate mounting unit, AZ-12MH

- To mount a relay separately from a contactor
- Mountable on DIN rail or by screw fixing

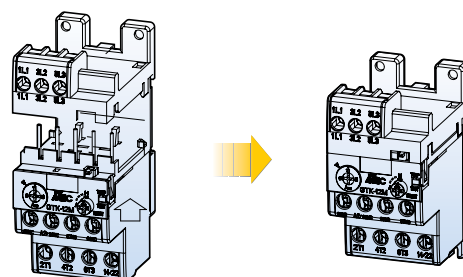


Electrical life of mini contactors

Use in category AC-3
($U_e \geq 440V$)

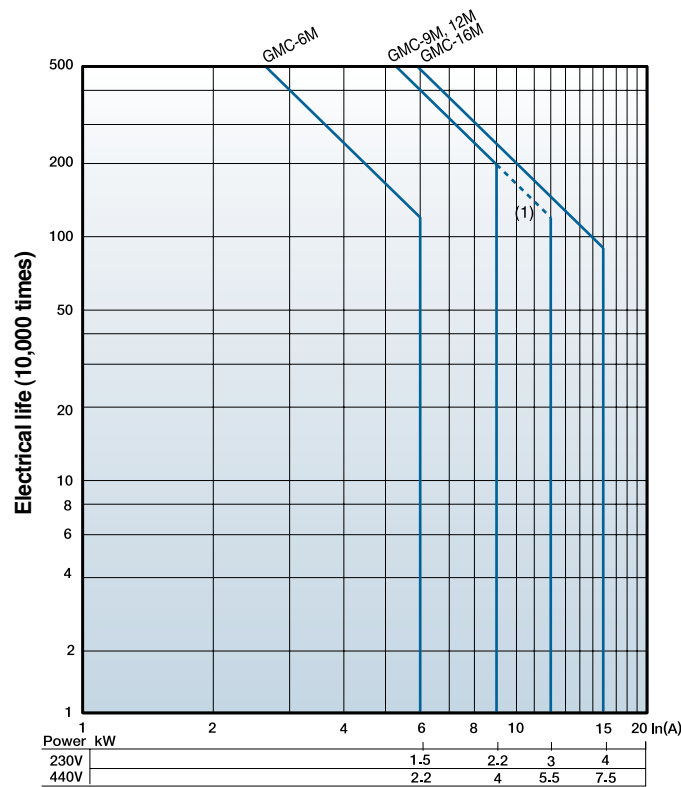

(1) The dotted lines are only applicable to GMC-12M contactors.

Use in category AC-4
($U_e \geq 440V$)


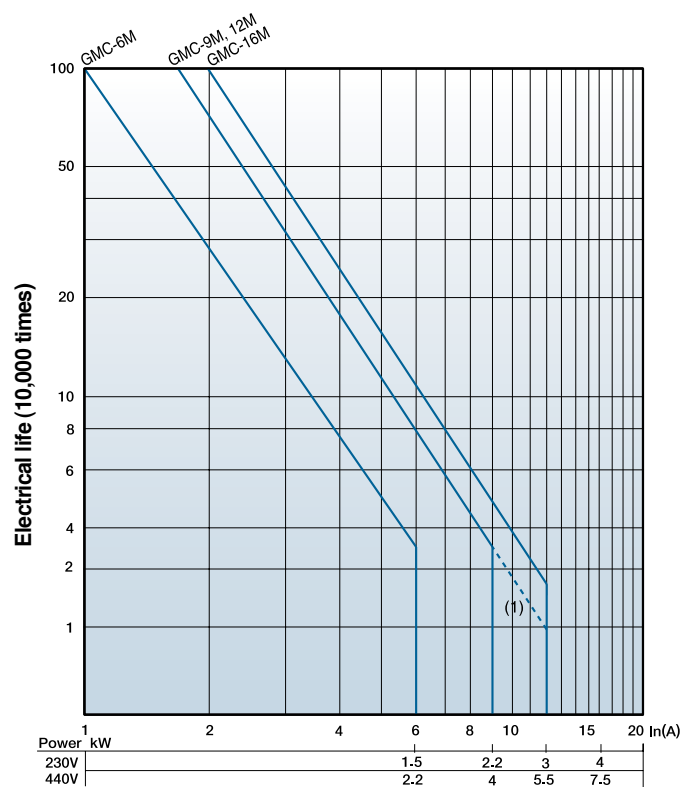


(1) The dotted lines are only applicable to GMC-12M contactors.



Characteristic curve of thermal overload relay

META-MEC

Non-differential type
GTH-12M

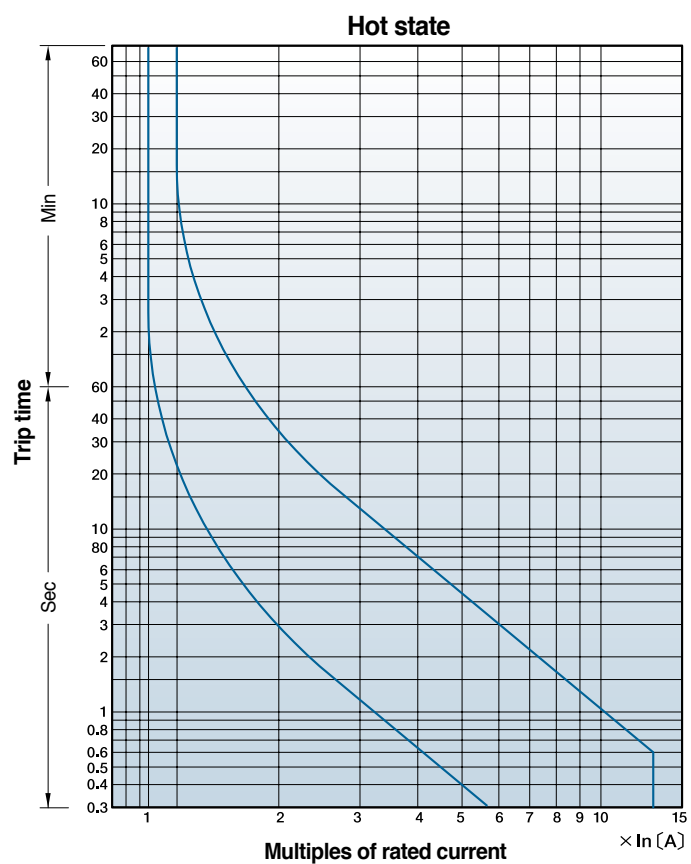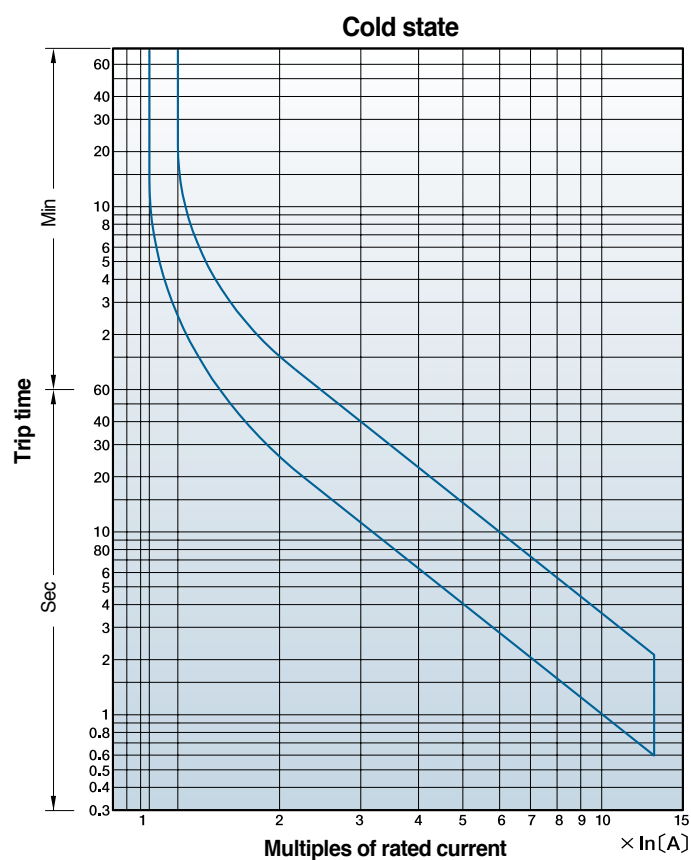

Differential type GTK-12M

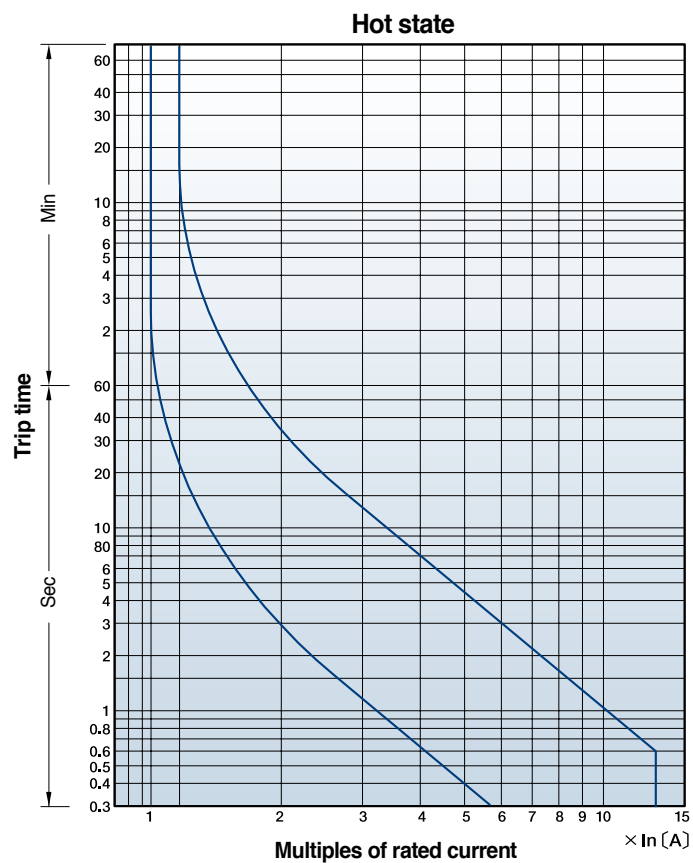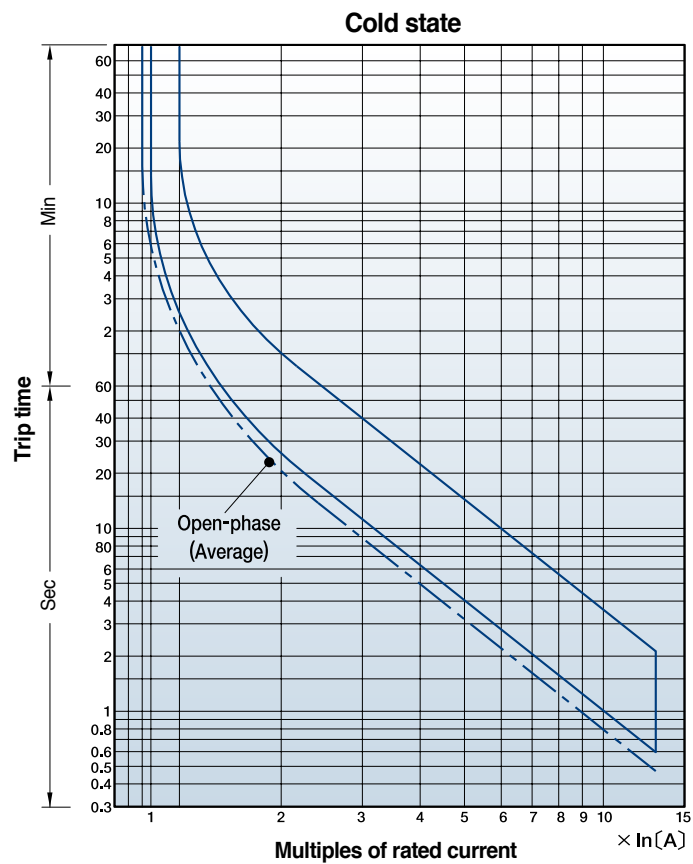




Interlock unit, AR-12M

consists of


- Mechanical interlock components
- Cable kits for line and load sides

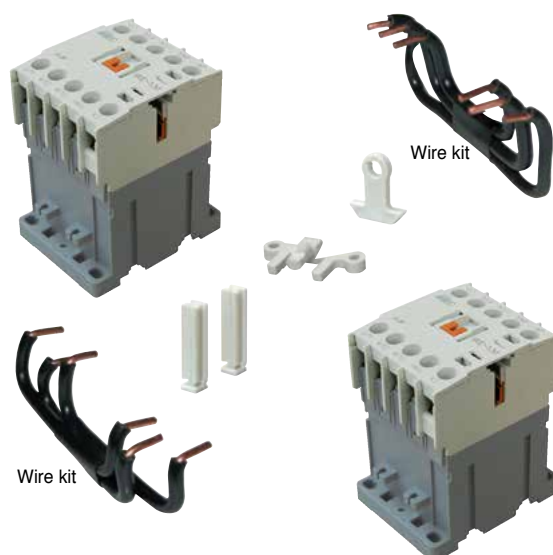

* Wire kit Included model name is AR-DMW,
not included model name is AR-DM.

Solder pin terminals


To modify the connection to Solder pin type from Screw clamp type
Available for contactors and auxiliary contact blocks

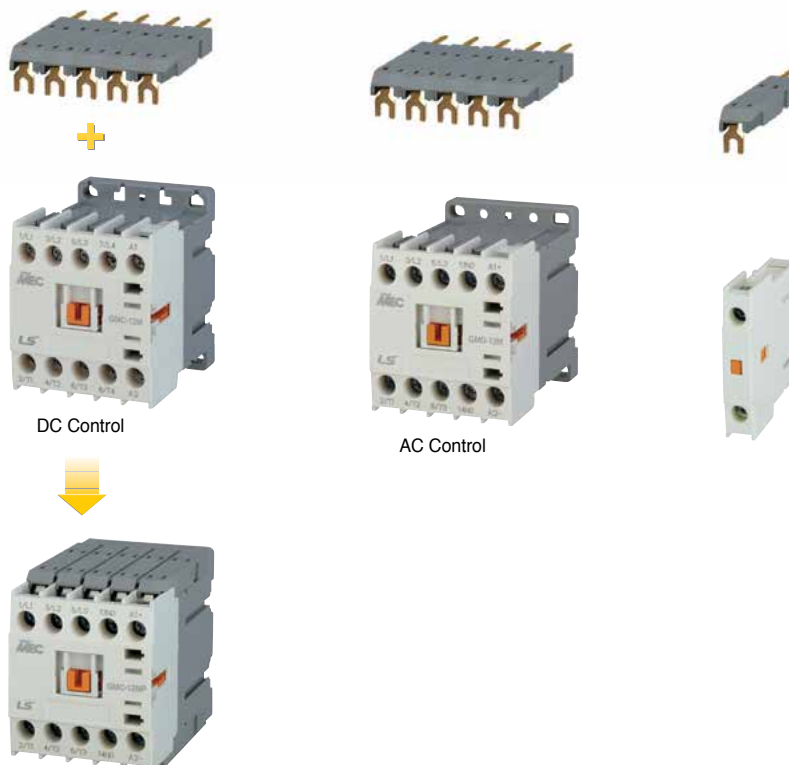


Dimensions

Mini contactors with Screw clamp type

- GMC-6M
- GMC-9M
- GMC-12M
- GMC-16M
- GMC-6M/4
- GMC-9M/4
- GMC-12M/4
- GMC-16M/4

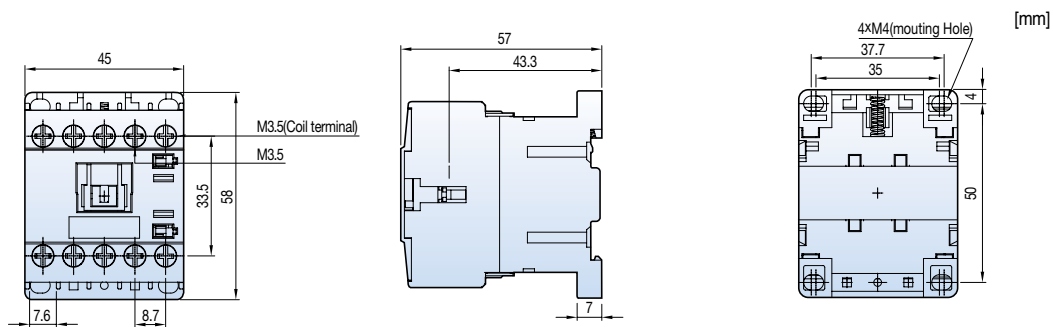



- GMD-6M
- GMD-9M
- GMD-12M
- GMD-16M
- GMD-6M/4
- GMD-9M/4
- GMD-12M/4
- GMD-16M/4

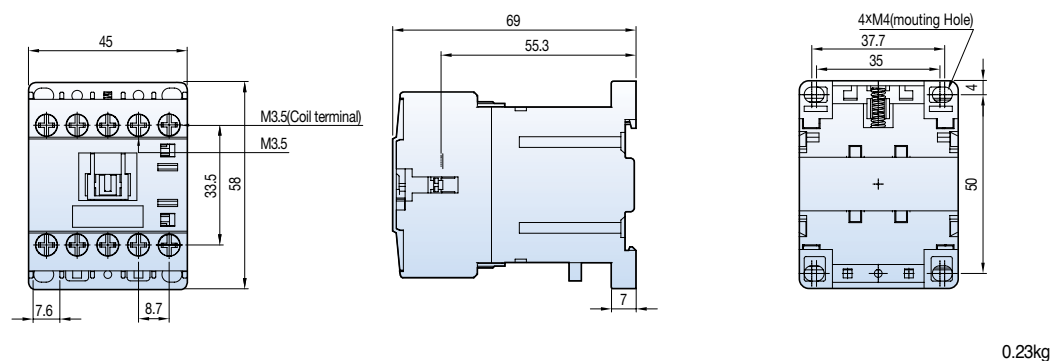

Circuit diagram



GMC-6M~16M, GMD-6M~16M

3-Pole contactors

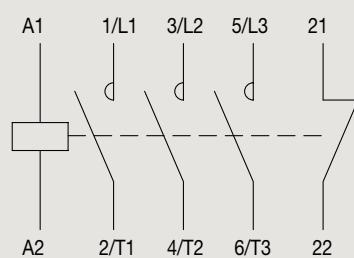

GMC-6M/4~16M/4, GMD-6M/4~16M/4

4-Pole contactors

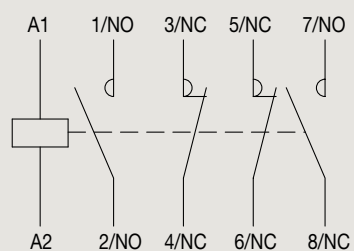

Dimensions

Mini contactors with Solder pin type

GMC-6MP

GMC-9MP

GMC-12MP




GMC-16MP

GMC-6MP/4

GMC-9MP/4

GMC-12MP/4

GMC-16MP/4

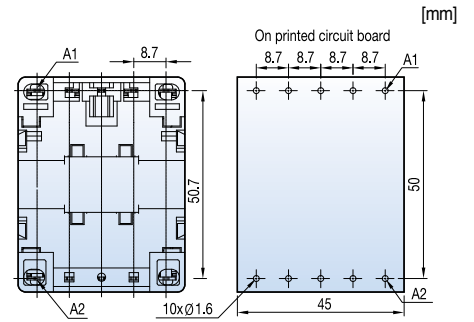

0.17kg

GMD-6MP

GMD-9MP

GMD-12MP




GMD-16MP

GMD-6MP/4

GMD-9MP/4

GMD-12MP/4

GMD-16MP/4

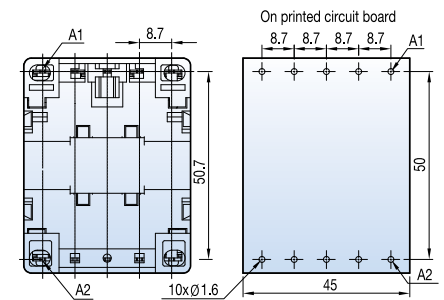



0.23kg

Circuit diagram



GMC-6MP~16MP, GMD-6MP~16MP

3-Pole contactors



GMC-6MP/4~16MP/4, GMD-6MP/4~16MP/4

4-Pole contactors



Mini contactors with Fast-on type

GMC-6MF

GMC-9MF

GMC-12MF




GMC-16MF

GMC-6MF/4

GMC-9MF/4

GMC-12MF/4

GMC-16MF/4



[mm]

0.18kg

GMD-6MF

GMD-9MF

GMD-12MF




GMD-16MF

GMD-6MF/4

GMD-9MF/4

GMD-12MF/4

GMD-16MF/4





0.27kg

Circuit diagram



GMC-6MF~16MF, GMD-6MF~16MF

3-Pole contactors



GMC-6MF/4~16MF/4, GMD-6MF/4~16MF/4

4-Pole contactors



Dimensions

Mini contactors with Cage clamp type

GMC-6MC

GMC-9MC

GMC-12MC




GMC-16MC

GMC-6MC/4

GMC-9MC/4

GMC-12MC/4

GMC-16MC/4



[mm]

0.19kg

GMD-6MC

GMD-9MC

GMD-12MC




GMD-16MC

GMD-6MC/4

GMD-9MC/4

GMD-12MC/4

GMD-16MC/4





0.28kg

Circuit diagram



GMC-6MC~16MC, GMD-6MC~16MC

3-Pole contactors






GMC-6MC/4~16MC/4, GMD-6MC/4~16MC/4

4-Pole contactors



Mini contactors with Auxiliary contacts




GMC-6M
GMC-9M
GMC-12M
GMC-16M
+
AU-4M

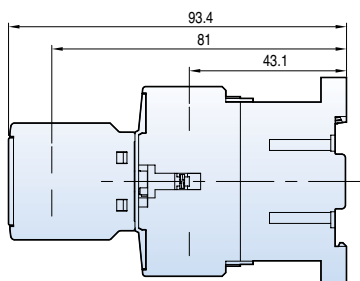

[mm]




0.21kg

GMC-6M
GMC-9M
GMC-12M
GMC-16M
+
2× AU-1M



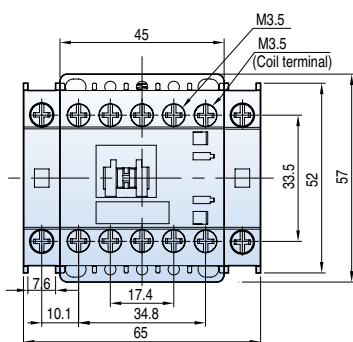


0.21kg

GMC-6MP
GMC-9MP
GMC-12MP
GMC-16MP
+
2× AU-1MP



GMC-6MF
GMC-9MF
GMC-12MF
GMC-16MF
+
AU-4MF






0.23kg

Dimensions




Mini contactors with Auxiliary contacts

- GMC-6MF
- GMC-9MF
- 2×GMC-12MF
- GMC-16MF
- + AU-1MF






0.32kg

- GMC-6MC
- GMC-9MC
- GMC-12MC
- GMC-16MC
- + AU-4MC

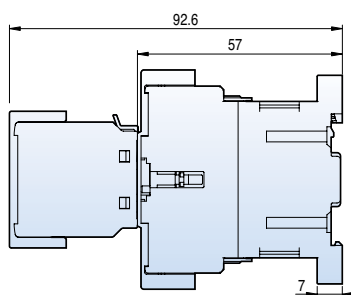

0.24kg




- GMC-6MC
- GMC-9MC
- 2×GMC-12MC
- GMC-16MC
- + AU-1MC



0.23kg

Mini contactors with external accessories




GMC-6M
GMC-9M
GMC-12M
GMC-16M
+
AT-12M

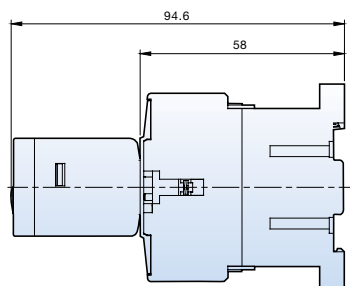

[mm]

0.21kg


GMD-6M
GMD-9M
GMD-12M
GMD-16M
+
AS-12M



0.175kg




META-MEC

GTH(K)-12M



0.1kg

GTH(K)-12MH



0.4kg




Mini motor starters, open

GMS-6M

GMS-9M

GMS-12M

GMS-16M

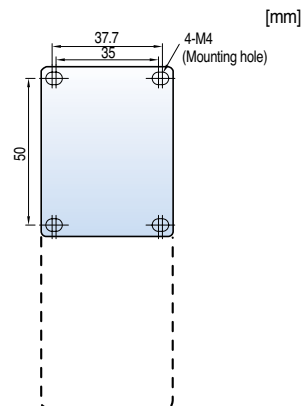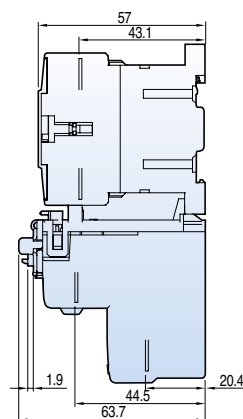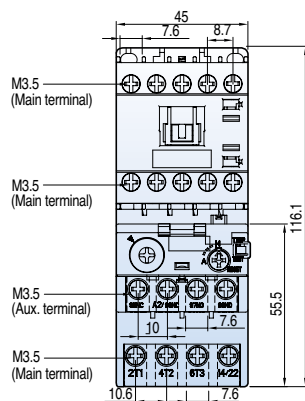




0.26kg

GMS-6MD

GMS-9MD

GMS-12MD

GMS-16MD

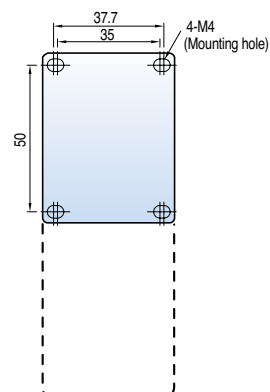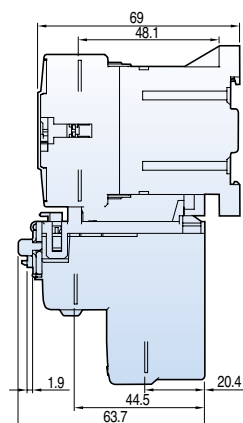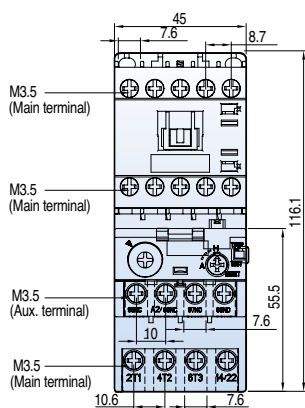




0.39kg

Dimensions

Mini contactor relays




[mm]

GMR-4M



0.17kg




GMR-4MD



0.23kg

GMR-4M




GMR-8M



0.21kg

GMR-4M

GMR-8M


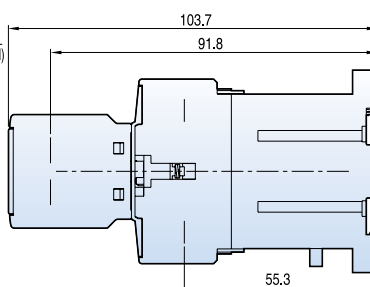



0.21kg

GMR-4M

+


2 × AU-1M




0.21kg

Mini contactor relays

GMR-4MP

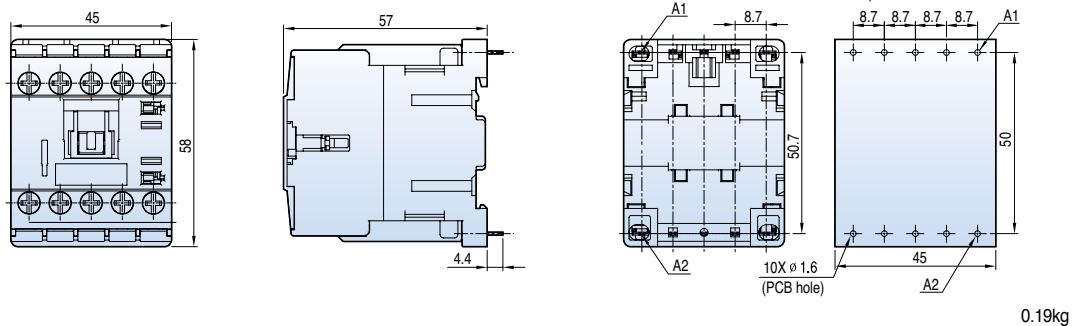


GMR-4MPD

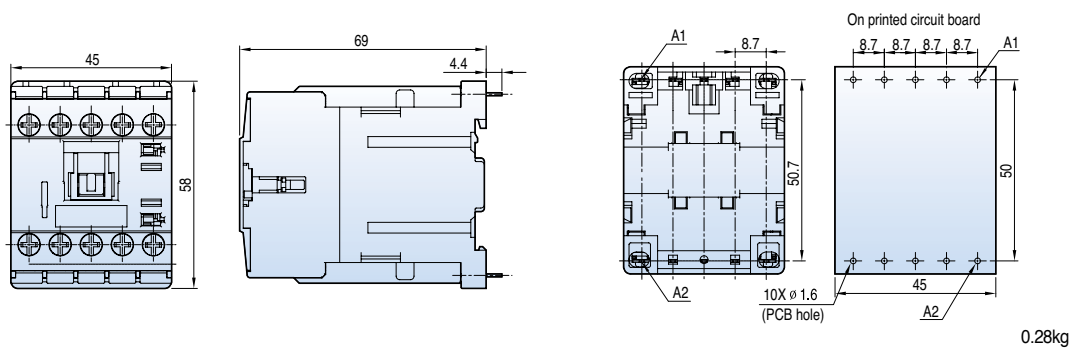

GMR-4MP




2×
+
AU-1M

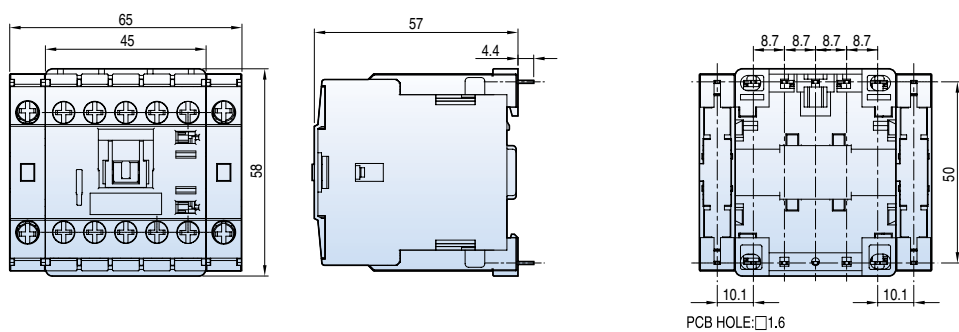

Dimensions

Mini contactor relays




GMR-4MF



[mm]

0.18kg




GMR-4MFD



0.27kg

GMR-6MF




GMR-8MF

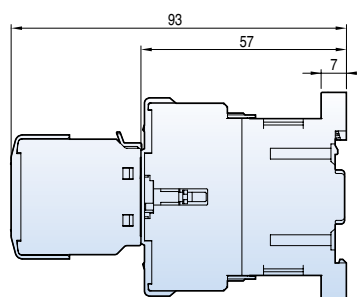

0.23kg


GMR-4MF

2 × +
AU-1MF



0.32kg


GMR-4MC

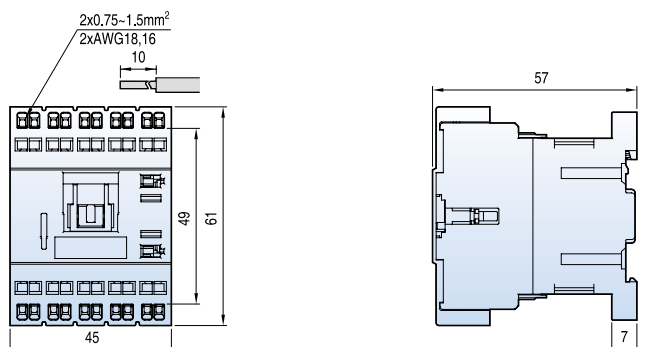

[mm]

0.18kg


GMR-4MCD

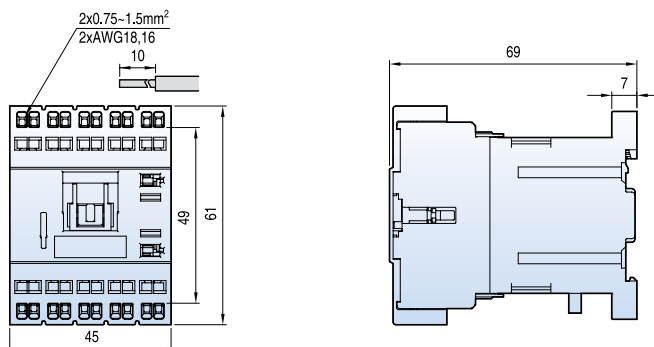

0.27kg

GMR-6MC

GMR-8MC

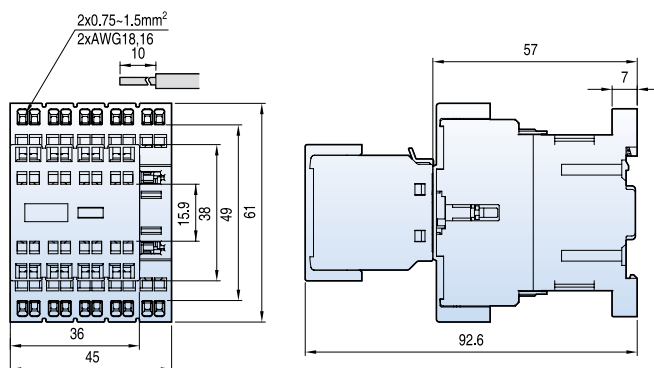


0.23kg

2×

GMR-4MC

+

AU-1MC

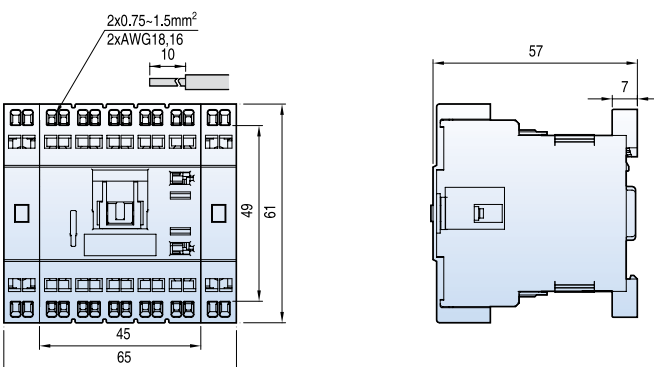




0.32kg

Dimensions

2-pole DC Contactors

SMM-30P

SMM-30DP

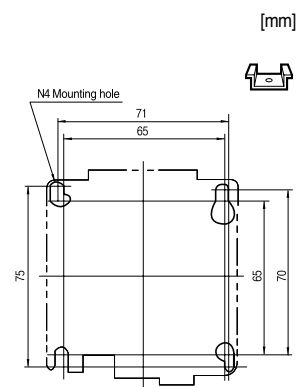




0.61(0.93)kg

SMM-60P

SMM-100P

SMM-60DP

SMM-100DP

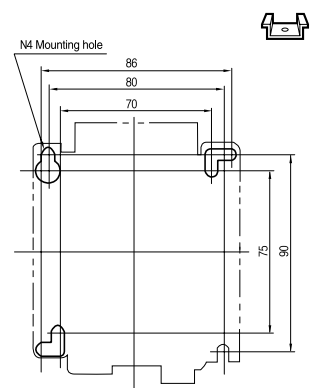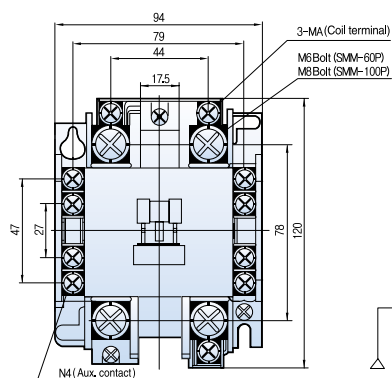

1.15(2.17)kg

2-pole AC Contactors

GMC-10P2

GMC-20P2




GMC-25P2

GMC-30P2

GMC-35P2

GMC-40P2

(TSBS Type)

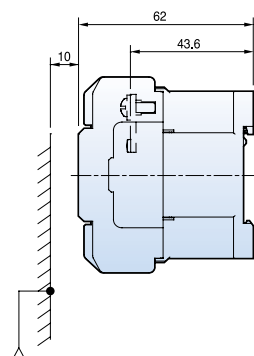

[mm]

1.29kg

GMC-10P2

GMC-20P2




GMC-25P2

GMC-30P2

GMC-35P2

GMC-40P2


(TQBS Type)

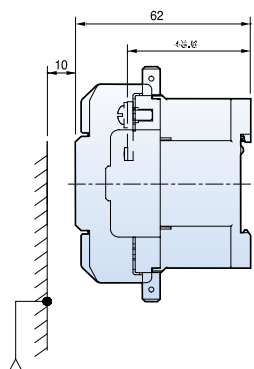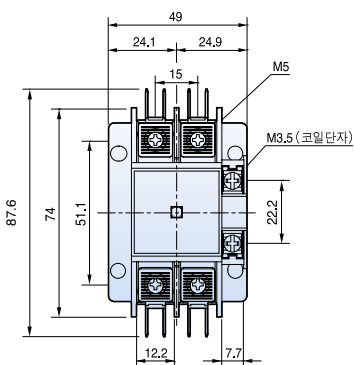

1.29kg


Circuit diagram

GMC-10P2~40P2



Terminal

Type	Terminal	Screw (mm ²)	Wire (kgf·cm)	Torque (mm)	A×B×C
GMC-10P2~40P2	Main	M5	1-16	26	12.2×7×8
	Coil	M3.5	1-2.5	12	7.7×7.5×4.5





Dimensions

Accessories for Mini contactors



[mm]

AU-4M





0.04kg

AU-2M





0.03kg

AU-1M





0.02kg

AT-12M



0.04kg

AS-12M




0.005kg

Memo

Memo

META-MEC





Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.
Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



- According to The WEEE Directive, please do not discard the device with your household waste.



www.lselectric.co.kr

■ Headquarter

LS-ro 127(Hogye-dong) Dongan-gu, Anyang-si, Gyeonggi-Do, 14119, Korea

■ Seoul Office

LS Yongsan Tower, 92, Hangang-daero, Yongsan-gu, Seoul, 04386, Korea
Tel: 82-2-2034-4916, 4684, 4429

■ Overseas Subsidiaries

• LS ELECTRIC Japan Co., Ltd. (Tokyo, Japan)

Tel: 81-3-6268-8241 E-Mail: jschuna@lselectric.biz

• LS ELECTRIC (Dalian) Co., Ltd. (Dalian, China)

Tel: 86-411-8730-5872 E-Mail: jiheo@lselectric.com.cn

• LS ELECTRIC (Wuxi) Co., Ltd. (Wuxi, China)

Tel: 86-510-6851-6666 E-Mail: sblee@lselectric.co.kr

• LS ELECTRIC Vietnam Co., Ltd.

Tel: 84-93-631-4099 E-Mail: jhchoi4@lselectric.biz (Hanoi)
Tel: 84-28-3823-7890 E-Mail: sjbaik@lselectric.biz (Hochiminh)

• LS ELECTRIC Middle East FZE (Dubai, U.A.E.)

Tel: 971-4-886-5360 E-Mail: hschoib@lselectric.biz

• LS ELECTRIC Europe B.V. (Hoofddorf, Netherlands)

Tel: 31-20-654-1424 E-Mail: europartner@lselectric.biz

• LS ELECTRIC America Inc. (Chicago, USA)

Tel: 1-800-891-2941 E-Mail: sales.us@lselectricamerica.com

■ Overseas Branches

• LS ELECTRIC Tokyo Office (Japan)

Tel: 81-3-6268-8241 E-Mail: jschuna@lselectric.biz

• LS ELECTRIC Beijing Office (China)

Tel: 86-10-5095-1631 E-Mail: chendm@khpaek.com.cn

• LS ELECTRIC Shanghai Office (China)

Tel: 86-21-5237-9977 E-Mail: khpaek@lselectric.com.cn

• LS ELECTRIC Guangzhou Office (China)

Tel: 86-20-3818-2883 E-Mail: chenxs@lselectric.com.cn

• LS ELECTRIC Chengdu Office (China)

Tel: 86-28-8670-3201 E-Mail: yangcf@lselectric.com.cn

• LS ELECTRIC Qingdao Office (China)

Tel: 86-532-8501-2065 E-Mail: wangzy@lselectric.com.cn

• LS ELECTRIC Nanjing Office (China)

Tel: 86-25-8467-0005 E-Mail: ylong@lselectric.com.cn

• LS ELECTRIC Bangkok Office (Thailand)

Tel: 66-90-950-9683 E-Mail: sjleet@lselectric.biz

• LS ELECTRIC Jakarta Office (Indonesia)

Tel: 62-21-2933-7614 E-Mail: yjlee@lselectric.biz

• LS ELECTRIC Moscow Office (Russia)

Tel: 7-499-682-6130 E-Mail: jdpark1@lselectric.biz

• LS ELECTRIC America Western Office (Irvine, USA)

Tel: 1-949-333-3140 E-Mail: jwyun@lselectricamerica.com



Technical Question or After-sales Service

Customer Center-Quick Responsive
Service, Excellent technical support

82-1644-5481