

Derwent
Top 100
Global
Innovator
2020

Susol *Super Solution*

Vacuum Circuit Breakers



LS ELECTRIC

VCB

Vacuum Circuit Breakers



Susol VCB is full line-up new VCB which has the high interrupting capacity, large current(~50kA, ~4000A), and maximized compatibility with existing products through the dual phases and compact sized models.

Contents

External structure	26
Basic features and interrupting operation	28
Standards and certification	31
Types and ordering information	32
Type of circuit breakers	42
Ratings	46
Accessories	59
Control circuit diagrams	93
Dimensions	97
Side-Mount type VCB	47
Technical data	249



Susol Series



Susol VCB

Vacuum Circuit Breaker, VCB is installed in the medium voltage distribution lines to protect life and load equipment. In case of accidents such as over current, short circuit and ground fault current, VCB works by interrupting the circuit through the inner Vacuum Interrupter which is acted by signal from the outside separate relay.

LS ELECTRIC' Super Solution, Susol VCB responds.

- customer needs for the breakers with high interrupting capacity and large current due to the integration and increase of the load capacity.
- worldwide trend of diversification in the medium voltage distribution lines.
- increase of the reliability for the temperature characteristics of circuit breakers.

Premium-type products to improve convenience and reliability of medium voltage switchgear configuration.

- full line-up modeling to the high interrupting capacity and large current.
- main structure with high reliability application.
- a variety of accessories and ability to maximize.

Suitable for use as the main circuit breaker to protect key installations in the places such as device industry, power plants, high-rise buildings, large ships.



- Strengthening of the high interrupting capacity and large current models and full line-up new VCB models to high/middle/low.

Voltage	Interrupting current	Rated current
7.2kV	8/12.5/20/25/31.5/40/50kA	400/630/1250/2000/3150/4000A
12kV	20/25/31.5/40/50kA	630/1000/1250/2000/2500/3150/4000/5000A
17.5kV	20/25/31.5/40/50kA	630/1000/1250/2000/2500/3150/4000A
24kV	12.5/25/31.5/40kA	630/1250/2000/2500/3150A
25.8kV	12.5/16/25/31.5/40kA	630/1250/2000/3150A
36kV	25/31.5/40kA	1250/2000/3150A

- Main circuit structure with high reliability.
- Maximizing the durability and reliability of the main circuit contactors (Stego Tulip contactor).
 - Strong structure for the temperature rise (Natural cooling system).
- Convenience of switchgear configuration and a variety of accessories.
- CB compartment structure: Metal isolation structures to prevent the accident spread and ensure safety. And the convenience of switchgear building is extended by its module style.
 - A variety of accessories: UVT, Locking Magnet, Plug Interlock, Key lock, Temperature Sensor, MOC, TOC, Earthing S/W.
 - Maximizing compatibility with existing products through the dualistic deployment of phases and compact models.





Susol VCB Family

Susol VCB series are premium-type products featuring main structure with high reliability application and a variety of accessories and ability to maximize to be suitable for use as the main circuit breaker to protect key installations in the places such as device industry, power plants, high-rise buildings, large ships

7.2kV (VL-06)

- Rated short-time (for withstand current): 3sec.
- Rated operating sequence: O-0.3s-CO-15s-CO
- Type test level: M2, E2 (List1), C2
- 100% Compatibility
 - with existing fixed type breakers
 - with existing drawout type breakers
- Various cradle: E, F and G type
- A variety of control power
 - DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V
 - AC 48V, AC 100~130V, AC 220~250V
- A variety of accessories
 - Charge switch, UVT, Secondary trip Coil, Current trip coil, Position S/W
 - Key-lock, Button lock, Button cover, Padlock, UVT, Time Delay Controller, CTD
- Anti Pumping Device
- TEST/SERVICE Automatic Position Indicator
- Standards and certification
 - IEC62271-100 (2012) [M2, C2, E2 (List1)]
 - Tested in enclosure
 - KERI type tested, V-check (KESCO) certification



Ur (kV)	Isc (kA)	Ir (A)
7.2	8	400
	12.5	630



Full line – up & Compact

Full line-up new VCB models to the high interrupting capacity and large current (~ 50kA, ~ 5000A) featuring maximization of compatibility with existing products through the dualistic deployment of phases and compact models

7.2/12/17.5/24/25.8/36kV (VL-06/12/17/20/25/36)

- Rated short-time (to withstand current): 3sec. 4sec*
- Rated operating sequence: O-0.3s-CO-15s-CO
- Type test level: M2, E2 (List3), C2
- Compatibility with existing Pro-MEC breakers
- Various cradle: E, F, G, Fs, Gs and H type
- CB Compartment for MCSG available
- A variety of control power
 - DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V
 - AC 48V, AC 100~130V, AC 220~250V
- A variety of accessories
 - VCB part: Charge switch, UVT, Secondary trip coil, Position switch, Locking magnet, Plug interlock, Key lock, Button cover, Button padlock, Padlock (H type Door interlock), MOC
 - Cradle part: MOC (Mechanical Operated Cell switch), TOC (Truck Operated Cell switch), Temperature sensor, Earthing switch & Accessories, Door, Door interlock, Door emergency button
 - Others: Racking in/out handle, UVT Time delay controller, CTD (Condenser Trip Device), Temperature module
- Anti Pumping Device
- TEST/SERVICE Automatic Position Indicator
- Standards and certification
 - IEC62271-100 (2012) [M2, C2, E2 (List3)]
 - KEMA, KERI type tested, V-check (KESCO) certification

Note *) * Please contact us



Ur (kV)	Isc (kA)	Ir (A)
7.2	20	630 1250 2000
	25	630 1250 2000
	31.5	630 1250 2000
12	20	630 1000 1250 2000
	25	630 1000 1250 2000
	31.5	630 1250 2000 2500
17.5	20	630 1250 2000
	25	630 1250 2000
	31.5	630 1250 2000 2500
24, 25.8	12.5	630 1250
	16	630 1250
	25	630 1250 2000 2500
36	25	630 1250 2000 2500

7.2/12/17.5/24/25.8/36kV (VH-06/12/17/20/25/36)

- Rated short-time (to withstand current): 3sec. 4sec*
- Rated operating sequence: O-0.3s-CO-15s-CO, (O-0.3s-CO-3min-CO **)
- Type test level: M2, E2 (List3), C2
- Electrical and mechanical life: 20,000 operations
- Various cradle: K, Fs, Gs and H type
- CB Compartment for MCSG available
- A variety of control power
 - DC 48V, DC 110V, DC 125V, DC 220V
 - AC 48V, AC 110V, AC 220V
- A variety of accessories
 - VCB part: UVT, Secondary trip coil, Latch checking switch, Position switch, Locking magnet, Plug interlock, Key lock, Button cover, Button padlock, Padlock (H type Door interlock), MOC
 - Cradle part: MOC (Mechanical Operated Cell switch), TOC (Truck Operated Cell switch), Temperature sensor, Earthing switch & Accessories, Door, Door interlock, Door emergency button
 - Others: Racking in/out handle, Lifting hook, UVT Time delay controller, CTD (Condenser Trip Device), Temperature module
- Anti Pumping Device
- Standards and certification
 - IEC62271-100 (2012) [M2, C2, E2 (List3)]
 - KEMA, KERI type tested, V-check (KESCO) certification

Note) * Please contact us
** Please refer to ratings


Ur (kV)	Isc (kA)	Ir (A)
7.2	31.5	1250
12	12	2000 3150
	40	1250 2000 3150 4000
	50	1250 2000 2500 3150 4000
17.5	31.5	3150
	40	1250 2000 3150
	50	1250 2000 2500 3150
24	25	2500
25.8	31.5	1250 2000 3150
	40	1250 2000 3150
36	25	1250 2000 3150
	31.5	1250 2000 3150
	40	1250 2000 3150



VCB Cradle type


Main circuit structure
with high reliability

Susol VCB

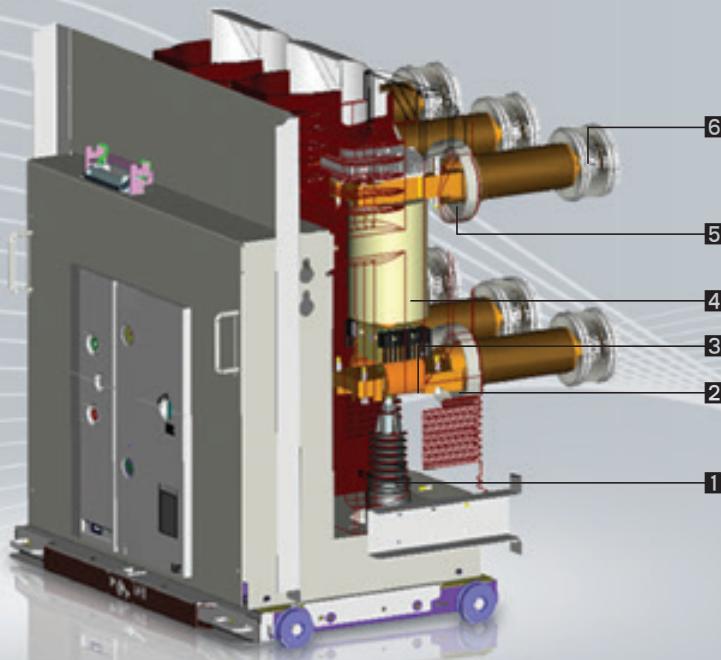

Breaker

- 1 Insulation rod
- 2 Lower terminal
- 3 Shunt
- 4 Vacuum interrupter
- 5 Upper terminal
- 6 Tulip contactor

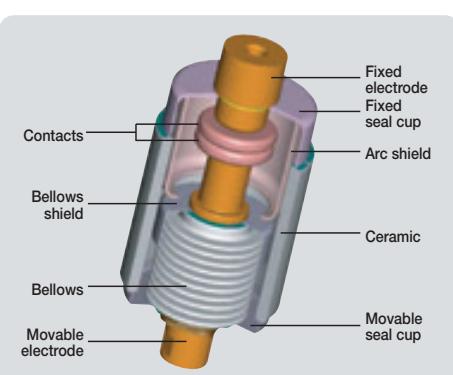

Vacuum Interrupter, VI

The vacuum rate within the VI is very high (approximately 5×10^{-5} Torr) and the spacing between fixed contact and movable contact is about 6~20mm, depending on the voltage.

The contacts are in a structure that arc can easily be extinguished and the surfaces of

the contacts are made of special alloy (copper-chromium) and the interior is completely sealed to prevent loss of vacuum.

Therefore the wearing of the contacts can be minimized in the event of short-circuit and the arc energy by overvoltage or switching can be reduced effectively.

Convenience and Variety


- Maximizing the durability and reliability of the main circuit contactors
(Stego Tulip contactor)
- Strong structure for the temperature rise
(Natural cooling system)



Stego Tulip

Main circuit structure with high reliability

- Maximizing the durability and reliability of the main circuit contactors (Stego Tulip contactor)
- Strong structure for the temperature rise (Natural cooling system)

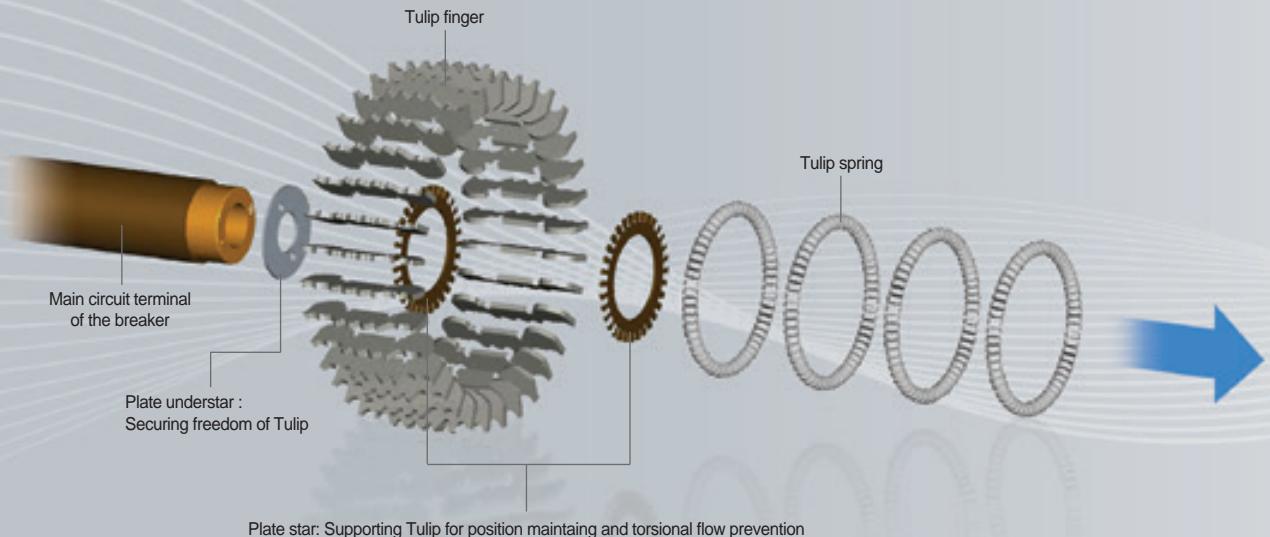

Structure of Stego Tulip Terminal

- Maintaining the connection between breaker and cradle for the optimum current path through securing freedom of Tulip.
- Increasing the heat dissipation area of the contactors and minimizing aging.





Major supply records

- S Electro-Mechanics, Busan plant: 12kV 40kA 4000A VCB
- P Combined cogeneration power plant: 7.2kV 50kA 4000A VCB
- K Petrochemical, Ulsan plant: 7.2kV 40kA 4000A VCB
- P Steel plant, Gwangyang: 7.2kV 50kA 4000A VCB
- P Steel plant, Pohang: 7.2kV 50kA 4000A VCB
- L Chem, Cheongju plant: 7.2kV 40kA 4000A VCB
- S Electronics, Tangjeong plant: 7.2kV 40kA 4000A VCB

7.2/12/17.5/24/25.8/36kV...

(VH-06/12/17/20/25/36)

- Drawout / natural cooling system
- Improved temperature characteristics and ensured high reliability

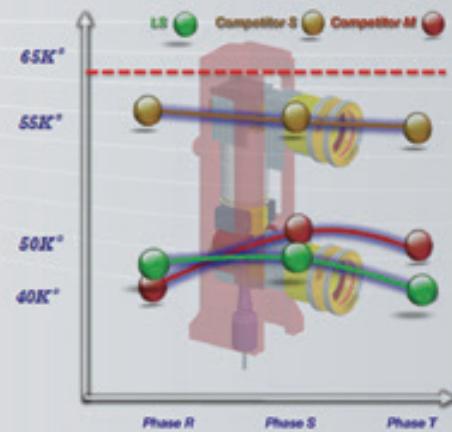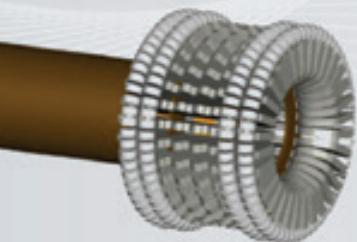

VL type Tulip contactor



VH type Tulip contactor




36kV Tulip contactor

CB Compartment

Convenience in building switchgears

- CB compartment structure: H type cradle
- Metal isolation structure to prevent the accident spread and ensure safety
- Convenience of switchgear building

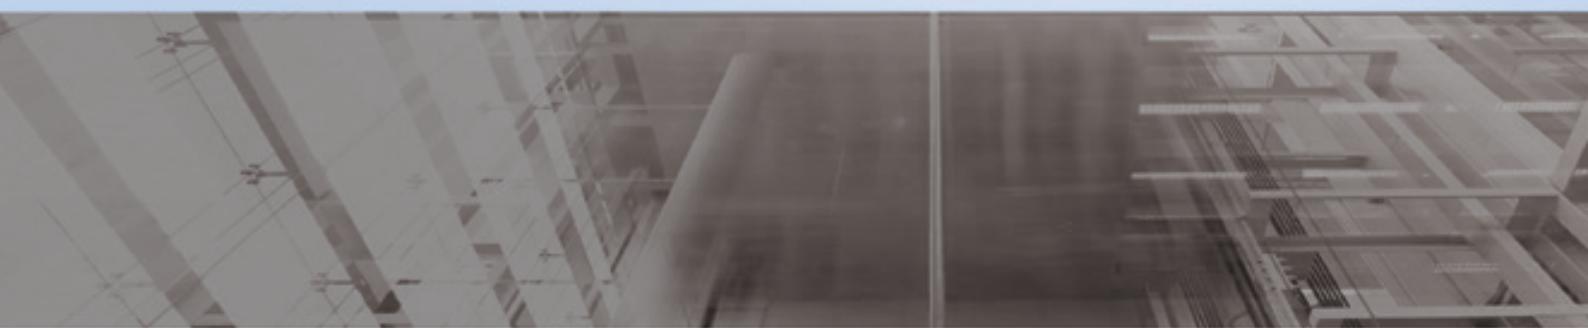

7.2/12/17.5/24/25.8/36kV 20/25/31.5/40/50kA

- Metal isolation structure to prevent the accident spread and ensure safety
- Convenience of operation by Truck
 - Drawable in the closed position of the switchgear door
 - Racking-in/out positions indicated mechanically
- Equipped with safety devices and accessories
 - Control power connected Interlock
 - Earthing S/W and interlock, MOC/TOC (ANSI)
- Convenience in building switchgears
 - Module assembly with CB compartment






Accessories of CB compartment (H type cradle)

- MOC (Mechanism Operated Cell S/W)
- TOC (Truck Operated Cell S/W)
- Shutter Padlock
- Temperature Sensor
- Door Emergency ON/OFF Button
- Earthing switch & Accessories
- Key lock for Earthing S/W
- Locking Magnet for Earthing S/W
- Position S/W for Earthing S/W
- TM (Temperature Monitoring Unit)

Cradles

E, F, G, K and H type... Variety of the Cradles

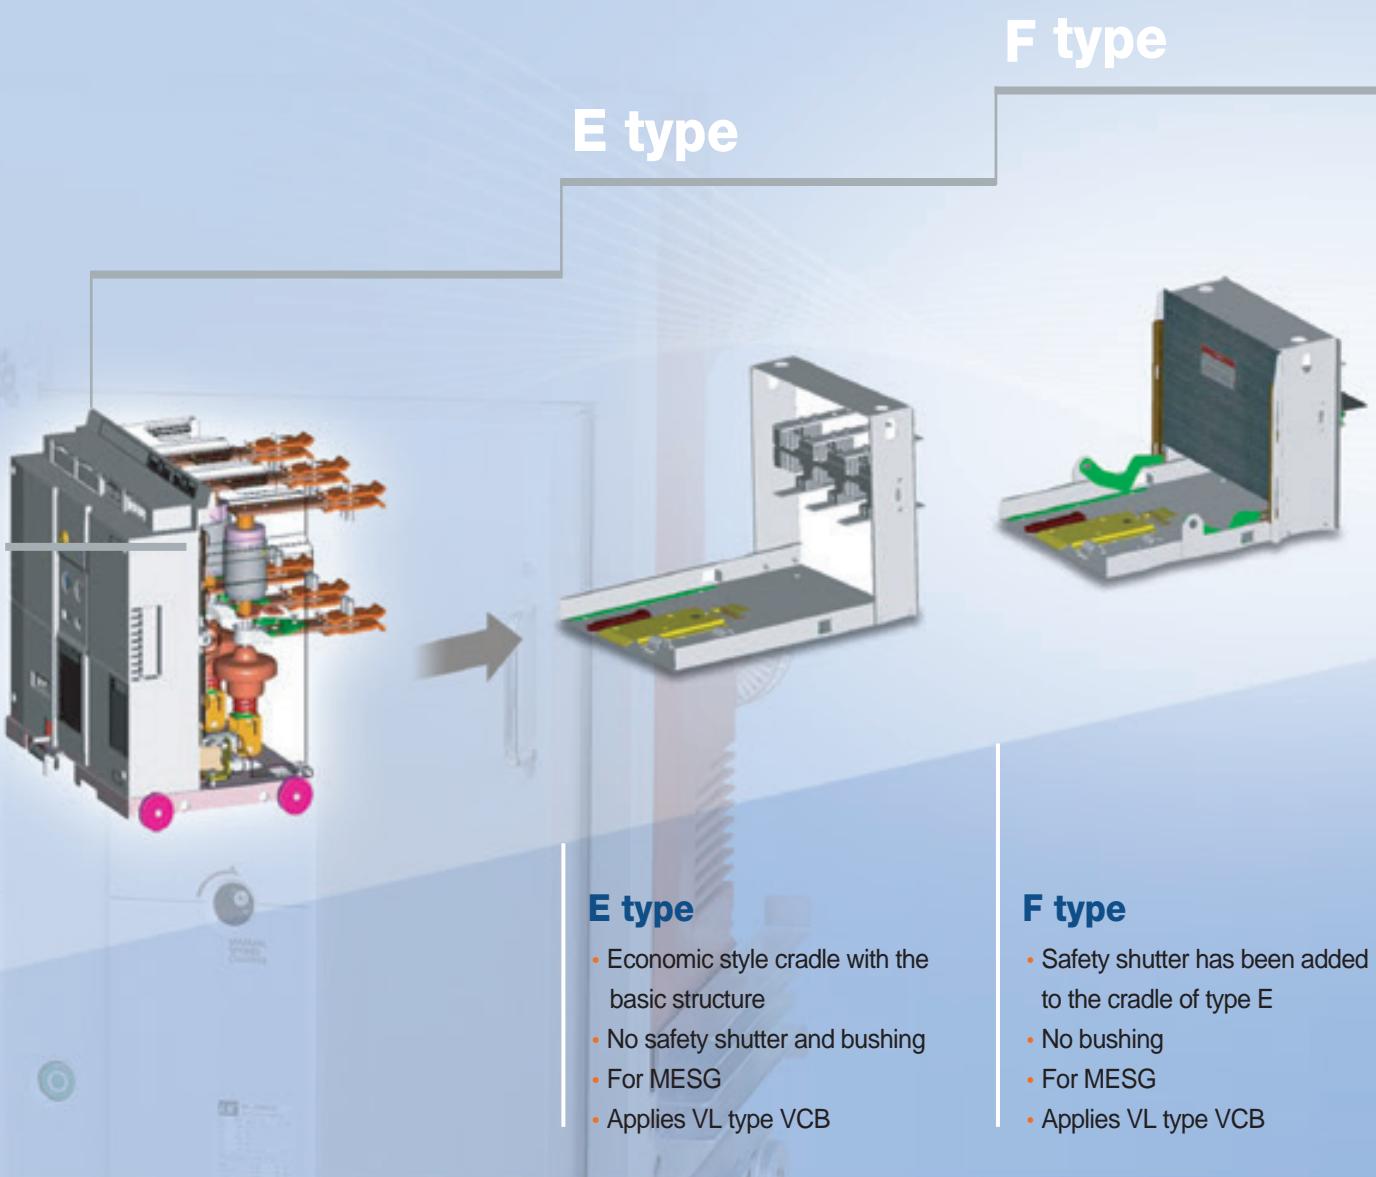



E type



F type



H type

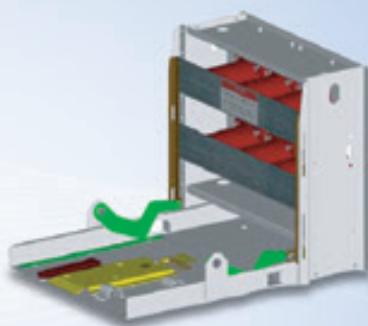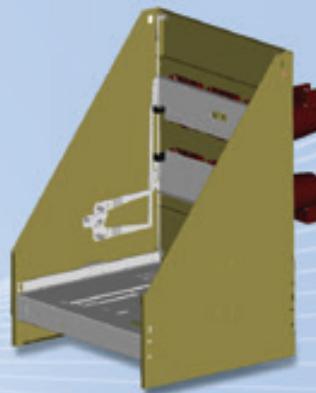G type**K type****H type****G type**


- Premium style cradle with safety shutter and bushings
- For MESG
- Applies VL type VCB

K type

- Premium style cradle with metal safety shutter and bushings
- Metal isolated structure: To prevent spreading accident and secure safety
- More convenient by withdrawable Truck
- For MCSG
- Applied to medium capacity/high capacity VCB

H type

- Metal isolation structure to prevent the accident spread and ensure safety
- Convenience of operation by Truck
 - Drawable in the closed position of the switchgear door
 - Racking-in/out positions indicated mechanically
 - Control power connected Interlock
- Convenience in building switchgears
 - Module assembly with CB compartment
 - Assembly with CT/PT integrated compartment
- Applies VL/VH type VCB

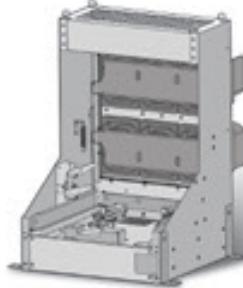

Ha type

Hb type

VH type


Convenience

Convenience in building switchgears


- Maximizing compatibility with existing products through the dualistic deployment of phases and compact models.

VCB rating

Ur (kV)	Isc (kA)	Ir (A)
12	20/25	630
	31.5	1000
		1250
17.5	20/25	630
	31.5	1250

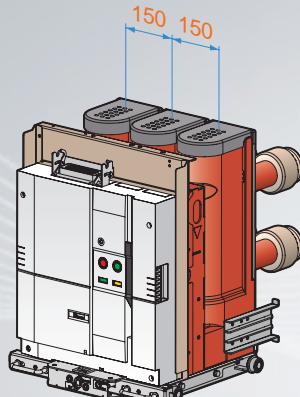


P150
(distance between phases: 150mm)

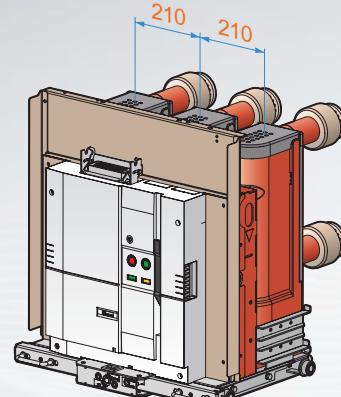


P210
(distance between phases: 210mm)

VCB rating

Ur (kV)	Isc (kA)	Ir (A)
12	20/25	2000
17.5	20/25	2000

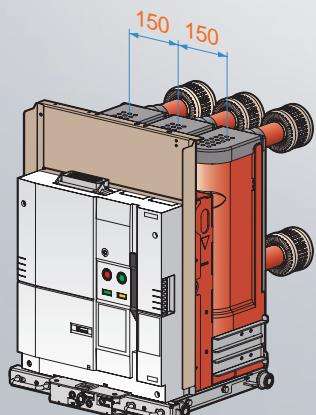


P150
(distance between phases: 150mm)

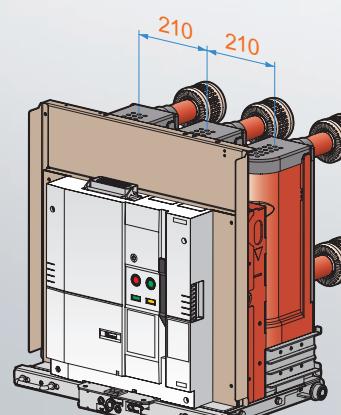

P210
(distance between phases: 210mm)

VCB rating

Ur (kV)	Isc (kA)	Ir (A)
12	31.5	2500
	17.5	


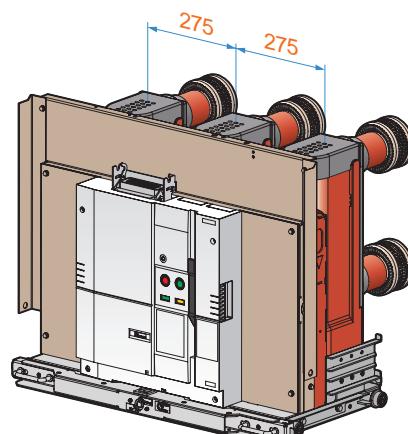


P275
(distance between phases: 275mm)



VCB rating

Ur (kV)	Isc (kA)	Ir (A)
24	12.5	630
		1250
	16/25	630
		1250
25	2000	
		2500 *
25.8	12.5	630
		1250
	16/25	630
		1250
	25	2000
		2500 *

* 2500A: phases distance 275mm only


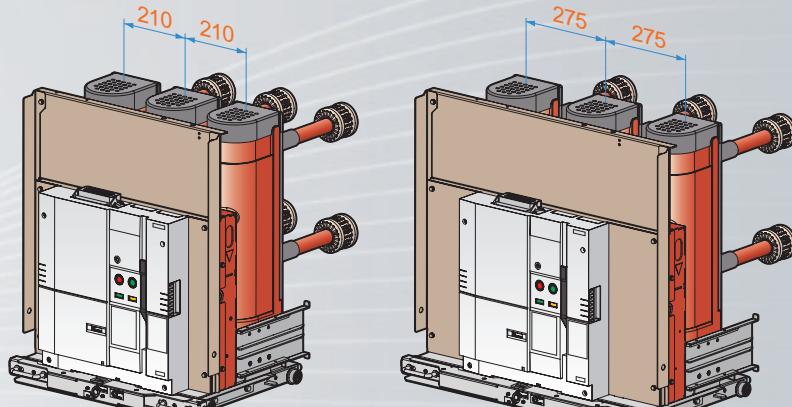
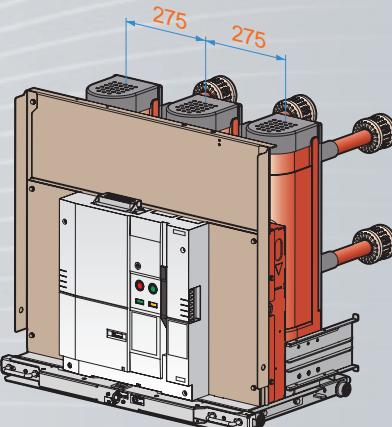
P210
(distance between phases: 210mm)P275
(distance between phases: 275mm)**VCB rating**

Ur (kV)	Isc (kA)	Ir (A)
24	31.5/40	2000
25.8	31.5/40	2000

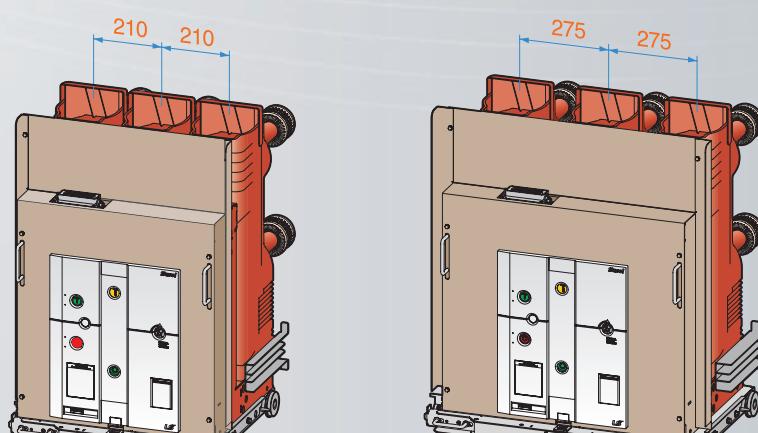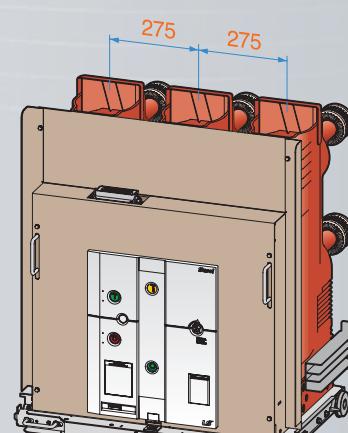P210
(distance between phases: 210mm)P275
(distance between phases: 275mm)**Function to locking a breaker during transport of a switchgear**

- Fixed bracket must be dismantled first to rack in a breaker - interlocking system

Fix bracket easily visible from the front of the breaker

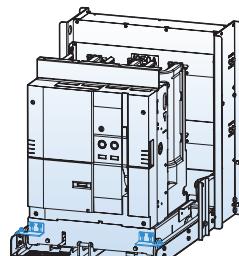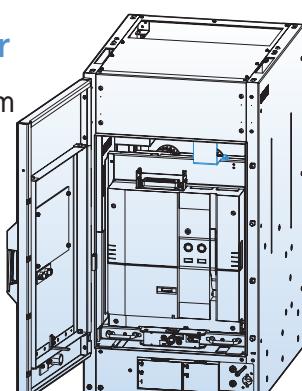
VL type VCB (VL-06)
(E/F/G type)VL type VCB (VL-06/12/17)
(E/F/G type)VL/VH type VCB
(H type CB compartment)

Accessories

A variety of accessories for VL-06

If accessories are attached to the breaker, the function of the breaker is upgraded.

Susol VCB provides a variety of accessories depending on the purpose.

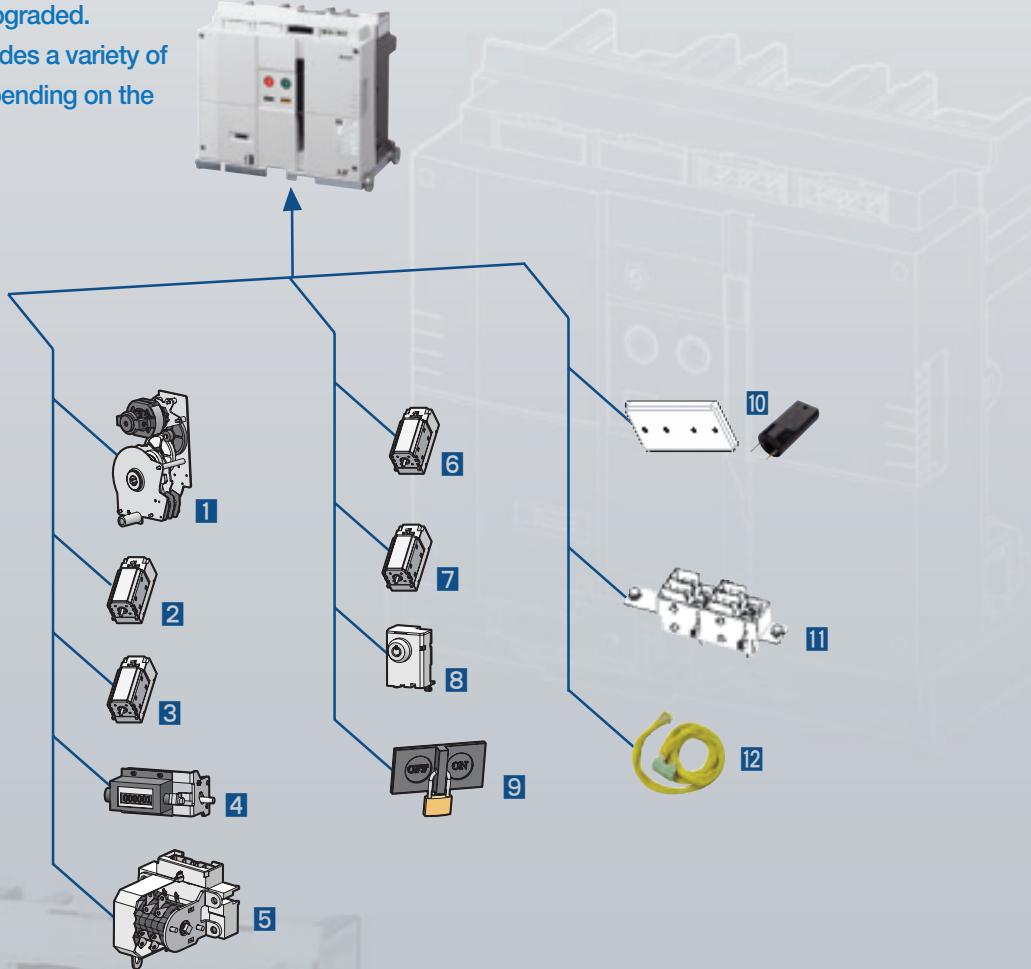


Breaker

- | | |
|-----------------------------|----------------------------|
| 1 Motor | 7 Current trip coil |
| 2 Closing coil | 8 Key lock |
| 3 Trip coil | 9 Button padlock |
| 4 Counter | 10 Button cover |
| 5 Auxiliary contacts | 11 Position switch |
| 6 UVT coil | 12 Lead wire |

A variety of accessories for VCL-06

If accessories are attached to the cradle, the function of the breaker is upgraded.

Susol VCB provides a variety of accessories depending on the purpose.

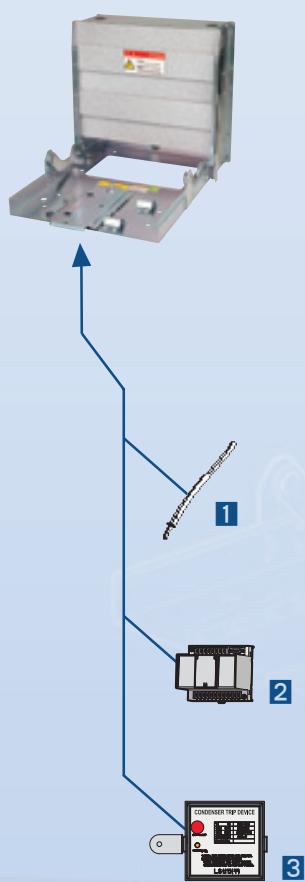

Cradle


- 1 Handle for Racking-in and out
- 2 UVT time delay controller
- 3 Condenser trip device

Accessories

A variety of accessories for VL-06/12/17/20/25/36

If accessories are attached to the breaker, the function of the breaker is upgraded.

Susol VCB provides a variety of accessories depending on the purpose.

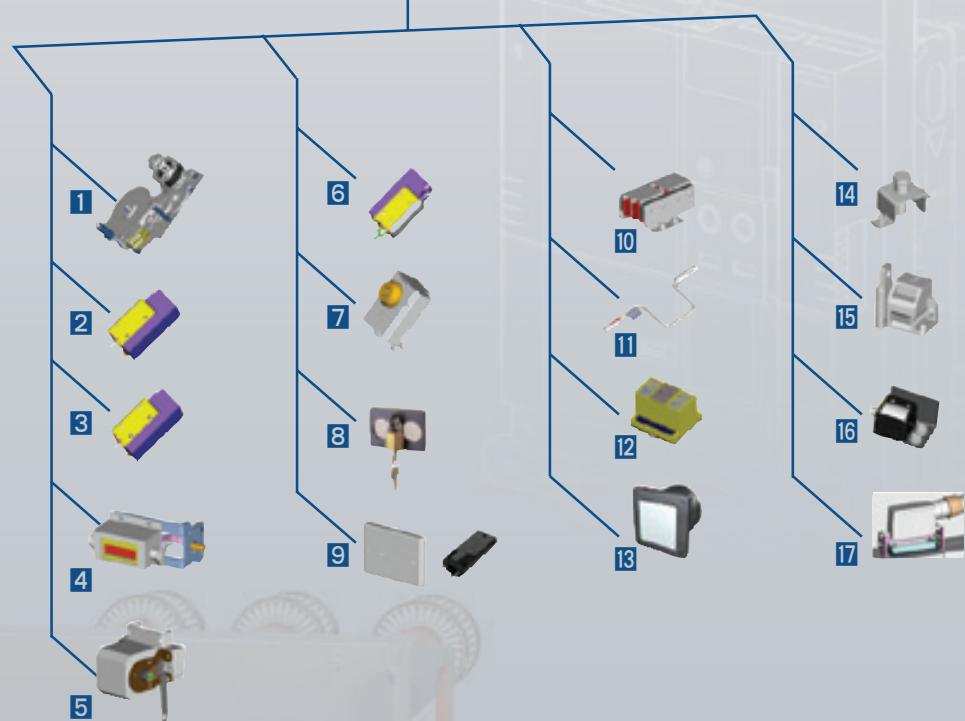

Breaker


- 1 Motor
- 2 Closing coil
- 3 Trip coil
- 4 Counter
- 5 Auxiliary contacts
- 6 UVT coil
- 7 Key lock
- 8 Button padlock
- 9 Button cover

- 10 Position switch
- 11 Handle for Racking-in/out
- 12 UVT time delay controller
- 13 CTD (Condenser trip device)
- 14 MOC (Mechanism operated cell switch)
- 15 Padlock (H type Door Interlock)
- 16 Locking magnet
- 17 Plug Interlock

A variety of accessories for VL-06/12/17/20/25/36

If accessories are attached to the cradle, the function of the breaker is upgraded.

Susol VCB provides a variety of accessories depending on the purpose.

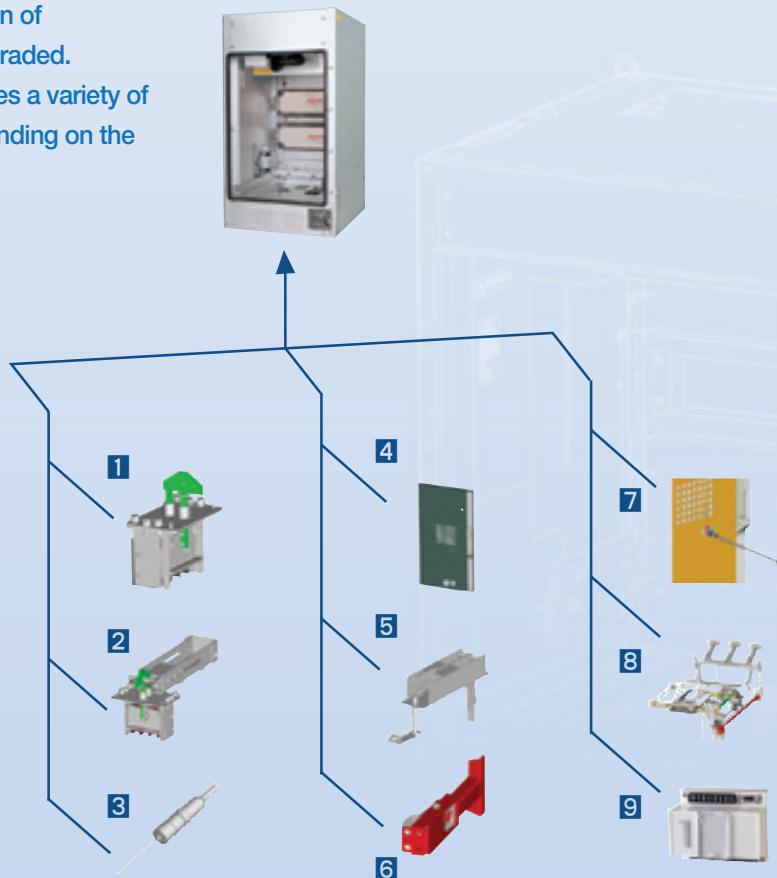

Cradle (H type)

- 1 TOC (Truck operated cell s/w)
- 2 MOC (Mechanical operated cell s/w)
- 3 Temperature sensor
- 4 Door
- 5 Door interlock
- 6 Shutter padlock

- 7 Emergency ON/OFF button
- 8 Earthing switch & Accessory
- 8.1 Key lock for Earthing switch
- 8.2 Locking Magnet for Earthing switch
- 8.3 Position s/w for Earthing switch
- 9 TM (Temperature monitoring unit)

Accessories

A variety of accessories for VH-06/12/17/20/25/36

If accessories are attached to the breaker, the function of the breaker is upgraded.

Susol VCB provides a variety of accessories depending on the purpose.



Breaker


- 1 Motor
- 2 AC/DC coil rectifier
- 3 Trip coil/Closing coil
Secondary trip coil
- 4 AC/DC UVT coil rectifier
- 5 UVT coil
- 6 Latch checking switch

- 7 Auxiliary contact wire
- 8 Key lock
- 9 Button cover/Push bar
- 10 Button padlock
- 11 Position switch
- 12 Locking magnet
- 13 Plug interlock

- 14 Door Interlock for withdrawable type
- 15 Lifting hook
- 16 Charge handle
- 17 Racking in/out handle
- 18 UVT Time delay controller
- 19 CTD (Condenser trip device)
- 20 Wireless Temp. monitoring sensor

A variety of accessories for VH-06/12/17/20/25/36

If accessories are attached to the cradle, the function of the breaker is upgraded.
Susol VCB provides a variety of accessories depending on the purpose.

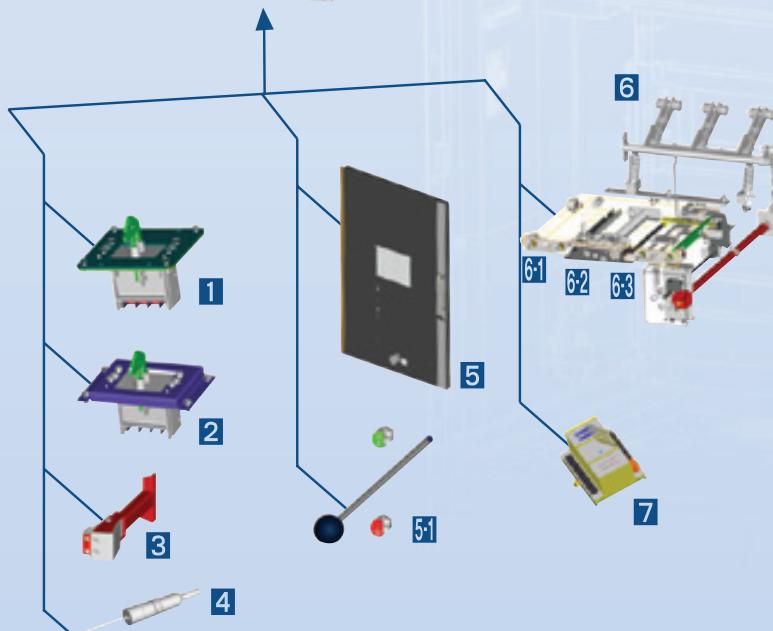

Cradle (H type)


- 1** MOC (Mechanism operated cell switch)
- 2** TOC (Truck operated cell switch)
- 3** Shutter padlock
- 4** Temperature sensor
- 5** Door
- 5-1** Emergency ON/OFF button

- 6** Earthing switch & Accessories
 - 6-1** Key lock for Earthing switch
 - 6-2** Locking magnet for Earthing switch
 - 6-3** Position switch for Earthing switch
- 7** TM (Temperature monitoring unit)


Standards and certifications

E2 (List 1 or List3)

E2 (List3) is first proposed in the IEC 62271-100(2008) to improve the efficiency of the interrupting test. According to it the number of interrupting test T60 is increased instead of fewer number of T10 and T30 compared to the existing List1. List3 compared with the List1 maintains the equivalent of the test but has severe test conditions because 34% higher arc energy applied to the breaker. List3 is applied to Susol VCB series.

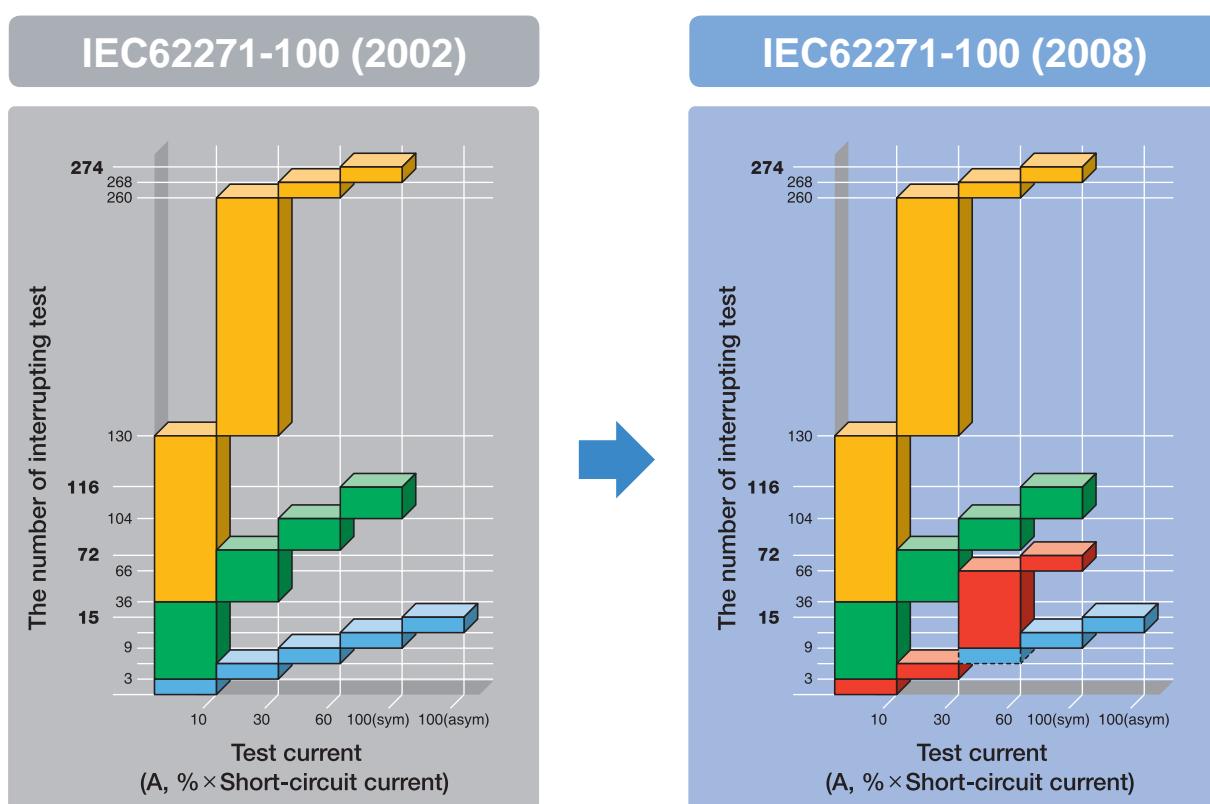

Arc Energy: List 1 (100%) < List 2 (125%) < List 3 (134%)

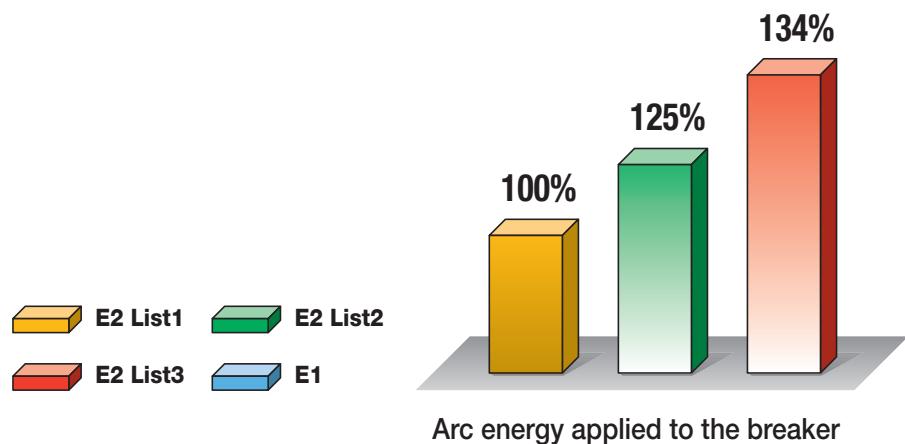

M2, C2

IEC standards to verify the reliability of the product allows to select the quality level for the product to be tested according to its real performance and practical usage. The highest quality level of M2, C2 has been applied to Susol VCB.

M1 and M2: Test to determine the mechanical durability grade

2000 operation test		
Sequence	Control Voltage	Number of operations
C-O	85%	500
C-O	100%	500
C-O	110%	500
O-CO-C	100%	250

M2



M1



- Pre-test (characteristics, isolation, and temperature)
- Confirmative tests after the completion of 2000 operations (Characteristics, isolation, temperature)

- Pre-test (characteristics, isolation, and temperature)
- Confirmative tests after every 2000 operation
- Confirmative tests after the completion of 10,000 operations (Characteristics, isolation, temperature)

C1, C2: Capacitive current breaking test is to verify the probability of restriking and C2 class is secured for all Susol VCB.



2 restrikes are allowed during "O" 24 operations and "CO" 24 operations



Restrike is not allowed during "O" 24 operations and "CO" 24 operations

External structure of VCB

Susol

Breaker ... VL type



Name of each part

- ① Push ON Button
- ② Push OFF Button
- ③ Charge/Discharge Indicator
- ④ ON/OFF Indicator
- ⑤ Manual Charging Handle
- ⑥ Key Lock
- ⑦ Operation Counter
- ⑧ TEST/SERVICE Position Indicator

Back side



Breaker ... VH type



Name of each part

- ① Push ON Button
- ② Push OFF Button
- ③ Charge/Discharge Indicator
- ④ ON/OFF Indicator
- ⑤ Manual Charging Handle
- ⑥ Key Lock
- ⑦ Operation Counter
- ⑧ TEST/SERVICE Position Indicator

Back side



Basic functions and interrupting operation

Susol

Basic functions

Manual operation

① Manual Charge

- a) VL type: operate the charge handle 7-8 times as a fully stroke.
- b) VH type: Insert the charge handle into the handle slot first. Rotate the handle clockwise 40 times more and then charge will be complete with a click sound.
 - When the closing spring is charged fully "CHARGED" is displayed at the charge indicator.

② Manual closing

- a) Pressing the ON button the breaker is closed.
- b) With the closing of the breaker "ON" is displayed at Close/Trip indicator and "DISCHARGED" at the charge indicator.

③ Manual trip

- a) Pressing the OFF button the breaker is opened.
- b) "OFF" is displayed at Close/Trip indicator.

Electric operation

① Electric charge

The breaker is remotely closing with charging of closing spring.
If the breaker closing the closing spring is automatically charged by gear motors.

② Electric closing

Remote closing is operated by the closing coil.


③ Electric trip

Remote trip can be operated by the trip coil or UVT coil.

Main contacts are operated by the energy of the spring mechanism and closing spring is charged by the motor in the mechanism.

Breaker is closed by closing coil and tripped by trip coil.

These operations are repeated in VCB as shown in the below sequence chart.

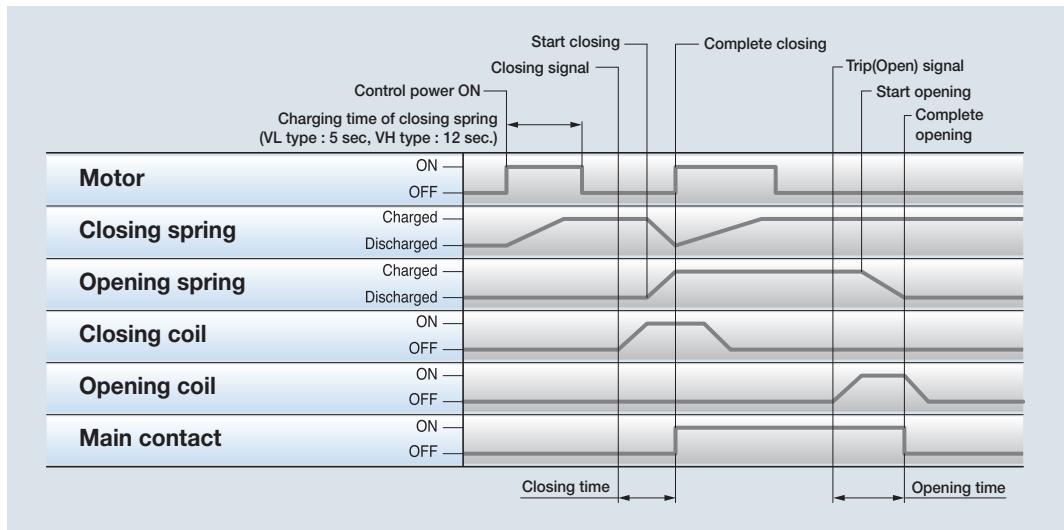



Sequence of the switching mechanism

Basic functions and interrupting operation

Susol

The interruption of vacuum interrupters

The interruption of VCB is carried out by the vacuum interrupters. Interrupter contacts as a key part made of copper - chromium (CuCr) material with spiral shape have low contact wear characteristics and withstand voltage is excellent. Spiral contacts make the arc generated between the surfaces of contacts rotated around the surface of contact by the induced magnetic field generated due to the spiral contact structure, which results in preventing local heating, thereby corruption and interrupting instantaneously.

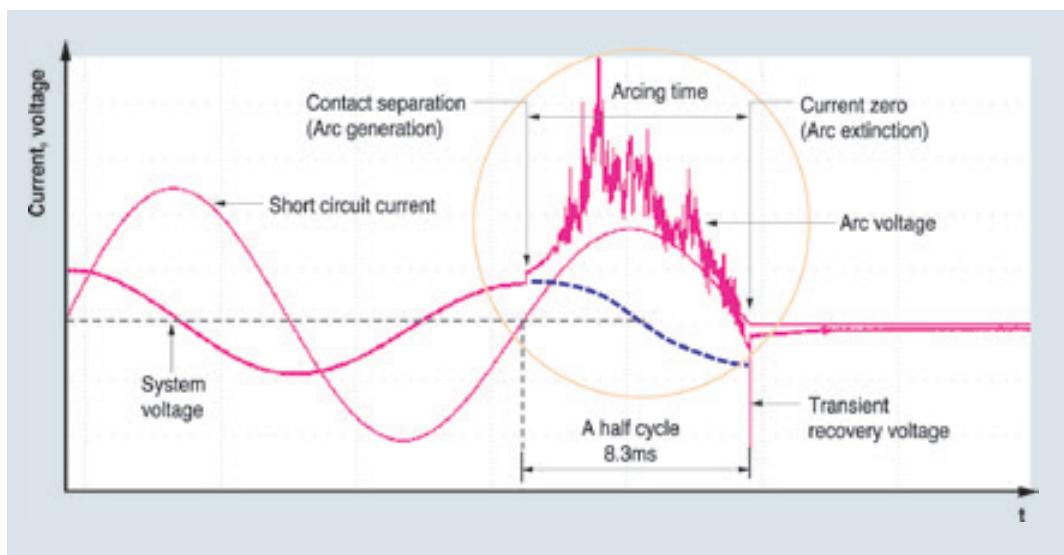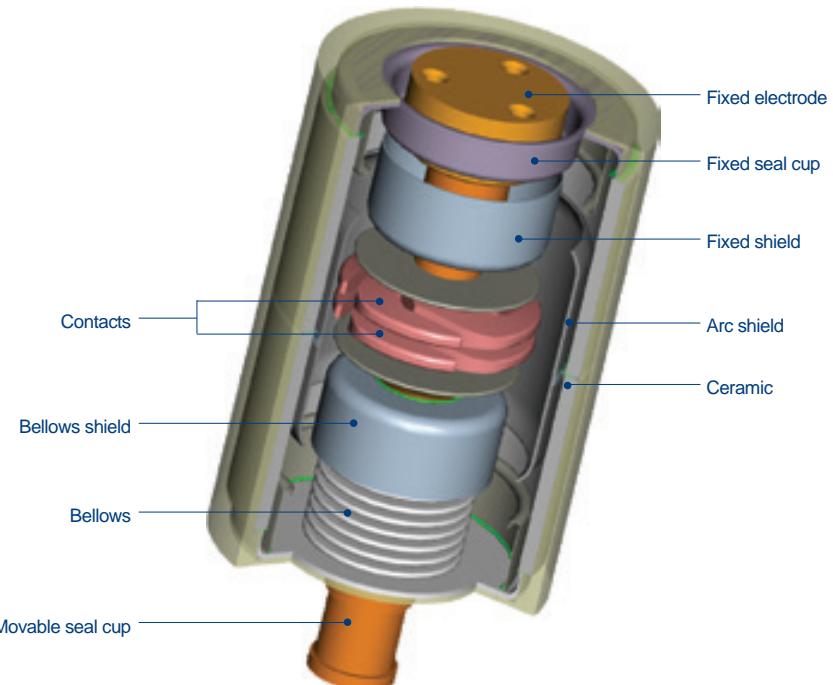


An example of oscillogram obtained through the interrupting test using LC resonant circuit

Basic functions and interrupting operation

Susol

The interruption of vacuum interrupters

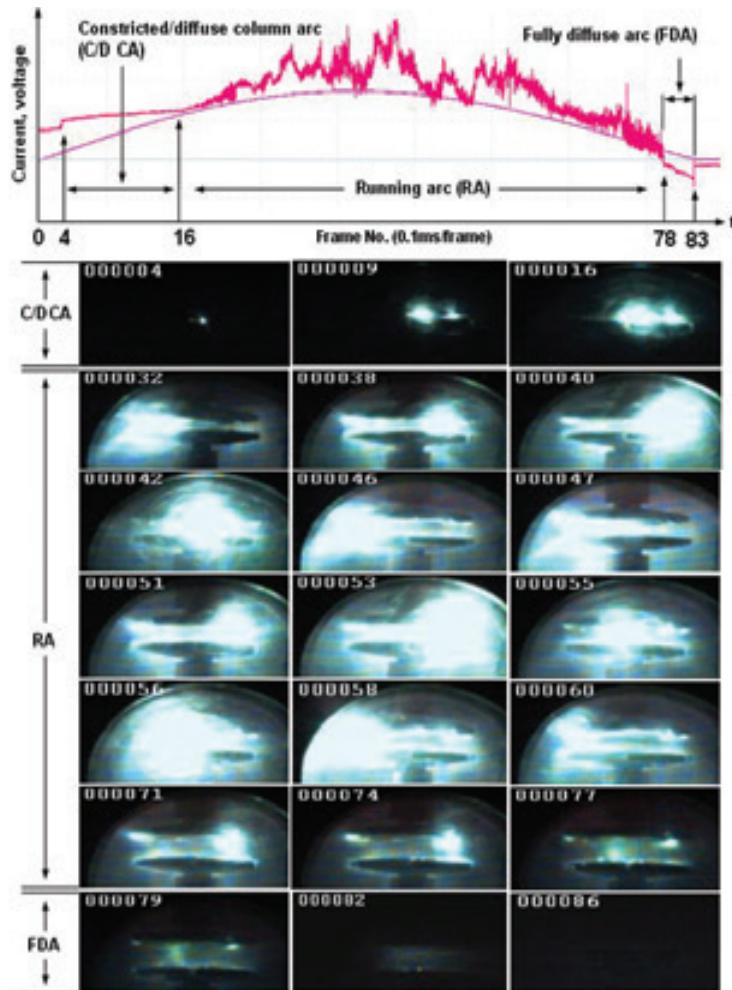


Arc voltage waveforms and arc image captured during arcing time

Spiral contact structure (Radial magnetic field), using the force ($F = j \times B$) generated by the interaction of the radial magnetic field caused by the current flowing through the arc between two contacts, disperse the arc energy evenly on the surface of contact by rotating the arc that is contracted by the pinch effect so as to minimize contact damage.

The images show arc behavior during the arcing time of about 8ms by shooting with high-speed camera capable of shooting 10,000 frames per sec. (10000FPS) by focusing on parts of the arcing time on the above graph and simultaneously measured arc voltage also represented to show arc state by section.

In case of using the flat contact any of the designs do not reflect on when contacts are opening the arc with high temperature is contracted and fixed in the center of the contacts, Which is called pinch effect.

To prevent the effect two kinds of contact shapes are designed. One is Axial magnetic field which spreads the arc before its contraction, and the other is Radial magnetic field which permits the contraction of the arc but makes it rotated to disperse the energy. Because contracted arc is shaped like a cylinder it is called Contracted arc or columnar arc.

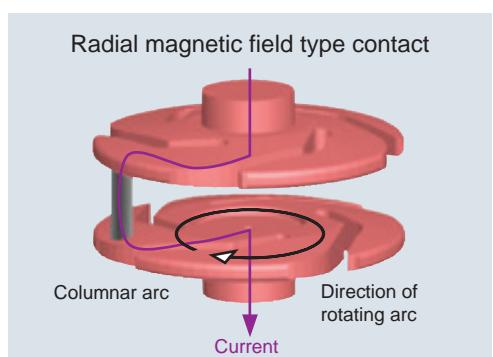

Arc driving principle in the contacts of Radial magnetic field

Standards and certification

Susol

Susol VCB has been type tested and obtained certifications according to the latest IEC standard at international testing laboratory and can be installed and applied at the environment and conditions in accordance with the standard.

● Standard

- IEC 62271-1 (2007.10)
High-voltage switchgear and controlgear - Part 1: Common specifications.
- IEC 62271-100 (2008.04)
High-voltage switchgear and controlgear - Part 2: Alternating-current circuit breakers.

● Test and certification

- Test report (KERI)
- Test report (KEMA)



TEST REPORT	
CLASSIFICATION	Type Test
APPARATUS	Vacuum Circuit Breaker
DESIGNATION	IH-26C360303
RATING	Current 35.6 kA 3 500 A, AC IR 60 Hz
APPLIED STANDARD	IEC 62271-1:2008-04
RECEIPT No.	TR020900008 - December 11, 2008
APPLICANT	LS Industrial Systems Co., Ltd. Songdo-dong 1, Hungdeok-gu, Cheongju-si, 361-720, Korea
MANUFACTURER	LS Industrial Systems Co., Ltd. Songdo-dong 1, Hungdeok-gu, Cheongju-si, 361-720, Korea
DATE OF TESTS	June 30, 2008 - September 21, 2008
DATE OF ISSUE	December 14, 2008
The test results have been carried out in accordance with IEC 62271-1:2008-04 applicant's specification.	
The test results are presented in the records of tests with the performance of the apparatus and the observations made during the tests. The observations are as follows.	
The observed values and the general performances are considered to comply with requirements of the above standard for the deformed type tests.	
The test results apply only to the tested specific samples. This document shall not be reproduced except in full, without a written approval.	
No. Of PAGES	records (47), photographs (4), circuit diagrams (X), insulation drawings & descriptions (20), measurements (30)
INCORPORATED	 KERI, Korea Electrotechnology Research Institute, 100 Gajeong-ro, Yuseong-gu, Daejeon, 305-343, Korea, Tel: +82-42-8690-4144, Fax: +82-42-8640-4489, Web: http://www.keri.re.kr
Prepared by	
Verified by	
Approved by	
Power Apparatus Testing & Evaluation Dept.	
KERI KOREA ELECTROTECHNOLOGY RESEARCH INSTITUTE 100 Gajeong-ro, Yuseong-gu, Daejeon, 305-343, Korea, Tel: +82-42-8690-4144, Fax: +82-42-8640-4489, Web: http://www.keri.re.kr KERI Laboratories are accredited by ISO/IEC 17025:2005 (Measurement Accreditation)	
D4	
TYPE TEST CERTIFICATE OF CAPACITIVE SWITCHING PERFORMANCE: C94136-L	
APPARATUS	A three-phase withdrawable vacuum circuit breaker in a testing (cradle)
DESIGNATION	LVB-12-25-00 Serial No. 200402020001 LVB-12-25-12 Serial No. 200402020002 LVB-12-25-02 Serial No. 200402020003
Rated voltage	12 kV
Rated normal current	630, 1250, 2000A
Rated short circuit current	25 kA
MANUFACTURER	LS Industrial Systems Co., Ltd., Hungdeok-gu, Cheongju, Korea
CLIENT	LS Industrial Systems Co., Ltd., Hungdeok-gu, Cheongju, Korea
TESTED BY	KEMA-Powerhead, Inc., Chalfont, PA, USA
DATE(S) OF TESTS	Sept. 14-26, 2008
The apparatus, constructed in accordance with the description, drawings and photographs incorporated in this Certificate, has been subjected to the series of proving tests in accordance with IEC 62271-100, sub clause 6.11.1.	
THE RESULTS ARE SHOWN IN THE RECORDS OF PROVING TESTS AND THE DOCUMENTS ATTACHED HERETO. THE VALUES OBTAINED AND THE GENERAL PERFORMANCE ARE CONSIDERED TO COMPLY WITH THE ABOVE STANDARDS AND TO JUSTIFY THE RATINGS ASSIGNED BY THE MANUFACTURER AS LISTED ON PAGE 1.	
This Certificate and Record of Proving Tests applies only to the specific piece of apparatus tested from the particular place of manufacture. The responsibility for conformity of any apparatus having the same description with that tested rests with the manufacturer at the place of manufacture of that apparatus.	
This Certificate consists of 80 pages in total.	
Only reproduction of the complete Certificate, or reproductions of this page accompanied by the pages on which are stated the tests performed and the assigned rated characteristics of the apparatus tested, are permitted without permission from KEMA Incorporated.	
 Form C940P-R0 Date: _____ Certificate Number: 0803-01 Rev. 02/2008	
M. F. Schaefer 	

Types and ordering information

Susol

7.2kV (VL-06)

Breaker

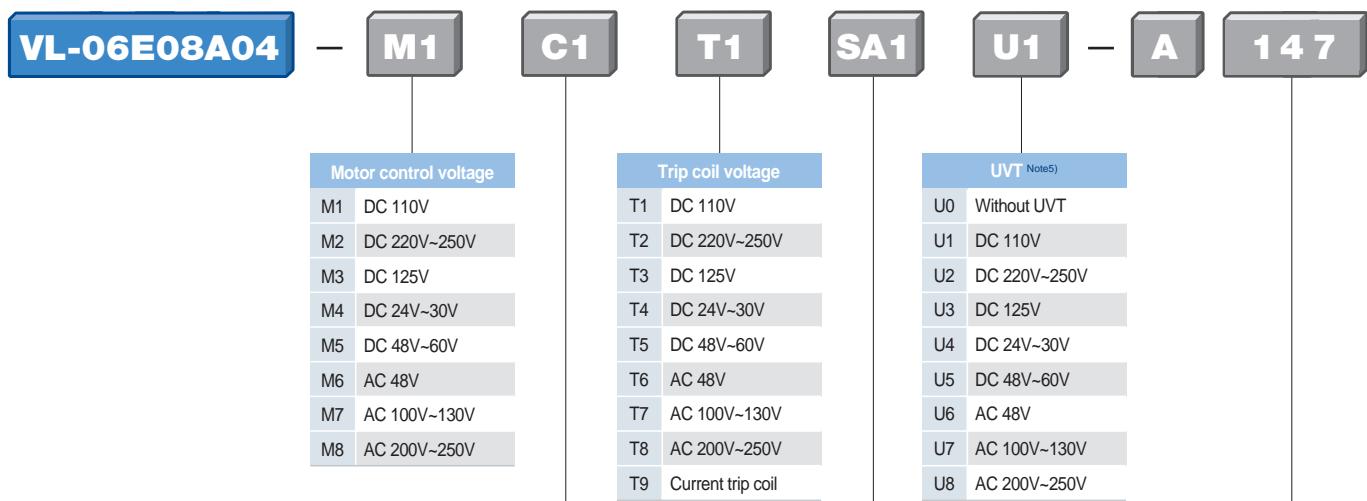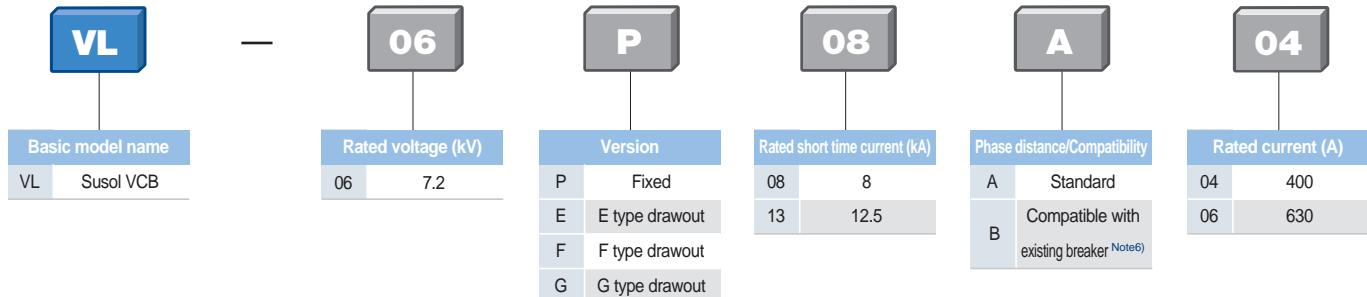

Closing coil voltage		Connector and wire		Other accessories <small>Note</small>	
C1	DC 110V	SA1		A type connector, 2a2b	
C2	DC 220V~250V	SA2	Standard	A type connector, 4a4b	
C3	DC 125V	SA3		A type connector, 6a6b <small>Note5</small>	
C4	DC 24V~30V	SA5		A type connector, 2a2b	
C5	DC 48V~60V	SA6	Flame retardant	A type connector, 4a4b	
C6	AC 48V	SA7		A type connector, 6a6b <small>Note5</small>	
C7	AC 100V~130V				
C8	AC 200V~250V				
Optional					
LH	Lifting Hook				
CTD1	Condenser Trip Device (AC 110V)				
CTD2	Condenser Trip Device (AC 220V)				
UDC1	UVT Time Delay Controller (AC/DC 110V)				
UDC2	UVT Time Delay Controller (AC/DC 220V)				
UDC3	UVT Time Delay Controller (AC/DC 48V)				
CTU	Coil Test Unit				

Note)

- In the case of selecting accessories such as A1(Secondary trip coil), A4(Position S/W 2a2a)and A7(Key lock), A147 is type name in the ordering.
- Unable to select A1(Secondary Trip coil), U1-U8(UVT)and T9(Current trip coil) simultaneously.
- A4(Position S/W 2a2a) and A5(Position S/W 2a2b) can not be selected simultaneously.
- A8 (Button Padlock) and A9 (Button Cover) can not be selected simultaneously.
- Maximum number of Auxiliary Contacts available are 5a5b, 5a6b in the case of selecting A1(Secondary trip coil), U1-U8(UVT).
- In case of using the existing old type cradle and replacing breaker only please order type B (Compatible with existing breaker). Compatible busbars are required for fixed version.
- If T9(CTC) is selected, in case of adding Secondary trip coil, CTC is also added.

Note) A is written only once in case of more than one.

Cradle

VCL	—	06	E	08	A	06
Basic model name		Rated voltage (kV)				
VCL	Susol VCB Cradle	06	7.2			
Version		Rated short time current (kA)				
E	E type drawout	08	8	A	Standard	04
F	F type drawout	13	12.5	B	Compatible with existing cradle <small>Note</small>)	06
G	G type drawout					
Phase distance/Compatibility		Rated current (A)				
		04	400			
		06	630			


Note) In case of replacing the existing old type VCB with Susol VCB please order type B for cradle and A for breaker.

Types and ordering information

Susol

7.2/12/17.5kV (VL-06/12/17)

Breaker

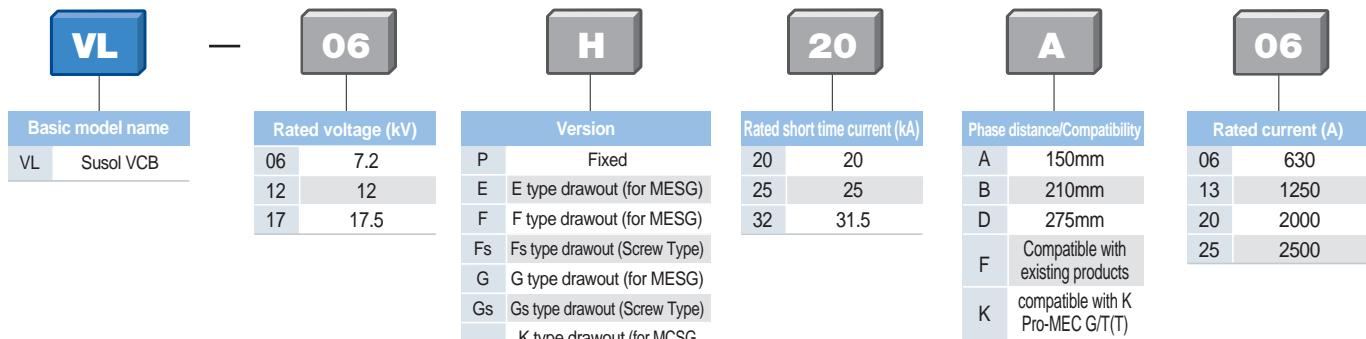

Note) 1. Breaking current 31.5kA: E/F/Fs/G type
can be used only with 7.2kV
2. Gs/K type: Usable only 7.2/12kV
K type Compatible with Pro-MEC G/T(T)
(for withdrawable type for MCSG)

Note) 1. In case of 7.2kV


- 1) Phase distance 150mm only
- 2) 20/25kA: only 630/1250/2000A available (E/F/G)
- 3) 31.5kA: only 1250/2000A available (E/F/G)

2. K type: phase distance 150mm only

3. In case of 12/17.5kV

- 1) H type: phase distance 150/210/275 all available
- 2) P type 630/1250A: phase distance 150/210 all available
- 3) In case of 20/25kA: 12/17.5kV E/F type phase distance 210 available
- 4) K type: compatible with Pro-MEC G/T (phase distance 150mm)
- 5) F type (compatible with existing products): Available only to 20/25kA and 630/1250A (phase distance 210mm)

4. Rated current 2500A: only available 31.5kA P/H type (phase distance 210/275mm)

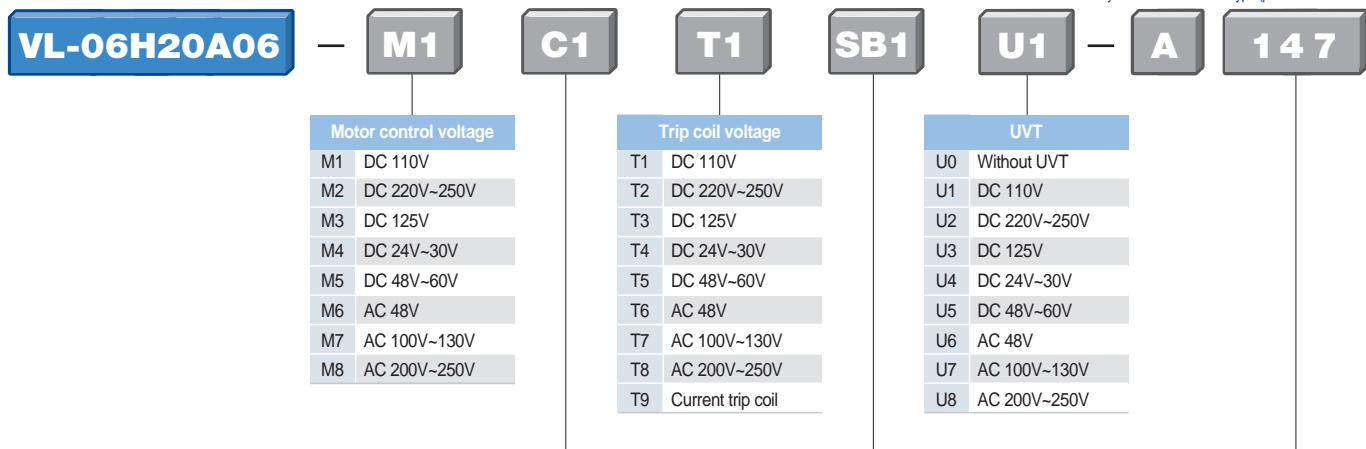


Note)

- | | | |
|---|----|--------------|
| 1. If A2 (UVT), A4 (Position S/W 2a2b) and A7 (Keylock) are selected, A147 is the type name in the ordering. | C3 | DC 125V |
| 2. Unable to select A1(Secondary trip coil), U1-U8(UVT) simultaneously. | C4 | DC 24V~30V |
| 3. A3(Position S/W 1a3b), A4(Position S/W 2a2a), A5(Position S/W 2a2b) can not be selected simultaneously. | C5 | DC 48V~60V |
| 4. A8 (Button Padlock) and A9 (Button Cover) can not be selected simultaneously. | C6 | AC 48V |
| 5. When A1 (Secondary Trip coil) is selected the maximum available auxiliary contacts are 9a9b. | C7 | AC 100V~130V |
| 6. When A2(Secondary trip coil with TCM Contact) is selected the maximum available auxiliary contacts are 4a3b, 9a8b. | C8 | AC 200V~250V |
| 7. AC (Plug interlock), AD (H type Door interlock), AE (MOC) and AF (Locking magnet) are available only for H type. | | |
| 8. In case of B-type connector the flame retardant wire is applicable to auxiliary contacts 4a4b, not to 10a10b. | | |
| 9. A/B-type connector is applicable to P/E/F/G/K type and B-type connector to H type. | | |
| 10. Lead wire special color (blue) is applicable to A-type connector. | | |
| 11. When the position switch is selected from accessories, auxiliary contacts and wiring ass'y can be selected as option A/B-type (P/E/F/G/K-type) or B-type(H-type) connector | | |
| 12. Locking magnet of H type breaker use the same control power supply as motor. | | |
| 13. Flame retardant type blue wire is not available. | | |
| 14. When current Trip Coil AV(CTC 1A) or AW(CTC 5A) is selected, A1(Secondary Trip Coil), U1-U8(UVT) cannot be selected simultaneously and the maximum auxiliary contact is 4a4b. | | |
| 15. All(Mecha Shaft Interlock Lever) is available only for 12kV, P type. | | |

Optional	
CTD1	Condenser Trip Device (AC 110V)
CTD2	Condenser Trip Device (AC 220V)
UDC1	UVT Time Delay Controller (AC/DC 110V)
UDC2	UVT Time Delay Controller (AC/DC 220V)
UDC3	UVT Time Delay Controller (AC/DC 48V)
CTU	Coil Test Unit

Note) A is written only once in case of more than one.

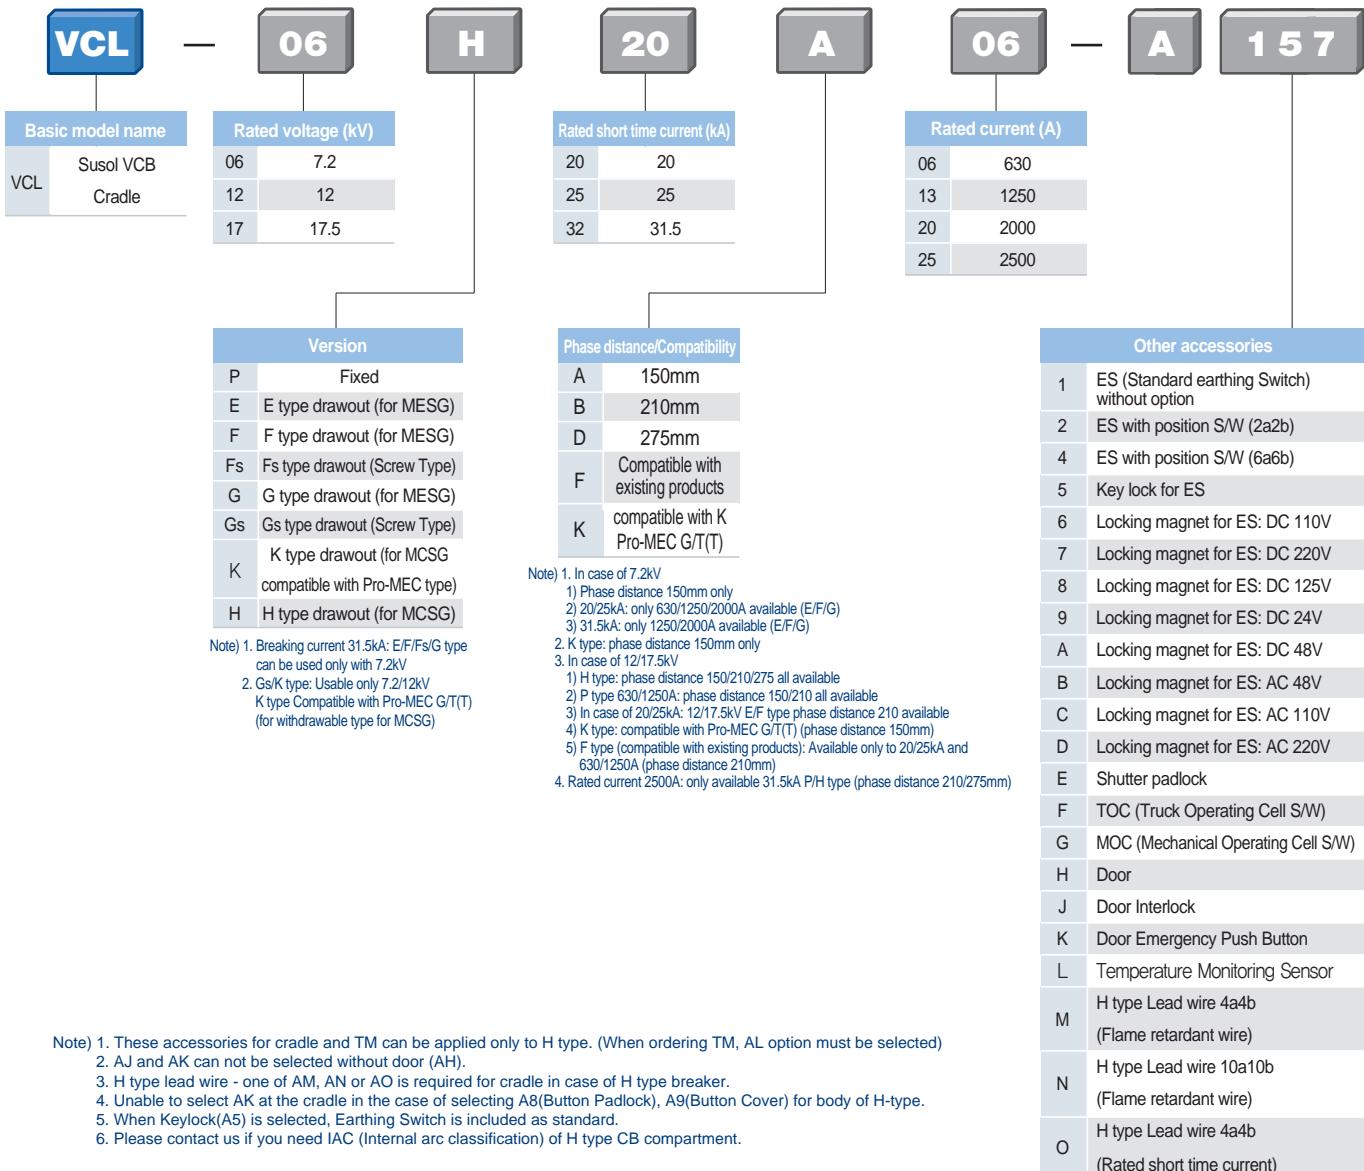Cradle**Optional**

TM Temperature Monitoring

Note) A is written only once in case of more than one.

Types and ordering information

Susol

24/25.8/36kV (VL-20/25/36)

Breaker


VL	—	20	H	13	B	06
Basic model name		Rated voltage (kV)				
VL	Susol VCB	20	P	Fixed	13	12.5
		25	E	E type drawout (for MESG)	16	16
		36	F	F type drawout (for MESG)	25	25
			G	G type drawout (for MESG)		
			K	K type drawout (for MCSG compatible with Pro-MEC type)		
			H	H type drawout (for MCSG)		
Phase distance/Compatibility		Rated current (A)				
		B	210mm	06	630	
		F	265mm	13	1250	
		D	275mm	20	2000	
		G	Enclosed type, Tulip Contact	25	2500	

Note) - P, E, F type : phase distance 265mm only
- G-type: 630A and 1250A – 210mm and 265mm
2000A - phase distance 210mm only
- K-type: 630A and 1250A – , 210mm and 265mm
2000A - phase distance 265mm only
- H-type: All ratings - dual phase distance, 210mm and 275mm dual
(2500A - phase distance 275mm only)
- E, F-type: phase distance and appearance are distinguished with F and G

VL-20H13B06	—	M1	C1	T1	SB1	U1	—	A	147
Motor control voltage		Trip coil voltage							
M1	DC 110V	T1	DC 110V	UVT	U0	Without UVT			
M2	DC 220V~250V	T2	DC 220V~250V	U1	DC 110V				
M3	DC 125V	T3	DC 125V	U2	DC 220V~250V				
M4	DC 24V~30V	T4	DC 24V~30V	U3	DC 125V				
M5	DC 48V~60V	T5	DC 48V~60V	U4	DC 24V~30V				
M6	AC 48V	T6	AC 48V	U5	DC 48V~60V				
M7	AC 100V~130V	T7	AC 100V~130V	U6	AC 48V				
M8	AC 200V~250V	T8	AC 200V~250V	U7	AC 100V~130V				
		T9	Current trip coil	U8	AC 200V~250V				

Closing coil voltage		Connector and wire		Other accessories <small>(Note)</small>	
C1	DC 110V	SA2	A type connector, 4a4b	1	Secondary Trip coil
C2	DC 220V~250V	SA4	A type connector, 10a10b	2	Secondary Trip Coil with TCM Contact
C3	DC 125V	SB2	B type connector, 4a4b	3	Position S/W (Test : 1a1b, Service : 2b)
C4	DC 24V~30V	SB4	B type connector, 10a10b	4	Position S/W (Test : 2a, Service : 2a)
C5	DC 48V~60V	SA6	A type connector, 4a4b	5	Position S/W (Test : 1a1b, Service : 1a1b)
C6	AC 48V	SA8	A type connector, 10a10b	7	Key lock
C7	AC 100V~130V	retardant	B type connector, 4a4b	8	Button Padlock
C8	AC 200V~250V	SB6		9	Button Cover
Optional					
CTD1	Condenser Trip Device (AC 110V)			A	Lead Wire
CTD2	Condenser Trip Device (AC 220V)			B	User Plug (Part)
UDC1	UVT Time Delay Controller (AC/DC 110V)			C	Plug Interlock
UDC2	UVT Time Delay Controller (AC/DC 220V)			D	Padlock (H type Door Interlock)
UDC3	UVT Time Delay Controller (AC/DC 48V)			E	MOC (Mechanical Operating Cell S/W)
CTU	Coil Test Unit			F	Locking Magnet
				J	Door Interlock
				O	Lead Wire special color (Blue)
				V	CT operated coil 1A
				W	CT operated coil 5A

Note) A is written only once in case of more than one.

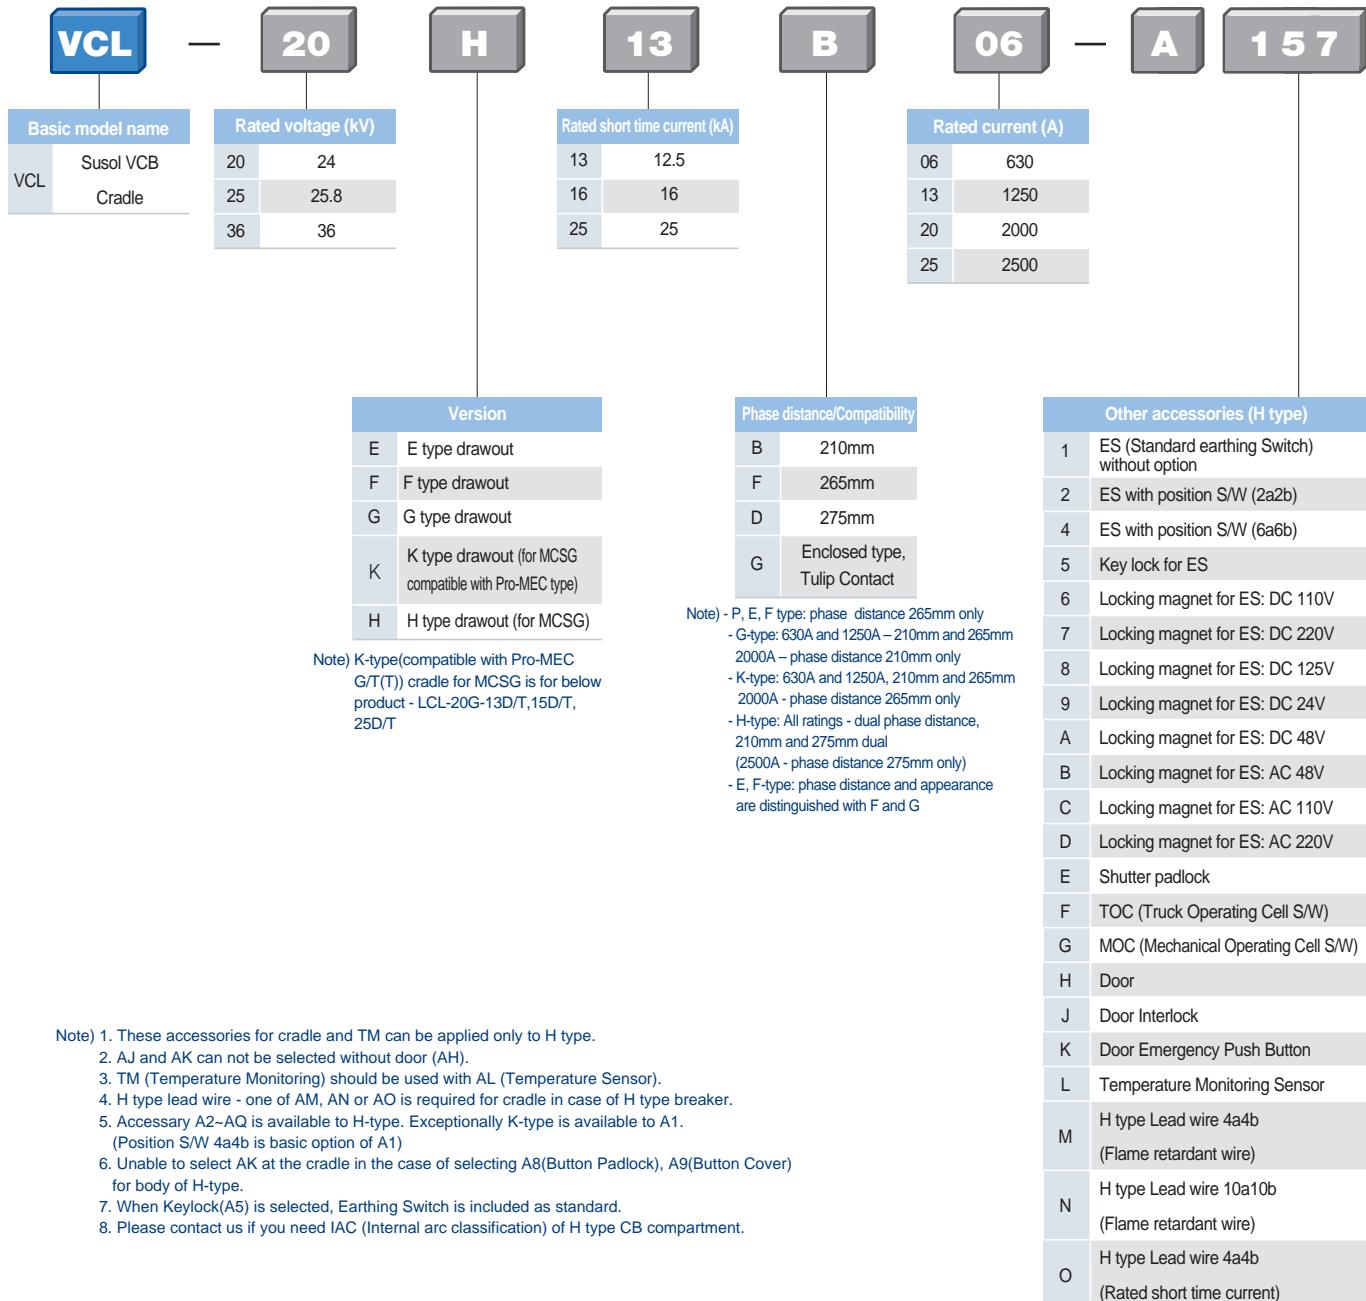Cradle

- Note) 1. These accessories for cradle and TM can be applied only to H type.
 2. AJ and AK can not be selected without door (AH).
 3. TM (Temperature Monitoring) should be used with AL (Temperature Sensor).
 4. H type lead wire - one of AM, AN or AO is required for cradle in case of H type breaker.
 5. Accessory A2-AQ is available to H-type. Exceptionally K-type is available to A1. (Position S/W 4a4b is basic option of A1)
 6. Unable to select AK at the cradle in the case of selecting A8(Button Padlock), A9(Button Cover) for body of H-type.
 7. When Keylock(A5) is selected, Earthing Switch is included as standard.
 8. Please contact us if you need IAC (Internal arc classification) of H type CB compartment.

Optional

TM Temperature Monitoring


Note) A is written only once in case of more than one.


Types and ordering information

Susol

7.2/12kV (LVB-06/12)

Breaker

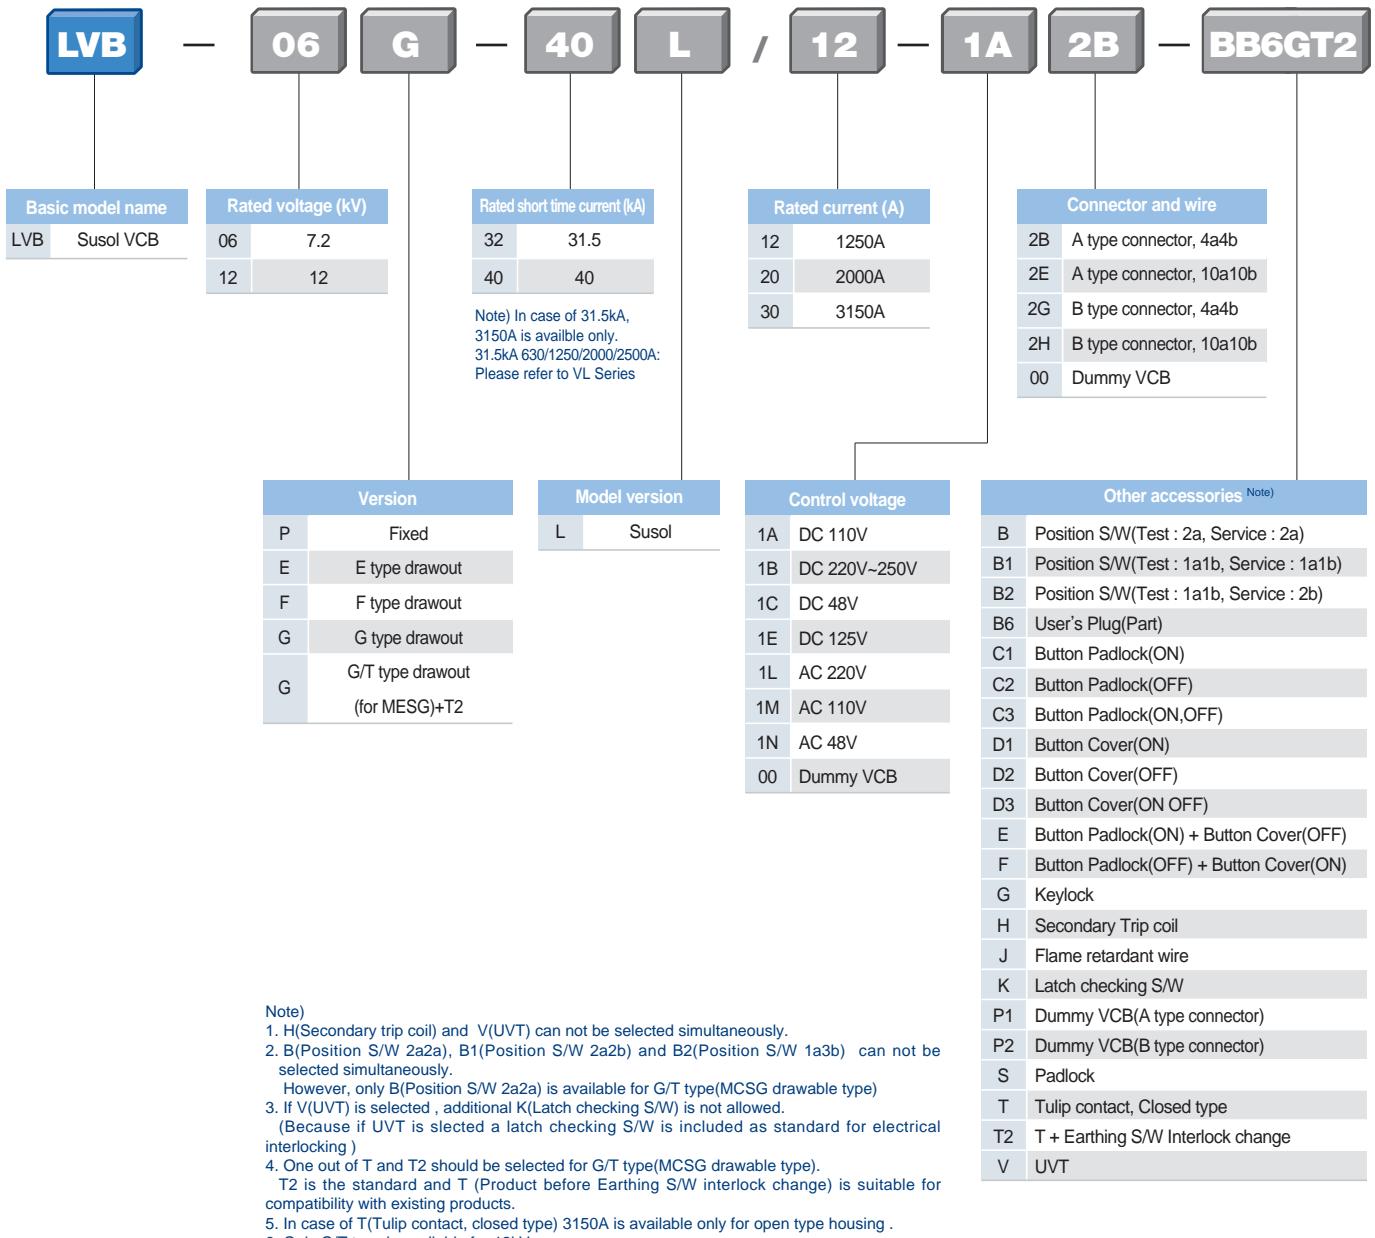

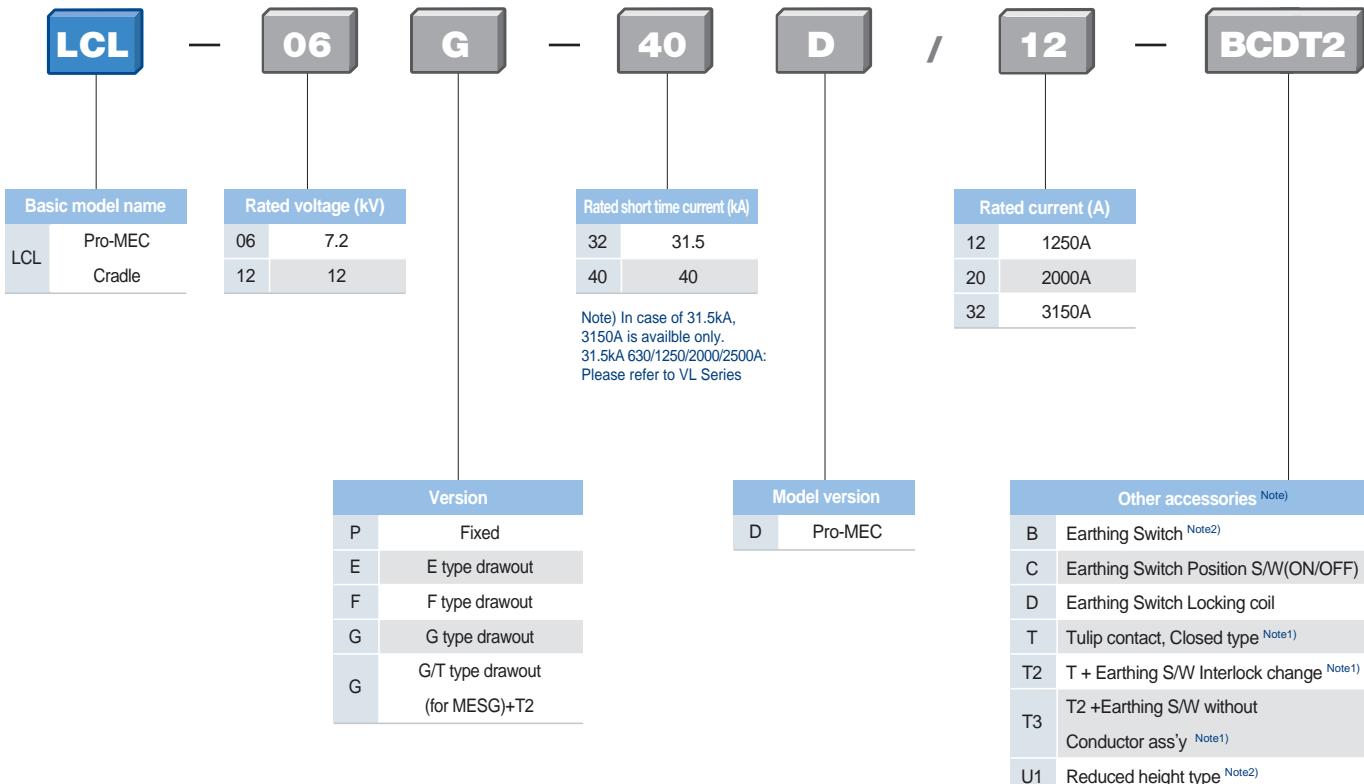Cradle



Note) 1. One out of T, T2 and T3 should be selected for G/T type(MCSG drawable type).
 T2 is the standard and T (Product before Earthing S/W interlock change) is suitable for compatibility with existing products.
 T3 is available only for 1250/2000A.
 2. U1(Reduced height type) and B(Earthing S/W) can not be selected simultaneously.

Types and ordering information

Susol

7.2/12/17.5/24/25.8/36kV (VH-06/12/17/20/25/36)

Breaker

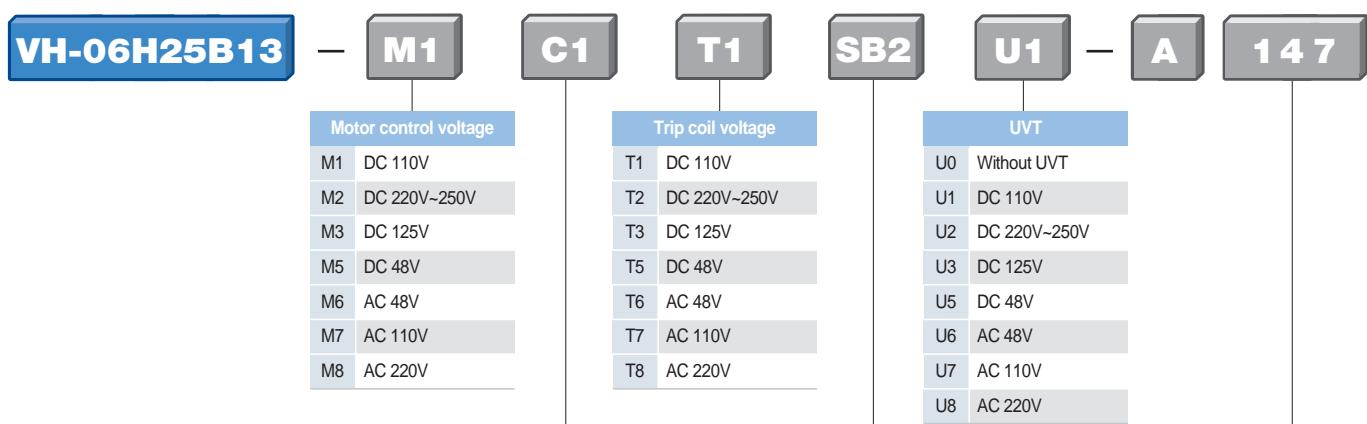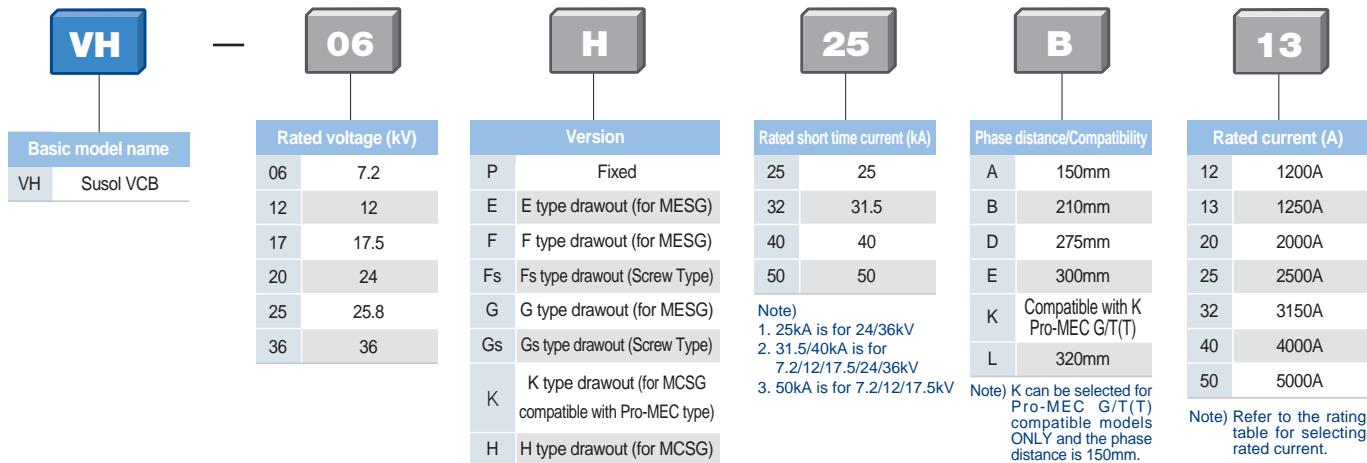

Note

- | | |
|---|------------|
| Note) | |
| 1. If A1(Secondary trip coil), A4(Position S/W 2a2a), A7(Keylock)are selected, A147 is the type name in the ordering. | C3 DC 125V |
| 2. A1(Secondary trip coil), U1~U8(UVT) can not be selected simultaneously. | C5 DC 48V |
| 3. A3(Position S/W 1a3b), A4(Position S/W 2a2a), A5(Position S/W 2a2b) can not be selected simultaneously. | C6 AC 48V |
| 4. A8 (Button Padlock) and A9 (Button Cover) can not be selected simultaneously. | C7 AC 110V |
| 5. AC (Plug interlock), AD (H type Door interlock), AE (MOC) and AF (Locking magnet) are available only for H type. | C8 AC 220V |
| 6. In case of B-type connector the flame retardant wire is applicable to auxiliary contacts 4a4b, not to 10a10b. | |
| 7. A/B-type connector is applicable to P/E/F/G/K type and B-type connector to H type. | |
| 8. Lead Wire Special Color(blue) is available only for A type connector and the flame retardant is not applicable to it. | |
| 9. Locking magnet can be applied only to H type VCB - breaker and cradle. | |
| 10. Locking magnet of H type breaker use the same control power supply as motor. | |
| 11. In case of selecting UVT A6 (Latch checking S/W) is not allowed. A6 (Latch checking S/W) is installed by default to make electrical interlock with UVT. | |
| 12. Lead wire is enclosed in the breaker in case of ordering fixed type or H type breaker without cradle, installed of cradle in case of ordering the breaker with cradle. If user plug is selected it will be enclosed in the breaker. | |
| 13. When A1(Secondary trip coil) is selected the maximum available auxiliary contacts are 10a10b. | |
| 14. When A2(Secondary Trip coil with TCM Contact) is selected the maximum available auxiliary contacts are 4a3b, 10a9b | |

Closing coil voltage		Connector and wire		Other accessories	
C1	DC 110V	Standard	SA2	A type connector, 4a4b	1 Secondary Trip coil
C2	DC 220V~250V		SA4	A type connector, 10a10b	2 Secondary Trip Coil with TCM Contact
C3	DC 125V		SB2	B type connector, 4a4b	3 Position S/W(Test: 1a1b, Service: 2b)
C5	DC 48V		SB4	B type connector, 10a10b	4 Position S/W(Test: 2a, Service: 2a)
C6	AC 48V		SA6	A type connector, 4a4b	5 Position S/W(Test: 1a1b, Service: 1a1b)
C7	AC 110V		SA8	A type connector, 10a10b	6 Latch checking S/W
C8	AC 220V		SB6	B type connector, 4a4b	7 Keylock

Optional	
CTD1	Condenser Trip Device(AC 110V)
CTD2	Condenser Trip Device(AC 220V)
UDC1	UVT Time Delay Controller(AC/DC 110V)
UDC2	UVT Time Delay Controller(AC/DC 220V)
UDC3	UVT Time Delay Controller(AC/DC 48V)
CTU	Coil Test Unit

Note) A is written only once in case of

Cradle

VCH	—	06	H	25	B	13	—	A	157
Basic model name									
Susol VCB Cradle									
Rated voltage (kV)									
06 7.2									
12 12									
17 17.5									
20 24									
25 25.8									
36 36									
Rated short time current (kA)									
25 25									
32 31.5									
40 40									
50 50									
Rated current (A)									
12 1200A									
13 1250A									
20 2000A									
25 2500A									
32 3150A									
40 4000A									
50 5000A									

Version	
P	Fixed
E	E type drawout (for MESG)
F	F type drawout (for MESG)
Fs	Fs type drawout (Screw Type)
G	G type drawout (for MESG)
Gs	Gs type drawout (Screw Type)
K	K type drawout (for MCSG compatible with Pro-MEC type)
H	H type drawout (for MCSG)
Ha	MCSG Cradle type
Hb	MCSG drawout + PT lower chamber

Phase distance/Compatibility	
A	150mm
B	210mm
D	275mm
E	300mm
J	Rotated bushing type (210mm)
L	320mm

Other accessories (H type)	
1	ES (Standard earthing Switch) without option
2	ES with Position S/W (2a2b)
4	ES with Position S/W (6a6b)
5	Key lock for ES
6	Locking magnet for ES: DC 110V
7	Locking magnet for ES: DC 220V
8	Locking magnet for ES: DC 125V
A	Locking magnet for ES: DC 48V
B	Locking magnet for ES: AC 48V
C	Locking magnet for ES: AC 110V
D	Locking magnet for ES: AC 220V
E	Shutter padlock
F	TOC (Truck Operating Cell S/W)
G	MOC (Mechanical Operating Cell S/W)
H	Door
J	Door Interlock
K	Door Emergency Push Button
L	Temperature Sensor
M	H type Lead wire 4a4b (Flame retardant wire)
N	H type Lead wire 10a10b (Flame retardant wire)
O	H type Lead wire 4a4b (Rated short time current)
Q	ANSI type Charge interlock
T3	Earthing S/W without conductor ass'y
LC	Earthing S/W Locking coil
U1	Earthing S/W Locking coil

Note) T3, LC, U1 are options for K type cradle ONLY(Compatible with previous Pro-MEC models)

Optional

TM Temperature Monitoring

Note) A is written only once in case of more than one.

Type of circuit breakers

Susol

7.2/12/17.5/24/25.8/36kV (VL-06/12/17/20/25/36)

Ur [kV]	Isc [kA]	Ir[A]					VCB		CRADLE		Connector
		p=130	p=150	p=210	p=265	p=275	Type	Version	Type	Version	
7.2	8	400					VL-06□08A04	P,E,FG	VCL-06□08A04	E,F,G	A
							VL-06□08B04	P,E,FG	VCL-06□08B04	E,F,G	A
	12.5	630					VL-06□13A06	P,E,FG	VCL-06□13A06	E,F,G	A
							VL-06□13B06	P,E,FG	VCL-06□13B06	E,F,G	A
											A
	20	630	630				VL-06□20A(K)06	P,E,F,G,H	VCL-06□20A(K)06	E,F,G,K,H	P,E,F,G,K:A/B, H:B
			1250				VL-06□20A(K)13	P,E,F,G,H	VCL-06□20A(K)13	E,F,G,K,H	P,E,F,G,K:A/B, H:B
			2000				VL-06□20A20	P,E,F,G,H	VCL-06□20A20	E,F,G,H	P,E,F,G,A/B, H:B
	25		630				VL-06□25A(K)06	P,E,F,G,K,H	VCL-06□25A06	E,F,G,K,H	P,E,F,G,K:A/B, H:B
			1250				VL-06□25A(K)13	P,E,F,G,K,H	VCL-06□25A13	E,F,G,K,H	P,E,F,G,K:A/B, H:B
			2000				VL-06□25A(K)20	P,E,F,G,K,H	VCL-06□25A20	E,F,G,K,H	P,E,F,G,K:A/B, H:B
	31.5		630				VL-06□32A06	P,H	VCL-06H32A06	H	B
			1250				VL-06□32A(K)13	P,E,F,Fs,G,Gs,K,H	VCL-06□32A13	E,F,Fs,G,Gs,K,H	P,E,F,Fs,G,Gs,K:A/B,H:B
			2000				VL-06□32A(K)20	P,E,F,Fs,G,Gs,K,H	VCL-06□32A20	E,F,Fs,G,Gs,K,H	P,E,F,Fs,G,Gs,K:A/B,H:B
12	20	630					VL-12□20A(K)06	P,K,H	VCL-12□20A06	K,H	K:A/B, H:B
			1250				VL-12□20A(K)13	P,K,H	VCL-12□20A13	K,H	K:A/B, H:B
			2000				VL-12H20A20	H	VCL-12H20A20	H	B
			630				VL-12□20B06	P,E,F,H	VCL-12□20B06	E,F,H	P,E,F:A/B, H:B
			1250				VL-12□20B13	P,E,F,H	VCL-12□20B13	E,F,H	P,E,F:A/B, H:B
	25		2000				VL-12□20B20	P,E,F,H	VCL-12□20B20	E,F,H	P,E,F:A/B, H:B
			630				VL-12□20F06	E,F	VCL-12□20F06	E,F	A/B
			1250				VL-12□20F13	E,F	VCL-12□20F13	E,F	A/B
			630				VL-12□25A(K)06	P,K,H	VCL-12□25A06	K,H	K:A/B, H:B
			1250				VL-12□25A(K)13	P,K,H	VCL-12□25A13	K,H	K:A/B, H:B
			2000				VL-12□25A(K)20	K,H	VCL-12□25A20	K,H	K:A/B, H:B
			630				VL-12□25B06	P,E,F,H	VCL-12□25B06	E,F,H	P,E,F:A/B, H:B
			1250				VL-12□25B13	P,E,F,H	VCL-12□25B13	E,F,H	P,E,F:A/B, H:B
			2000				VL-12□25B20	P,E,F,H	VCL-12□25B20	E,F,H	P,E,F:A/B, H:B
			630				VL-12□25F06	E,F	VCL-12□25F06	E,F	A/B
	31.5		1250				VL-12□25F13	E,F	VCL-12□25F13	E,F	A/B
			630				VL-12□32A06	P,H	VCL-12H32A06	H	B
			1250				VL-12□32A(K)13	P,Gs,K,H	VCL-12□32A13	Gs,K,H	Gs,K:A/B, H:B
			2000				VL-12□32A(K)20	Gs,K,H	VCL-12□32A20	Gs,K,H	Gs,K:A/B, H:B
			630				VL-12□32B06	P,H	VCL-12H32B06	H	B
			1250				VL-12□32B13	P,H	VCL-12H32B13	H	B
			2000				VL-12□32B20	P,H	VCL-12H32B20	H	B
			2500				VL-12□32B25	P,H	VCL-12H32B25	H	B
		31.5	2500				VL-12□32D25	P,H	VCL-12H32D25	H	B
17.5	20	630					VL-17H20A06	H	VCL-17H20A06	H	B
			1250				VL-17H20A13	H	VCL-17H20A13	H	B
			2000				VL-17H20A20	H	VCL-17H20A20	H	B
			630				VL-17□20B06	P,E,F,H	VCL-17□20B06	E,F,H	P,E,F:A/B, H:B
			1250				VL-17□20B13	P,E,F,H	VCL-17□20B13	E,F,H	P,E,F:A/B, H:B
	25		2000				VL-17□20B20	P,E,F,H	VCL-17□20B20	E,F,H	P,E,F:A/B, H:B
			630				VL-17□20F06	E,F	VCL-17□20F06	E,F	A/B
			1250				VL-17□20F13	E,F	VCL-17□20F13	E,F	A/B
			630				VL-17H25A06	H	VCL-17H25A06	H	B
			1250				VL-17H25A13	H	VCL-17H25A13	H	B
			2000				VL-17H25A20	H	VCL-17H25A20	H	B
			630				VL-17□25B06	P,E,F,H	VCL-17□25B06	E,F,H	P,E,F:A/B, H:B
			1250				VL-17□25B13	P,E,F,H	VCL-17□25B13	E,F,H	P,E,F:A/B, H:B
			2000				VL-17□25B20	P,E,F,H	VCL-17□25B20	E,F,H	P,E,F:A/B, H:B
			630				VL-17□25F06	E,F	VCL-17□25F06	E,F	A/B
		31.5	1250				VL-17□25F13	E,F	VCL-17□25F13	E,F	A/B
			630				VL-17□32A06	P,H	VCL-17H32A06	H	B
			1250				VL-17□32A13	P,H	VCL-17H32A13	H	B
			2000				VL-17□32A20	H	VCL-17H32A20	H	B
			2500				VL-17□32B06	P,H	VCL-17H32B06	H	B
			1250				VL-17□32B13	P,H	VCL-17H32B13	H	B
			2000				VL-17□32B20	P,H	VCL-17H32B20	H	B
			2500				VL-17□32B25	P,H	VCL-17H32B25	H	B
			2500				VL-17□32D25	P,H	VCL-17H32D25	H	B

Ur [kV]	Isc [kA]	Ir[A]					VCB		CRADLE		Connector
		p=130	p=150	p=210	p=265	p=275	Type	Version	Type	Version	
24	12.5			630		VL-20□13B06	G,K,H	VCL-20□13B06	G,K,H	G,K:A/B, H:B	
				1250		VL-20□13B13	G,K,H	VCL-20□13B13	G,K,H	G,K:A/B, H:B	
					630	VL-20□13F06	P,E,F,G,K	VCL-20□13F06	E,F,G,K	A/B	
					630	VL-20□13G06	E,F	VCL-20□13G06	E,F	A/B	
					1250	VL-20□13F13	P,E,F,G,K	VCL-20□13F13	E,F,G,K	A/B	
					1250	VL-20□13G13	E,F	VCL-20□13G13	E,F	A/B	
					630	VL-20H13D06	H	VCL-20H13D06	H	B	
					1250	VL-20H13D13	H	VCL-20H13D13	H	B	
	16			630		VL-20□16B06	G,K,H	VCL-20□16B06	G,K,H	G,K:A/B, H:B	
				1250		VL-20□16B13	G,K,H	VCL-20□16B13	G,K,H	G,K:A/B, H:B	
					630	VL-20□16F06	P,E,F,G,K	VCL-20□16F06	E,F,G,K	A/B	
					630	VL-20□16G06	E,F	VCL-20□16G06	E,F	A/B	
					1250	VL-20□16F13	P,E,F,G,K	VCL-20□16F13	E,F,G,K	A/B	
					1250	VL-20□16G13	E,F	VCL-20□16G13	E,F	A/B	
					630	VL-20H16D06	H	VCL-20H16D06	H	B	
					1250	VL-20H16D13	H	VCL-20H16D13	H	B	
25.8	25			630		VL-20□25B06	G,K,H	VCL-20□25B06	G,K,H	G,K:A/B, H:B	
				1250		VL-20□25B13	G,K,H	VCL-20□25B13	G,K,H	G,K:A/B, H:B	
				2000		VL-20□25B20	G,H	VCL-20□25B20	G,H	G,A/B, H:B	
					630	VL-20□25F06	P,E,F,G,K	VCL-20□25F06	E,F,G,K	A/B	
					630	VL-20□25G06	E,F	VCL-20□25G06	E,F	A/B	
					1250	VL-20□25F13	P,E,F,G,K	VCL-20□25F13	E,F,G,K	A/B	
					1250	VL-20□25G13	E,F	VCL-20□25G13	E,F	A/B	
					2000	VL-20□25F20	P,E,F,K	VCL-20□25F20	E,F,K	A/B	
					2000	VL-20□25G20	E,F	VCL-20□25G20	E,F	A/B	
	12.5				630	VL-20H25D06	H	VCL-20H25D06	H	B	
					1250	VL-20H25D13	H	VCL-20H25D13	H	B	
					2000	VL-20H25D20	H	VCL-20H25D20	H	B	
					2500	VL-20H25D25	H	VCL-20H25D25-AS	H	B	
					630	VL-25□13B06	G,K,H	VCL-25□13B06	G,K,H	G,K:A/B, H:B	
					1250	VL-25□13B13	G,K,H	VCL-25□13B13	G,K,H	G,K:A/B, H:B	
					630	VL-25□13F06	P,E,F,G,K	VCL-25□13F06	E,F,G,K	A/B	
					630	VL-25□13G06	E,F	VCL-25□13G06	E,F	A/B	
36	16				1250	VL-25□13F13	P,E,F,G,K	VCL-25□13F13	E,F,G,K	A/B	
					1250	VL-25□13G13	E,F	VCL-25□13G13	E,F	A/B	
					630	VL-25H13D06	H	VCL-25H13D06	H	B	
					1250	VL-25H13D13	H	VCL-25H13D13	H	B	
					630	VL-25□16B06	G,K,H	VCL-25□16B06	G,K,H	G,K:A/B, H:B	
					1250	VL-25□16B13	G,K,H	VCL-25□16B13	G,K,H	G,K:A/B, H:B	
					630	VL-25□16F06	P,E,F,G,K	VCL-25□16F06	E,F,G,K	A/B	
					630	VL-25□16G06	E,F	VCL-25□16G06	E,F	A/B	
	25				1250	VL-25□16F13	P,E,F,G,K	VCL-25□16F13	E,F,G,K	A/B	
					1250	VL-25□16G13	E,F	VCL-25□16G13	E,F	A/B	
					630	VL-25H16D06	H	VCL-25H16D06	H	B	
					1250	VL-25H16D13	H	VCL-25H16D13	H	B	
					630	VL-25□25B06	G,K,H	VCL-25□25B06	G,K,H	G,K:A/B, H:B	
					1250	VL-25□25B13	G,K,H	VCL-25□25B13	G,K,H	G,K:A/B, H:B	
					2000	VL-25□25B20	G,H	VCL-25□25B20	G,H	G,A/B, H:B	
					630	VL-25□25F06	P,E,F,G,K	VCL-25□25F06	E,F,G,K	A/B	
					630	VL-25□25G06	E,F	VCL-25□25G06	E,F	A/B	
	25				1250	VL-25□25F13	P,E,F,G,K	VCL-25□25F13	E,F,G,K	A/B	
					1250	VL-25□25G13	E,F	VCL-25□25G13	E,F	A/B	
					2000	VL-25□25F20	P,E,F,K	VCL-25□25F20	E,F,K	A/B	
					2000	VL-25□25G20	E,F	VCL-25□25G20	E,F	A/B	
					630	VL-25H25D06	H	VCL-25H25D06	H	B	
					1250	VL-25H25D13	H	VCL-25H25D13	H	B	
					2000	VL-25H25D20	H	VCL-25H25D20	H	B	
					2500	VL-25H25D25	H	VCL-25H25D25-AS	H	B	
36	25				630	VL-36□25D06	P,H	VCL-36□25D06	H	P:A/B, H:B	
					1250	VL-36□25D13	P,H	VCL-36□25D13	H	P:A/B, H:B	
					2000	VL-36□25D20	P,H	VCL-36□25D20	H	P:A/B, H:B	
					2500	VL-36□25D25	P,H	VCL-36□25D25	H	P:A/B, H:B	

Note) 1. Ur = Rated voltage

2. Isc = Rated short-circuit current

3. Ir = Rated normal current

4. p = Phase distance

5. E,F and G types are cradles for MESG(Metal Enclosed Switchgear) and H type for MCSG(Metal Clad Switchgear)

6. For the partial replacement of 7.2kV 8/12.5kA VCB, in case of using the existing old type cradle and replacing breaker only, please order type B (Compatible with existing breaker). Compatibile busbars are required for fixed version.

To replace VCB fully(breaker and cradle) please order type A for breaker and compatible cradle B.

Type of circuit breakers

Susol

7.2/12/17.5/24/25.8/36kV (VH-06/12/17/20/25/36)

Ur [kV]	Isc [kA]	Ir[A]				VCB		CRADLE		Connector	
		p=150	p=210	p=254	p=275	p=320	Type	Version	Type		
7.2	31.5	1250					LVB-06□-32L/12	P,E,F,G,G/T	LCL-06□-32D/12	E,F,G,G/T	A/B
		2000					LVB-06□-32L/20	P,E,F,G,G/T	LCL-06□-32D/20	E,F,G,G/T	A/B
			3150				VH-06□32B32	Fs,Gs,K,H	VCH-06□32B32	Fs,Gs,K,H	K:A/B, Fs,Gs,H:B
							LVB-06□-32L/30	P,E,F,G/T	LCL-06□-32D/30	E,F,G,G/T	
	40	1250	1250				VH-06□40A13	P,E,F,Fs,G,Gs,K,H	VCH-06□40A13	E,F,Fs,G,Gs,K,H	P,E,F,Fs,G, Gs,K:A/B,H:B
							LVB-06□-40L/12	P,E,F,G,G/T	LCL-06□-40D/12	E,F,G,G/T	
		2000	2000				VH-06□40A20	P,E,F,Fs,G,Gs,K,H	VCH-06□40A20	E,F,Fs,G,Gs,K,H	P,E,F,Fs,G, Gs,K:A/B,H:B
			3150				LVB-06□-40L/20	P,E,F,G,G/T	LCL-06□-40D/20	E,F,G,G/T	
							VH-06□40B32	Fs,Gs,K,H	VCH-06□40B32	Fs,Gs,K,H	K:A/B, Fs,Gs,H:B
				3150			LVB-06□-40L/30	P,E,F,G/T	LCL-06□-40D/30	E,F,G,G/T	
	50				3150		VH-06□40D32	K,H	VCH-06□40D32	K,H	K:A/B,H:B
					4000		VH-06□40D40	P,K,H	VCH-06□40D40	K,Ha,Hb	B
						5000	VH-06H40L50	H	VCH-06Ha40L50	Ha	B
							VH-06□50B13	P,H	VCH-06H50B13	H	B
							VH-06□50B20	P,H	VCH-06H50B20	H	B
							VH-06□50D25	P,H	VCH-06H50D25	H	B
12	31.5				3150		VH-06□50D32	P,H	VCH-06H50D32	H	B
							VH-06□50D40	P,K,H	VCH-06□50D40	K,Ha,Hb	B
							VH-06H50L50	H	VCH-06Ha50L50	Ha	B
		1250	1250				LVB-12G-32L/12-T2	G/T	LCL-12G-32D/12-T2	G/T	A/B
	40	2000					LVB-12G-32L/20-T2	G/T	LCL-12G-32D/20-T2	G/T	A/B
			3150				VH-12□32B32	Gs,K,H	VCH-12□32B32	Gs,K,H	K:A/B,Gs,H:B
							LVB-12G-32L/30-T2	G/T	LCL-12G-32D/30-T2	G/T	A/B
		1250	1250				VH-12□40A(K)13	Gs,K,H	VCH-12□40A(K)13	Gs,K,H	Gs,K:A/B,H:B
							LVB-12G-40L/12-T2	G/T	LCL-12G-40D/12-T2	G/T	A/B
		2000	2000				VH-12□40A(K)20	Gs,K,H	VCH-12□40A(K)20	Gs,K,H	K:A/B,Gs,H:B
	50	1250					LVB-12G-40L/20-T2	G/T	LCL-12G-40D/20-T2	G/T	A/B
		2000					VH-12□40B13	K,H	VCH-12□40B13	K,H	B
			3150				VH-12□40B20	K,H	VCH-12□40B20	K,H	B
							VH-12□40B32	Gs,K,H	VCH-12□40B32	Gs,K,H	K:A/B,Gs,H:B
					3150		LVB-12G-40L/30-T2	G/T	LCL-12G-40D/30-T2	G/T	A/B
							VH-12H40D32	H	VCH-12H40D32	H	B
17.5	31.5				3150		VH-12H40D40	P,K,H	VCH-12H40D40	K,Ha,Hb	B
							VH-12H40L50	H	VCH-12Ha40L50	Ha	B
	40	1250					VH-12□50B13	P,H	VCH-12H50B13	H	B
		2000					VH-12□50B20	P,H	VCH-12H50B20	H	B
			2500				VH-12□50D25	P,H	VCH-12H50D25	H	B
							VH-12□50D32	P,H	VCH-12H50D32	H	B
				3150			VH-12□50D40	P,K,H	VCH-12□50D40	K,Ha,Hb	B
							VH-12H50L50	H	VCH-12Ha50L50	Ha	B
	40				3150		VH-17H32B32	H	VCH-17H32B32	H	B
							VH-17H32D32	H	VCH-17H32D32	H	B
				1250			VH-17□40B13	K,H	VCH-17□40B13	K,H	K:A/B,H:B
				2000			VH-17□40B20	K,H	VCH-17□40B20	K,H	K:A/B,H:B
				3150			VH-17H40B32	H	VCH-17H40B32	H	B
					3150		VH-17K40C32	K	VCH-17K40C32	K	A/B
							VH-17H40D32	H	VCH-17H40D32	H	B
							VH-17□40D40	P,K,H	VCH-17□40D40	Ha,Hb	B

Ur [kV]	Isc [kA]	Ir[A]				VCB		CRADLE		Connector
		p=150	p=210	p=275	p=300	Type	Version	Type	Version	
17.5	50	1250				VH-17□50B13	P,H	VCH-17H50B13	H	B
						VH-17□50B20	P,H	VCH-17H50B20	H	B
		2500				VH-17□50D25	P,H	VCH-17H50D25	H	B
						VH-17□50D32	P,H	VCH-17H50D32	H	B
						VH-17□50D40	P,H	VCH-17□50D40	Ha,Hb	B
24	31.5	25		2500		VH-20□25D25	P,H	VCH-20H25D25	H	B
		1250				VH-20□32B13	P,H	VCH-20H32B13	H	B
						VH-20□32B20		VCH-20H32F13	H	B
			2000			VH-20□32B20	P,H	VCH-20H32B20	H	B
		1250				VH-20□32D13	P,H	VCH-20H32D13	H	B
						VH-20□32D20	P,H	VCH-20H32D20	H	B
						VH-20□32D32	P,H	VCH-20H32D32	H	B
			2000			VH-20□40B13	P,H	VCH-20H40B13	H	B
		40	1250			VH-20□40B20		VCH-20H40F13	H	B
			2000			VH-20□40B20	P,H	VCH-20H40B20	H	B
			1250			VH-20□40D13		VCH-20H40F20	H	B
						VH-20□40D20	P,H	VCH-20H40D20	H	B
						VH-20□40D32	P,H	VCH-20H40D32	H	B
25.8	31.5	25		2500		VH-25□25D25	P,H	VCH-25H25D25	H	B
		1250				VH-25□32B13	P,H	VCH-25H32B13	H	B
						VH-25□32B20		VCH-25H32F13	H	B
			2000			VH-25□32B20	P,H	VCH-25H32B20	H	B
		1250				VH-25□32D13	P,H	VCH-25H32D13	H	B
						VH-25□32D20	P,H	VCH-25H32D20	H	B
						VH-25□32D32	P,H	VCH-25H32D32	H	B
			2000			VH-25□40B13	P,H	VCH-25H40B13	H	B
		40	1250			VH-25□40B20		VCH-25H40F13	H	B
			2000			VH-25□40B20	P,H	VCH-25H40B20	H	B
						VH-25□40D13		VCH-25H40F20	H	B
						VH-25□40D20	P,H	VCH-25H40D20	H	B
			3150			VH-25□40D32	P,H	VCH-25H40D32	H	B
36	25	1250			1250	VH-36□25E13	P,H	VCH-36H25E13	H	B
					2000	VH-36□25E20	P,H	VCH-36H25E20	H	B
					3150	VH-36□25E32	P,H	VCH-36H25E32	H	B
		31.5			1250	VH-36□32E13	P,H	VCH-36H32E13	H	B
					2000	VH-36□32E20	P,H	VCH-36H32E20	H	B
					3150	VH-36□32E32	P,H	VCH-36H32E32	H	B
					1250	VH-36□40E13	P,H	VCH-36H40E13	H	B
	40				2000	VH-36□40E20	P,H	VCH-36H40E20	H	B
					3150	VH-36□40E32	P,H	VCH-36H40E32	H	B

Note) 1. Ur = Rated voltage

2. Isc = Rated short-circuit current

3. Ir = Rated normal current

4. p = Phase distance

5. H type is MCSG style drawable type with a box type cradle for CB compartment construction.

6. G/T types are MCSG style drawable types with a cradle for building in the switchgear , not a box type. (K of VCL type name indicates 4000A)

Example of G/T type : LVB-06G-32L/12-T2, LCL-06G-32D/12-T2

7. G/T types use LVB and LCL names.

8. E, F and G types provide cradles for MESG(Metal Enclosed Switchgear) and H, G/T types for MCSG(Metal Clad Switchgear).

9. In case of 7.2/12kV, 31.5kA/40kA H type: Please contact us.

Ratings - 7.2kV 8/12.5kA 400/630A

Susol

VL-06



Item		VL-06□08□04	VL-06□13□06
Rated voltage	Ur (kV)	7.2	
Rated normal current	Ir (A)	400	630
Rated frequency	fr (Hz)		50/60
Rated short-circuit current	Isc (kA)	8	12.5
Rated short-time withstand current	Ik/tk (kA/s)	8/3	12.5/3
Rated short-circuit breaking capacity	(MVA)	100	160
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)	
Rated breaking time	(cycle)	3	
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	20 60
Rated operating sequence		O-0.3s-CO-15s-CO	
Control voltage	Closing coil Trip coil	(V)	AC/DC 100~130, AC/DC 200~250, DC 125, DC 24~30, DC 48~60, AC 48 AC/DC 100~130, AC/DC 200~250, DC 125, DC 24~30, DC 48~60, AC 48
Auxiliary contacts			2a2b, 4a4b, 6a6b
Rated opening time		(sec)	≤ 0.04
No-load closing time		(sec)	≤ 0.06
Type test class	Mechanical Electrical Capacitive current switching		M2 E2 (List1) C2
Installation version	Fixed Drawout		P type E, F, G type (for MESG)
Phase distance		(mm)	130
Weight	Breaker (E, F, G type) Cradle (E, F, G type)	(kg)	37 18, 25, 32
Dimensions	Breaker (E, F, G type) Cradle (E, F, G type)		Page 97~98 Page 98~99
Standards			IEC 62271-100, JEC 2300/JIS C 4603, V-check (KESCO)

Ratings - 7.2/12/17.5kV 20/25kA 630/1250/2000A

Susol

VL-06/12/17



Item		VL-06□20/25□06/13/20			VL-12□20/25□06/13/20			VL-17□20/25□06/13/20										
Rated voltage	Ur (kV)	7.2			12			17.5										
Rated normal current	Ir (A)	630	1250	2000	630	1250	2000	630	1250	2000								
Rated frequency	fr (Hz)	50/60																
Rated short-circuit current	Isc (kA)	20, 25																
Rated short-time withstand current	I _{k/tk} (kA/s)	20/3, 25/3																
Rated short-circuit breaking capacity	(MVA)	250/310			410/520			600/750										
Rated short-circuit making current	I _p (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)																
Rated breaking time	(cycle)	3																
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	20 60	28 75	20 75	28 95	38 95	38 95	38 95	38 95								
Rated operating sequence	O-0.3s-CO-15s-CO																	
Control voltage	Closing coil Trip coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250			DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250												
Auxiliary contacts	4a4b, 10a10b																	
Rated opening time	(sec)	≤ 0.04																
No-load closing time	(sec)	≤ 0.06																
Type test class	Mechanical Electrical Capacitive current switching	M2 E2 (List3) C2																
Installation version *	Fixed Drawout	P type			E, F, G type (for MESG), H type (for MCSG)			E, F type (for MESG), H type (for MCSG)										
Phase distance **	(mm)	150			150 (210)			150 (210)										
Weight	Breaker (E, F, G, K type) Cradle (E, F, G, K type)	(kg)	100 170	100 170	130 180	115 (120) 170 (200)	115 (120) 170 (200)	130 (140) 180 (200)	115 (120) 170 (200)	115 (120) 170 (200)	130 (140) 180 (200)							
Dimensions	Breaker (P, E, F, G, K, H type) Cradle (E, F, G, K type) Cradle (K, H type)	Page 100~111			Page 100~111			Page 100~111										
Standards	IEC 62271-100, KERI/KEMA, V-check (KESCO)																	

* H type is a box type cradle with CB compartment style structure.

** () displays option of phase distance.

Ratings - 7.2/12/17.5kV 31.5kA 630/1250/2000/2500A

Susol

VL-06/12/17



Item		VL-06□32□06/13/20			VL-12□32□06/13/20/25				VL-17□32□06/13/20/25														
Rated voltage		Ur (kV)			7.2				12														
Rated normal current		Ir (A)		630	1250	2000	630	1250	2000	2500	630	1250	2000										
Rated frequency		fr (Hz)				50/60																	
Rated short-circuit current		Isc (kA)				31.5																	
Rated short-time withstand current		Ik/tk (kA/s)				31.5/3 (4 ^{Note1)})																	
Rated short-circuit breaking capacity		(MVA)		393		655				955													
Rated short-circuit making current		Ip (kA)		2.5×Isc (50Hz)/2.6×Isc (60Hz)																			
Rated breaking time		(cycle)		3																			
Rated withstand voltage	Power frequency (1 min)		Ud (kV)		20		28		38														
	Impulse (1.2×50μs)		Up (kV)		60		75		95														
Rated operating sequence		O-0.3s-CO-15s-CO																					
Control voltage	Closing coil		(V)		DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250																		
	Trip coil		(V)		DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250																		
Auxiliary contacts		4a4b, 10a10b																					
Rated opening time		(sec)		≤ 0.04																			
No-load closing time		(sec)		≤ 0.06																			
Type test class	Mechanical		M2																				
	Electrical		E2 (List 3)																				
	Capacitive current switching		C2																				
Installation version *	Fixed		P type																				
	Drawout		H type (for MCGS)	E, F, Fs, G, Gs, K type (for MESG) H type (for MCGS)	H type (for MCGS)	Gs, K type (for MESG) H type (for MCGS)	H type (for MCGS)	Gs, K type (for MESG) H type (for MCGS)	H type (for MCGS)	H type (for MCGS)													
Phase distance **		(mm)		150		150 (210)		210 (275)		150 (210)		210 (275)											
Weight	Breaker (H type)		(kg)	100	100	130	115/120	115/120	130/140	160/175	115/120	115/120	130/140	165/175									
	Cradle (H type)		(kg)	170	170	200	170/200	170/200	170/200	260/290	170/200	170/200	170/200	260/290									
	Breaker (P, E, F, G, K type)		(kg)	85	85	100	85/100	85/100	100/115	120/135	85/100	85/100	100/115	120/135									
Dimensions	Breaker (P, E, F, Fs, G, Gs, K, H type)		Page 112~128				Page 129~161																
	Cradle (E, F, Fs, G, Gs, K, H type)		Page 112~128				Page 129~161																
Standards		IEC 62271-100, KERI, V-check (KESCO)																					

* H type is a box type cradle with CB compartment style structure.

** () displays option of phase distance.

Note1) For Icw 4s, please contact us.

Ratings - 24/25.8kV 12.5/16/25kA 630/1250/2000/2500A

Susol

VL-20/25



Item		VL-20,25□13□06/13		VL-20,25□16□06/13		VL-20,25□25□06/13/20/25									
Rated voltage	Ur (kV)	24/25.8													
Rated normal current	Ir (A)	630	1250	630	1250	630	1250	2000	2500						
Rated frequency	fr (Hz)	50/60 <small>Note1)</small>													
Rated short-circuit current	Isc (kA)	12.5		16		25									
Rated short-time withstand current	Ik/tk (kA/s)	12.5/3 <small>Note2)</small>		16/3 <small>Note2)</small>		25/3 <small>Note2)</small>									
Rated short-circuit breaking capacity	(MVA)	520/560		665/715		1040/1120									
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)													
Rated breaking time	(cycle)	3													
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	50/60				125								
Rated operating sequence	O-0.3s-CO-15s-CO														
Control voltage	Closing coil Trip coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250												
Auxiliary contacts	4a4b, 10a10b														
Rated opening time	(sec)	≤ 0.04													
No-load closing time	(sec)	≤ 0.06													
Type test class	Mechanical Electrical Capacitive current switching	M2 E2 (List 3) C2													
Installation version *	Fixed Drawout	P type E,F,G type (for MESG) / K, H type (for MCSG)							H type (for MCSG)						
Phase distance **	(mm)	210/265/275							275						
Weight	Breaker (H type) Cradle (H type) Breaker (P, E, F, G, K type)	(kg) (kg) (kg)	120 (130)	200 (220)	110 115	130 (140) 200 (220) 120	150 (160) 200 (220) 135	-							
Dimensions	Breaker (P, E, F, G, K, H type) Cradle (E, F, G, K type) Cradle (H type)	Page 162~171		Page 172~178		Page 178~182									
		Page 183~185		Page 183~185		Page 183~185									
		Page 186~190		Page 186~190		Page 186~190									
Standards	IEC 62271-100, KERI, V-check (KESCO)														

* H type is a box type cradle with CB compartment style structure.

** () displays option of phase distance.

Note1) 24/25.8kV 25kA 2000A(Phase distance 210mm): 60Hz available only

2) For low 4s, please contact us.

Ratings - 36kV 25kA 630/1250/2000/2500A

Susol

VL-36



Item	VL-36□25□06	VL-36□25□13	VL-36□25□20	VL-36□25□25
Rated voltage	Ur (kV)		36	
Rated normal current	Ir (A)	630	1250	2000
Rated frequency	fr (Hz)		50/60	
Rated short-circuit current	Isc (kA)		25	
Rated short-time withstand current	Ik/tk (kA/s)		25/3(4 ^{Note1)})	
Rated short-circuit breaking capacity	(MVA)		1560	
Rated short-circuit making current	Ip (kA)		62.5/65	
Rated breaking time	(Cycle)		3	
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	70 170	
Rated operating sequence			O-0.3s-CO-15s-CO	
Control voltage	Closing coil Trip coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220, AC 48, AC 100~130, AC 220~250 DC 24~30, DC 48~60, DC 110, DC 125, DC 220, AC 48, AC 100~130, AC 220~250	
Auxiliary contacts			4a4b, 10a10b	
Rated opening time		(sec)	≤ 0.04	
No-load closing time		(sec)	≤ 0.07	
Type test class	Mechanical Electrical Capacitive current switching		M2 E2 (List 3) C2	
Installation version	Fixed Drawout		P type H type (for MCGS)	
Phase distance	(mm)		275	
Weight	Breaker (H type) Cradle (H type)	(kg)	260 440	260 440
Dimensions	Breaker (H type) Cradle (H type)		Page 191~196 Page 191~196	
Standards			IEC 62271-100	

Note1) For Icw 4s, please contact us.

Ratings - 7.2/12kV 31.5/40kA 1250/2000/3150A

Susol

LVB-06/12



Item	LVB-06□-32□32	LVB-06□-40□12, 20, 32			LVB-12□-32□32	LVB-12□-40□12, 20, 32			
Rated voltage	Ur (kV)	7.2	7.2			12	12		
Rated normal current	Ir (A)	3150 *	1250	2000	3150 *	3150 *	1250	2000	3150 *
Rated frequency	fr (Hz)		50/60						
Rated short-circuit current	Isc (kA)	31.5	40			31.5	40		
Rated short-time withstand current	Ik/tk (kA/s)	31.5/3	40/3			31.5/3	40/3		
Rated short-circuit breaking capacity	(MVA)	393	499			655	831		
Rated short-circuit making current	Ip (kA)		2.5×Isc (50Hz)/2.6×Isc (60Hz)						
Rated breaking time	(Cycle)		3						
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20				28		
	Impulse (1.2×50μs)	Up (kV)	60				75		
Rated operating sequence			O-0.3s-CO-3min-CO						
Control voltage	Closing coil (V)		DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220						
	Trip coil (V)		DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220						
Auxiliary contacts			4a4b, 10a10b						
Rated opening time	(sec)		≤ 0.04						
No-load closing time	(sec)		≤ 0.06						
Type test class	Mechanical		M2						
	Electrical		E2 (List1)						
	Capacitive current switching		C2						
Installation version	Fixed	P type				-			
	Drawout *	E,F,G type (for MESG), MCSG Cradle				MCSG Cradle			
Phase distance	(mm)	210	150		210	210	150		210
Weight	Breaker (MESG, MCSG) (kg)	210, 220	135, 160	135, 160	210, 220	220	164	165	220
	Cradle (MESG, MCSG) (kg)	135, 155	55, 110	63, 117	135, 155	155	110	117	155
Dimensions	Breaker (MESG, MCSG)	Page 201~202			Page 201~202	Page 197~198			Page 201~202
	Cradle (MESG, MCSG)	Page 203~204			Page 203~204	Page 199~200			Page 203~205
Standards	IEC 62271-100, KERI/KEMA, V-check(KESCO)								

* MCSG style drawable type provide a cradle for building in the switchgear, not a box type for CB compartment. Ordering type is LVB.

Note 1) H type that is a box type cradle for enabling a CB compartment in MCSG is under development. Consult us for ordering.

2) Some LVB is the ordering name of the switchboard for export

Ratings - 7.2/12/17.5kV 40kA 1250/2000A

Susol

VH-06/12/17



Item		VH-06/12□40□13/20				VH-06/12/17□40□13/20														
Rated voltage		Ur (kV)		7.2		12		7.2												
Rated normal current	Ir (A)	1250	2000	1250	2000	1250	2000	1250	2000											
Rated frequency	fr (Hz)	50/60																		
Rated short-circuit current	Isc (kA)	40																		
Rated short-time withstand current	Ik/tk (kA/s)	40/4																		
Rated short-circuit breaking capacity	(MVA)	499		831		499		831	1212											
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)																		
Rated breaking time	(cycle)	3																		
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20	28 (42)	20	28 (42)	38													
	Impulse (1.2×50μs)	Up (kV)	60	75	60	75	95													
Rated operating sequence		O-0.3s-CO-3min-CO				O-0.3s-CO-15s-CO														
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220																	
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220																	
Auxiliary contacts		4a4b, 10a10b																		
Rated opening time		≤ 0.04																		
No-load closing time		≤ 0.06																		
Type test class	Mechanical	M2																		
	Electrical	E2 (List 3)																		
	Capacitive current switching	C2																		
Installation version	Drawout	Fs, Gs, K, H type				K, H type														
Phase distance		(mm)				150														
Weight	Breaker (H type)	(kg)	165				215													
	Cradle (H type)	(kg)	205				226													
Dimensions	Breaker (Fs, Gs, K, H type)		Page 208~223				Page 208~223													
	Cradle (Fs, Gs, K, H type)		Page 208~223				Page 208~223													
Standards		IEC 62271-100																		

Ratings - 7.2/12/17.5kV 31.5/40kA 3150A

Susol

VH-06/12/17



Item		VH-06/12/17□32/40□32						
Rated voltage	Ur (kV)	7.2	12	17.5				
Rated normal current	Ir (A)		3150					
Rated frequency	fr (Hz)		50/60					
Rated short-circuit current	Isc (kA)		31.5/40					
Rated short-time withstand current	Ik/tk (kA/s)		40/4					
Rated short-circuit breaking capacity	(MVA)	393/499	655/831	955/1212				
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)						
Rated breaking time	(cycle)		3					
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20	28 (42)	38			
	Impulse (1.2×50μs)	Up (kV)	60	75	95			
Rated operating sequence		O-0.3s-CO-15s-CO						
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220					
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220					
Auxiliary contacts		4a4b, 10a10b						
Rated opening time		≤ 0.04						
No-load closing time		≤ 0.06						
Type test class	Mechanical		M2					
	Electrical		E2 (List 3)					
	Capacitive current switching		C2					
Installation version	Drawout	Fs, Gs, K, H type	Gs, K, H type	K, H type	K type	H type		
Phase distance		(mm)	210	210	210	254	275	
Weight	Breaker (H type)	(kg)	240	240	240	280	280	
	Cradle (H type)	(kg)	235	235	235	250	250	
Dimensions	Breaker (Fs, Gs, K, H type)		Page 208~223					
	Cradle (Fs, Gs, K, H type)		Page 208~223					
Standards		IEC 62271-100						

Ratings - 7.2/12/17.5kV 50kA 1250/2000/2500/3150A

Susol

VH-06/12/17



Item		VH-06□50□13/20/25/32				VH-12□50□13/20/25/32				VH-17□50□13/20/25/32														
Rated voltage		Ur (kV)				7.2				12														
Rated normal current	Ir (A)	1250	2000	2500	3150	1250	2000	2500	3150	1250	2000	2500	3150											
Rated frequency	fr (Hz)					50/60																		
Rated short-circuit current	Isc (kA)					50																		
Rated short-time withstand current	Ik/tk (kA/s)					50/3																		
Rated short-circuit breaking capacity	(MVA)	623				1039				1515														
Rated short-circuit making current	Ip (kA)					2.5×Isc (50Hz)/2.6×Isc (60Hz)																		
Rated breaking time	(cycle)					3																		
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20			28 (42) <small>Note1)</small>				38														
	Impulse (1.2×50μs)	Up (kV)	60			75 (82) <small>Note1)</small>				95														
Rated operating sequence		O-0.3s-CO-15s-CO / O-0.3s-CO-3min-CO																						
Control voltage	Closing coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220																					
	Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220																					
Auxiliary contacts		4a4b, 10a10b																						
Rated opening time		(sec)					≤ 0.04																	
No-load closing time		(sec)					≤ 0.06																	
Type test class	Mechanical	M2																						
	Electrical	E2 (List3)																						
	Capacitive current switching	C2																						
Installation version *	Fixed	P type																						
	Drawout	H type (for MCSG)																						
Phase distance		(mm)	210	275		210	275		210	275														
Weight	Breaker (H type)	(kg)	230	287	290	230	287	290	230	287	290													
	Cradle (H type)	(kg)	175	320	320	175	320	320	175	320	320													
Dimensions	Breaker (H type)	Page 224		Page 226		Page 224	Page 226		Page 224	Page 226														
	Cradle (H type)	Page 225		Page 227		Page 225	Page 227		Page 225	Page 227														
Standards		IEC 62271-100, KERI/KEMA, V-check(KESCO)																						

* H type is a box type cradle with CB compartment style structure.
Note1) Contact us.

Ratings - 7.2/12/17kV 40/50kA 4000A

Susol

VH-06/12/17



Item		VH-06/12/17□40□40			VH-06/12/17□50□40		
Rated voltage	Ur (kV)	7.2	12	17.5	7.2	12	17.5
Rated normal current	Ir (A)			4000			
Rated frequency	fr (Hz)			50/60			
Rated short-circuit current	Isc (kA)		40			50	
Rated short-time withstand current	Ik/tk (kA/s)		40/4			50/4	
Rated short-circuit breaking capacity	(MVA)	499	831	1212	624	1040	1515
Rated short-circuit making current	Ip (kA)		104			130	
Rated breaking time	(cycle)			3			
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20	28(42)	38	20	28(42)
	Impulse (1.2×50μs)	Up (kV)	60	75	95	60	75
Rated operating sequence				O-0.3s-CO-15s-CO			
Control voltage	Closing coil	(V)		DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220			
	Trip coil	(V)		DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220			
Auxiliary contacts				4a4b, 10a10b			
Rated opening time	(sec)			≤ 0.04			
No-load closing time	(sec)			≤ 0.06			
Type test class	Mechanical			M2			
	Electrical			E2 (List3)			
	Capacitive current switching			C2			
Installation version	Fixed	-	-	P type	-	-	P type
	Drawout	H type	H type	H type	H type	H type	H type
Phase distance	(mm)			275			
Weight	Breaker (H type)	(kg)		395			
	Cradle (Ha, Hb type)	(kg)		200			
Dimensions	Breaker (P, H type)			Page 228~233			
	Cradle (Ha, Hb type)			Page 228~233			
Standards				IEC 62271-100			

Ratings - 7.2/12kV 40/50kA 5000A

Susol

VH-06/12



Item		VH-06H40,50L50	VH-12H40,50L50	
Rated voltage	Ur (kV)	7.2	12	
Rated normal current	Ir (A)		5000	
Rated frequency	fr (Hz)		50/60	
Rated short-circuit current	Isc (kA)		40/50	
Rated short-time withstand current	Ik /tk (kA/s)		50/4	
Rated short-circuit breaking capacity	(MVA)	624	1040	
Rated short-circuit making current	Ip (kA)		130	
Rated breaking time	(Cycle)		3	
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	20 60	20 75
Rated operating sequence			O-0.3s-CO-15s-CO	
Control voltage	Closing coil Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220~250 DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220~250	
Auxiliary contacts			4a4b, 10a10b	
Rated opening time		(sec)	≤ 0.04	
No-load closing time		(sec)	≤ 0.06	
Type test class	Mechanical Electrical Capacitive current switching		M2 E2 (List 3) C2	
Installation version	Drawout		H type (for MCGS)	
Phase distance		(mm)	320	
Weight	Breaker (H type) Cradle (Ha type)	(kg)	430 200	
Dimensions	Breaker (H type) Cradle (Ha type)		Page 232~233 Page 232~233	
Standards			IEC 62271-100	

Ratings - 24/25.8kV 25/31.5/40kA 1250/2000/2500/3150A

Susol

VH-20/25



Item	VH-20,25□25□25	VH-20,25□32□13/20/32	VH-20,25□40□13/20/32					
Rated voltage	Ur (kV)	24/25.8						
Rated normal current	Ir (A)	2500	1250	2000	3150	1250	2000	
Rated frequency ***	fr (Hz)	50/60				50/60		
Rated short-circuit current	Isc (kA)	25				40		
Rated short-time withstand current	Ik/tk (kA/s)	25/3				40/3		
Rated short-circuit breaking capacity	(MVA)	1039/1117				1662/1787		
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)				2.5×Isc (50Hz)/2.6×Isc (60Hz)		
Rated breaking time	(cycle)	3						
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV)	50 (65) <small>Note1)</small>					
		Up (kV)	125					
Rated operating sequence ****		O-0.3s-CO-15s-CO / O-0.3s-CO-3min-CO						
Control voltage	Closing coil Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220					
Auxiliary contacts			DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220					
Rated opening time	(sec)		4a4b, 10a10b					
No-load closing time	(sec)		≤ 0.04					
No-load closing time	(sec)		≤ 0.06					
Type test class	Mechanical Electrical Capacitive current switching		M2 E2 (List3) C2					
Installation version *	Fixed Drawout		P type H type (for MCSG)					
Phase distance **	(mm)	275	210 (275)	210 (275)	275	210 (275)	210 (275)	275
Weight	Breaker (H type) Cradle (H type)	(kg)	295	256 (273)	256 (273)	318	256 (273)	256 (273)
		(kg)	316	257 (284)	257 (284)	316	257 (284)	257 (284)
Dimensions	Breaker (H type) Cradle (H type)		Page 234	Page 236~239		Page 241	Page 236~239	
			Page 235	Page 237, 240		Page 242	Page 237, 240	
Standards		IEC 62271-100, KERI/KEMA, V-check (KESCO)						

* H type is a box type cradle with CB compartment style structure.

** () displays option of phase distance.

*** Rated frequency(fr) 50Hz is certified only to 24kV.

**** Rated operating sequence O-0.3s-CO-15s-CO is certified only to 24kV 40kA.

Note1) Contact us.

Ratings - 36kV 25/31.5/40kA 1250/2000/3150A

Susol

VH-36



Item	VH-36□25□13/20/32	36				VH-36□32□13/20/32	VH-36□40□13/20/32		
Rated voltage	Ur (kV)								
Rated normal current	Ir (A)	1250	2000	3150	1250	2000	3150	1250	2000
Rated frequency	fr (Hz)					50/60			
Rated short-circuit current	Isc (kA)	25				31.5			40
Rated short-time withstand current	Ik/tk (kA·s)	25/3				31.5/3			40/3
Rated short-circuit breaking capacity	(MVA)	1559				1964			2494
Rated short-circuit making current	Ip (kA)					2.5×Isc (50Hz)/2.6×Isc (60Hz)			
Rated breaking time	(cycle)					3			
Rated withstand voltage	Power frequency (1 min) Impulse ($1.2 \times 50\mu s$)	Ud (kV) Up (kV)				70 (95) <small>Note1)</small>			
						170			
Rated operating sequence						O-0.3s-CO-3min-CO			
Control voltage	Closing coil Trip coil	(V)				DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220			
		(V)				DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220			
Auxiliary contacts						4a4b, 10a10b			
Rated opening time		(sec)				≤ 0.04			
No-load closing time		(sec)				≤ 0.06			
Type test class	Mechanical Electrical Capacitive current switching					M2 E2 (List3) C2			
Installation version *	Fixed Drawout					P type H type (for MCGS)			
Phase distance		(mm)				300			
Weight	Breaker (H type) Cradle (H type)	(kg)	400	490	400	490	400	490	750
		(kg)	700	750	700	750	700	750	
Dimensions	Breaker (H type) Cradle (H type)		Page 243 Page 244	Page 245 Page 246	Page 243 Page 244	Page 245 Page 246	Page 243 Page 244	Page 245 Page 246	
Standards			IEC 62271-100, KERI/KEMA, V-check (KESCO)						

* H type is a box type cradle with CB compartment style structure.
Note1) Contact us.

Accessory

Susol



Mounting Position	Type	Accessory	Supplied as			Remarks	page
			VL: 7.2kV 8/12.5kA	VL: 20/25kA	VH		
Breaker (Internal)	M	Motor	●	●	●	Attached at the factory	61
	CC	Closing Coil	●	●	●	Attached at the factory	62
	TC	Trip Coil	●	●	●	Attached at the factory	63
	A1	Secondary Trip Coil	Option	Option	Option	Attached at the factory	64
	A2	Secondary Trip Coil with TCM Contact	-	Option	Option	Attached at the factory	64, 80
	T9	Current Trip Coil	Option	Option	-	Attached at the factory	65
	SA (SB)	Auxiliary Contact 2a2b	●	-	-	Attached at the factory	66
		Auxiliary Contact 4a4b	Option	●	●		
		Auxiliary Contact 6a6b	Option	-	-		
		Auxiliary Contact 10a10b	-	Option	Option		
	U	Under Voltage Trip Coil	Option	Option	Option	Attached at the factory	67
	A3	Position S/W(Test: 1a1b, Service: 2b)	Option	Option	Option	Attached at the factory	68
	A4	Position S/W(Test: 2a, Service: 2a)	Option	Option	Option	Attached at the factory	68
	A5	Position S/W(Test: 1a1b, Service: 1a1b)	Option	Option	Option	Attached at the factory	68
	A6	Latch Checking Switch	-	-	Option	Attached at the factory	69
	C	Counter	●	●	●	Attached at the factory	69
	A7	Keylock	Option	Option	Option	Attached at the factory	70
	A8	Button Padlock	Option	Option	Option	Attached at the factory	71
	A9	Button cover	Option	Option	Option	Attached at the factory	72
	AA	Lead Wire: A/B type connector	Option	Option	Option	Attached at the factory	73
	AB	Plug/Terminal for Lead Wire	Option	Option	Option	Attached at the factory	73
	AC	Plug Interlock	-	Option	Option	Attached at the factory	77
	AD	Padlock (H type)	-	Option	Option	Attached at the factory	77
	AE	MOC(Mechanical Operated Cell Switch	-	Option	Option	Attached at the factory	78
	AF	Locking Magnet	-	Option	Option	Attached at the factory	79
	AJ	Door Interlock	-	Option	Option	Attached at the factory	89
	AO	Lead Wire: A type connector (Special Color: Blue)	Option	Option	-	Attached at the factory	91
Breaker (External)	Trip Coil Monitoring Contact		●	●	●	Attached at the factory	80
	CTD1	Condenser Trip Device(AC110V)	Option	Option	Option	-	82
	CTD2	Condenser Trip Device(AC220V)	Option	Option	Option	-	82
	UDC1	UVT Time Delay Controller(AD110V)	Option	Option	Option	-	83
	UDC2	UVT Time Delay Controller(AD220V)	Option	Option	Option	-	83
	UDC3	UVT Time Delay Controller(AD48V)	Option	Option	Option	-	83
	CTU	Coil Test Unit	Option	Option	Option	-	81
	TM	Temperature Monitoring	-	Option	Option	-	84

* ●: Basic Installation



Accessory



Susol



Mounting Position	Type	Accessory	Supplied as			Remarks	page
			VL: 7.2kV 8/12.5kA	VL: 20/25kA	VH		
Cradle	A1	ES(Earthing Switch) without Option	-	Option	Option	Attached at the factory	85
	A2	ES(Earthing Switch) with Position Switch(2a2b)	-	Option	Option	Attached at the factory	85
	A4	ES(Earthing Switch) with Position Switch(6a6b)	-	Option	Option	Attached at the factory	85
	A5	Keylock for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	A6	Locking magnet(DC110V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	A7	Locking magnet(DC220V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	A8	Locking magnet(DC125V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	A9	Locking magnet(DC24V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AA	Locking magnet(DC48V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AB	Locking magnet(AC48V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AC	Locking magnet(AC110V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AD	Locking magnet(AC220V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AE	Shutter padlock	-	Option	Option	Attached at the factory	87
	AF	TOC(Truck Operated Cell Switch)	-	Option	Option	Attached at the factory	87
	AG	MOC(Mechanical Operated Cell Switch)	-	Option	Option	Attached at the factory	86
	AH	Door	-	Option	Option	Attached at the factory	88
	AJ	Door Interlock	-	Option	Option	Attached at the factory	89
	AK	Door Emergency Push Button	-	Option	Option	Attached at the factory	89
	AL	Temperature Sensor	-	Option	Option	Attached at the factory	90
	AM	Type H Lead Wire 4a4b (Normal cable)	-	Option	Option	Attached at the factory	91
	AN	Type H Lead Wire 10a10b (Normal cable)	-	Option	Option	Attached at the factory	91
	AO	Type H Lead Wire 4a4b (Flame retardant cable)	-	Option	Option	Attached at the factory	91
		Door padlock	-	Option	Option	Attached at the factory	91

Motor: M

Installed inside of a breaker as standard

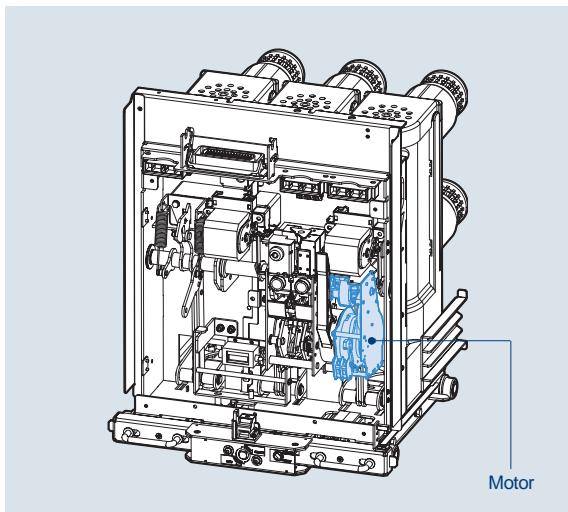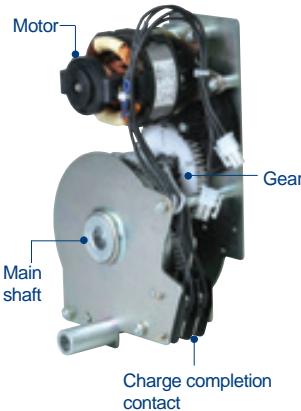
VL type

- Charge the closing spring of a circuit breaker by the external power source. When the charging is complete, control power of the motor will be "OFF" by the built-in Limit S/W. Without the external power source, charge manually.

Operating voltage range (IEC 60947)
85%~110%Vn

	VL type							
Input voltage (Vn)	DC 24~30V	DC 48~60V	DC 110V	DC 125V	DC 220V	AC 48V	AC 100~130	AC 200~250V
Load current (A)	≤ 5	≤ 3	≤ 1	≤ 1	≤ 0.5	≤ 3	≤ 1	≤ 0.5
Starting current (A)	5 times of load current							
Charge time	Within 5 sec.							

Note) Rated operation and control voltage range, see page 65.

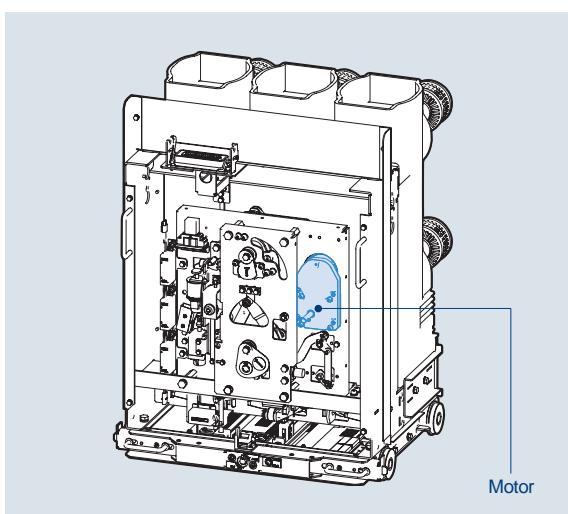VH type

	VH Type						
Input voltage (Vn)	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V
Load current (A)	≤ 6	≤ 3	≤ 3	≤ 2.6	≤ 6	≤ 3	≤ 2.6
Starting current (A)	≤ 30	≤ 20	≤ 20	≤ 17	≤ 30	≤ 20	≤ 17
Charge time	Within 12 sec.						

Note) Rated operation and control voltage range, see page 65.


Accessory

Susol

Closing Coil: C

Installed inside of a breaker as standard

VL type

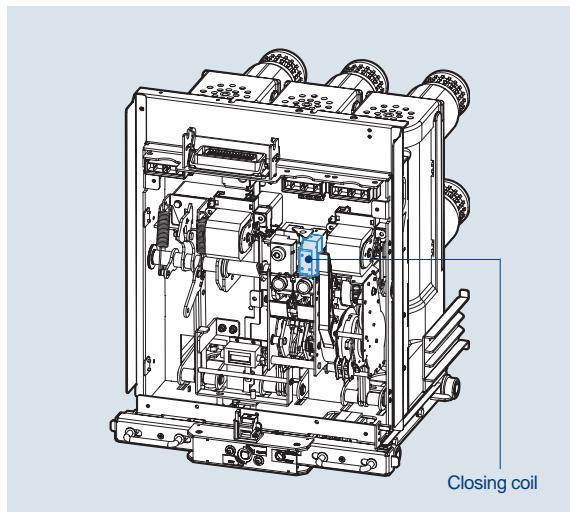


- It is a control device which closes a circuit breaker, when applying voltage continuously or instantaneously over 200ms to the coil control terminals.

	VL type							
Input voltage (Vn)	DC 24~30V	DC 48~60V	DC 110V	DC 125V	DC 220V	AC 48V	AC 100~130	AC 200~250V
Power consumption (inrush, W)	200							
Power consumption (steady, W)	≤ 5							

Note) Rated operation and control voltage range, see page 65.

VH type

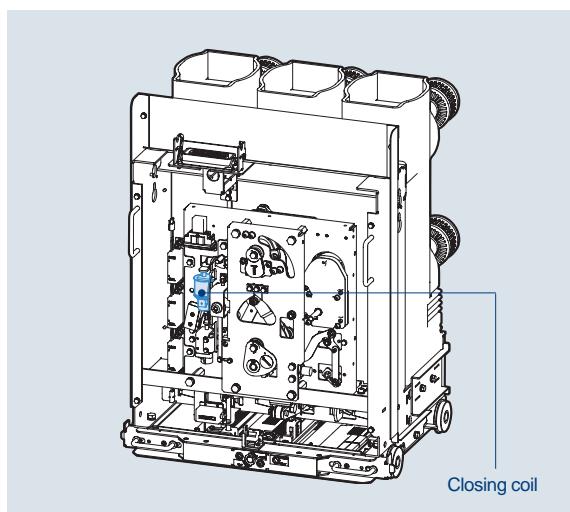

- It is a control device which closes a circuit breaker, when applying voltage continuously about 45ms to the coil control terminals. Electrical pumping preventing circuit is built in.


	VH Type						
Input voltage (Vn)	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V
Rated current (A)	≤ 8	≤ 3	≤ 3	≤ 2.5	≤ 8	≤ 3	≤ 2.5

Note) Rated operation and control voltage range, see page 65.

Trip Coil: T

Installed inside of a breaker as standard

VL type

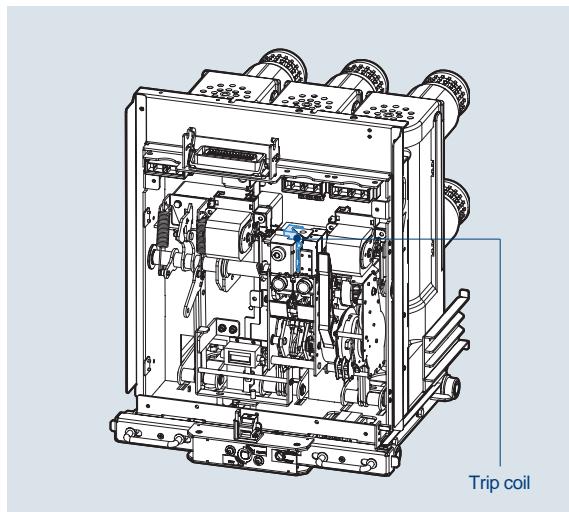


- It is a control device which trips a circuit breaker from remote place, when applying voltage continuously or instantaneously over 35ms to coil control terminals.
- When UVT coil is installed, its location is changed.

	VL type							
Input voltage (Vn)	DC 24~30V	DC 48~60V	DC 110V	DC 125V	DC 220V	AC 48V	AC 100~130	AC 200~250V
Power consumption (inrush, W)	200							
Power consumption (steady, W)	≤ 5							

Note) Rated operation and control voltage range, see page 65.

VH type

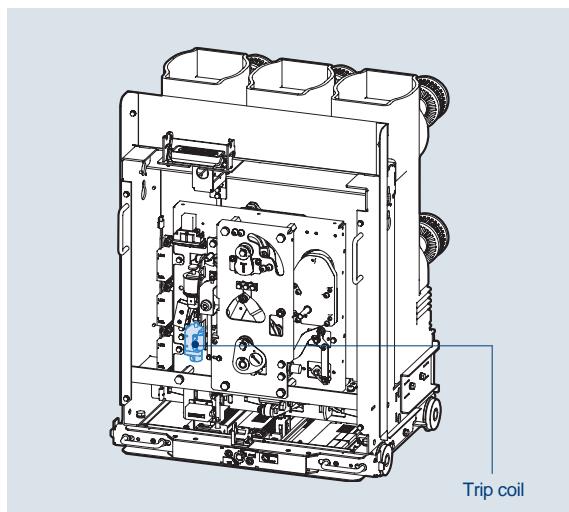

- It is a control device which trips a circuit breaker, when applying voltage continuously or instantaneously over 35ms to the coil control terminals.

	VH Type						
Input voltage (Vn)	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V
Rated current (A)	≤ 8	≤ 3	≤ 3	≤ 2.5	≤ 8	≤ 3	≤ 2.5

Note) Rated operation and control voltage range, see page 66.

Accessory


Susol

Secondary Trip Coil: A1

Installed inside of a breaker as an option

Secondary Trip Coil with TCM Contact : A2


VL type

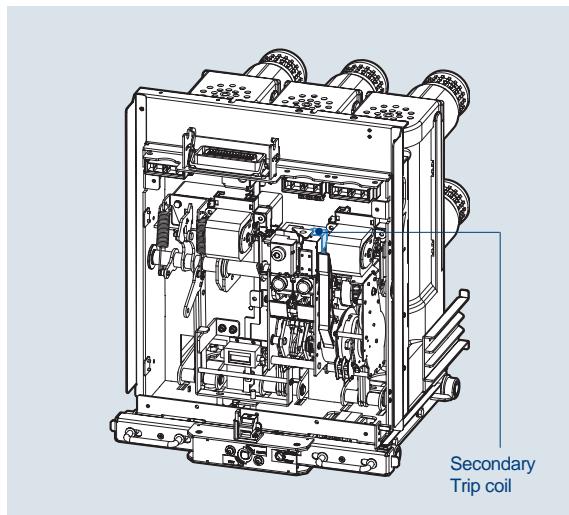

- It is a control device which trips a circuit breaker doubly from the outside. If the trip coil (T) fails, it can trip a circuit breaker safely.
- Trip coil: Install it at existing location.
- Secondary trip coil: Install it on the right side of the trip coil.
- It is not available with UVT coil when installing secondary trip coil.

	VL type							
Input voltage (Vn)	DC 24~30V	DC 48~60V	DC 110V	DC 125V	DC 220V	AC 48V	AC 100~130	AC 200~250V
Power consumption (inrush, W)	200							
Power consumption (steady, W)	≤ 5							

VH type

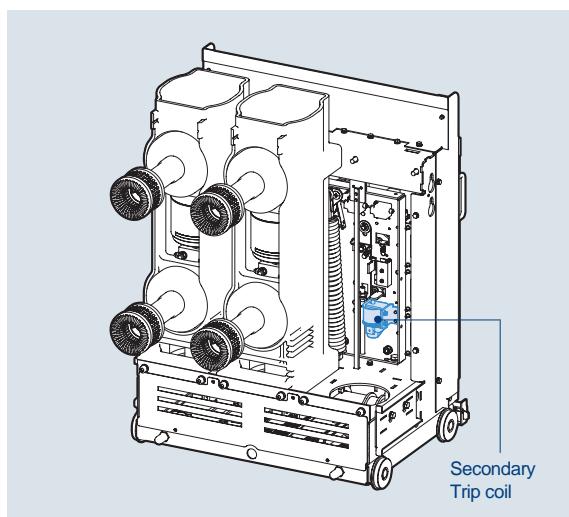

- It is a control device which trips a circuit breaker doubly from the outside. If the trip coil (T) fails, it can trip a circuit breaker safely.
- It is not available with UVT coil when installing secondary trip coil.

	VH Type						
Input voltage (Vn)	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V
Rated current (A)	≤ 8	≤ 3	≤ 3	≤ 2.5	≤ 8	≤ 3	≤ 2.5


Rated operation and control voltage range

Item		Susol VCB			Remarks
		VL: 7.2kV 8/12.5kA	VL: 20/25kA	VH	
Motor	AC	85~110%	85~110%	85~110%	
	DC	75~110%	85~110%	85~110%	
Closing	AC	85~110%	85~110%	85~110%	
	DC	75~125%	85~110%	85~110%	
Trip	AC	60~125%	85~110%	85~110%	
	DC	60~125%	70~110%	70~110%	
Applied standards		IEC62271-100 (2008) KSC4611	IEC62271-100 (2008)	IEC62271-100 (2008)	

Current Trip Coil

Installed inside of a breaker as an option



VL type : T9

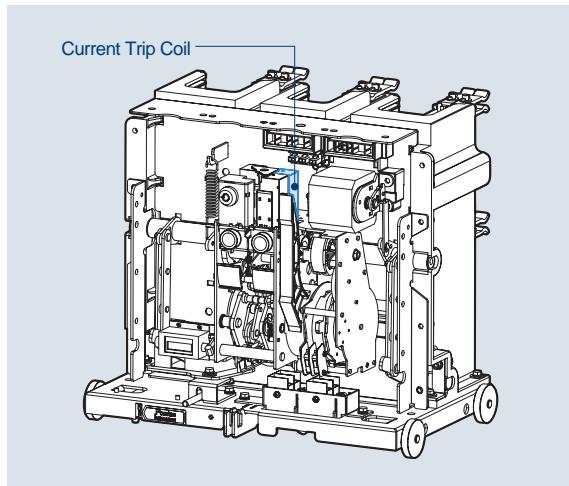

- This trip coil uses the output of the CT as its control power source and is used with over current relay in combination. Two current trip coils are supplied.
- Coil burden is 90VA.(T9)
- Coil impedance(Z) is like below
 - 3A: 10Ω or less, Operating current AC 3A (T9)
 - 1A: 160Ω or less, Operating current AC 1A (AV)
 - 5A: 6Ω or less, Operating current is AC 5A (AW)
- CT must be installed at load side.
If it is installed at bus side there is the danger of malfunction or damage to CT.
- Don't disconnect the control power connector on main power is live condition at service position.
Otherwise there is the danger of malfunction or damage to CT.

* CT is recommended to use 15VA 5P10 and more.

VL type : AV, AW

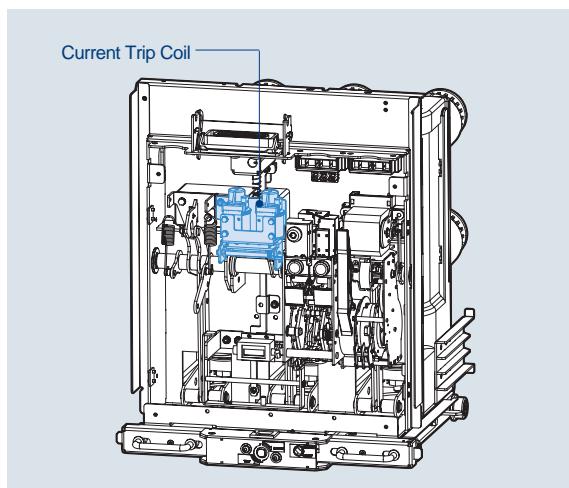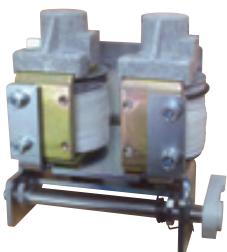


Accessory

Susol

Auxiliary Contact: SA

Installed inside of a breaker as an option



VL type

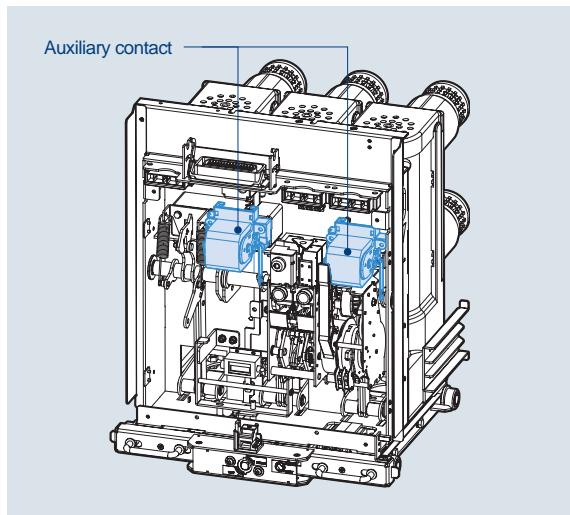

- It is a contact used to monitor ON/OFF status of a breaker from remote place.
- The auxiliary contacts supplied as standard configuration is 4a4b. 10a10b is also available on request.
- For 7.2kV 8/12.5kA VCB standard configuration is 2a2b. 4a4b and 6a6b are optional.

Item	VL: 7.2kV 8/12.5kA	VL: 20/25kA, VH
Standard	2a2b	4a4b
Optional	4a4b, 6a6b	10a10b

VH type

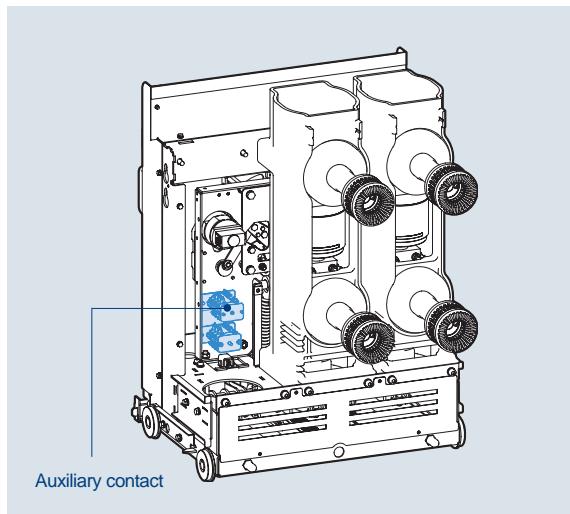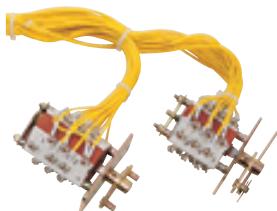

VL/VH Type						Remarks
Item		Resistive load (A)		Inductive load (A)		Remarks
Contact configuration	AC	250V	10	5		
		125V	10	5		
	DC	250V	10	5		
		125V	10	5		
		30V	10	5		

Under Voltage Trip Coil: U

Installed inside of a breaker as an option

VL type





VL type



VH type

VH type

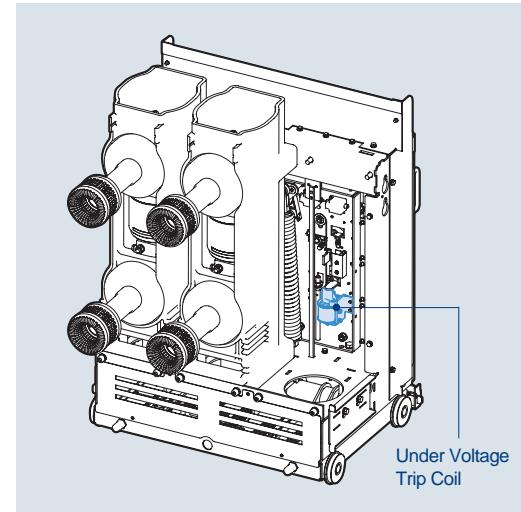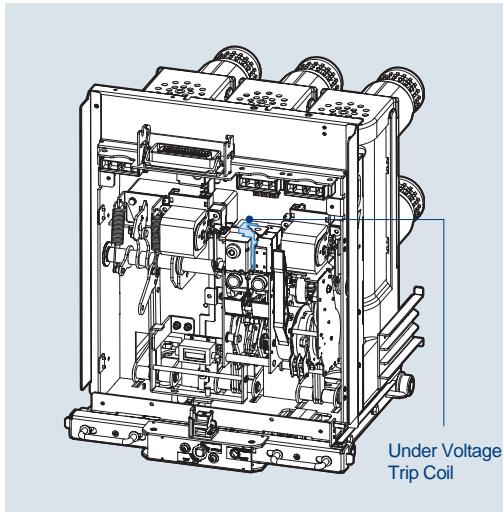

- It is installed inside of a breaker to trip when the main power or control power voltage drops below certain value. Instantaneous type is only available with UVT coil and Time delay type is available by connecting UVT coil and UVT time delay controller.
- The closing of a circuit breaker is impossible mechanically or electrically if control power is not supplied to UVT. To close the circuit breaker, 65~85% of rated voltage should be applied.
- UVT and secondary trip coil will not be selected together.

1. UVT rated voltage and characteristic

- Operating voltage range: Pick up 0.65~0.85Vn, Drop out 0.4~0.6Vn
- Operating voltage ranges based on the minimum value of each rated voltage (Vn)

	VL type							
Input voltage (Vn)	DC 24~30V	DC 48~60V	DC 110V	DC 125V	DC 220V	AC 48V	AC 100~130	AC 200~250V
Power consumption (inrush, W)	200							
Power consumption (steady, W)	≤ 5							

	VH Type						
Input voltage (Vn)	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V
Power consumption (inrush, W)	350						
Power consumption (steady, W)	≤ 10						

Accessory

Susol

Position Switch: A3, A4, A5

Installed inside of a breaker as an option


VL type - E/F/G Cradle




Small VCB (VL)



Medium VCB (VL)

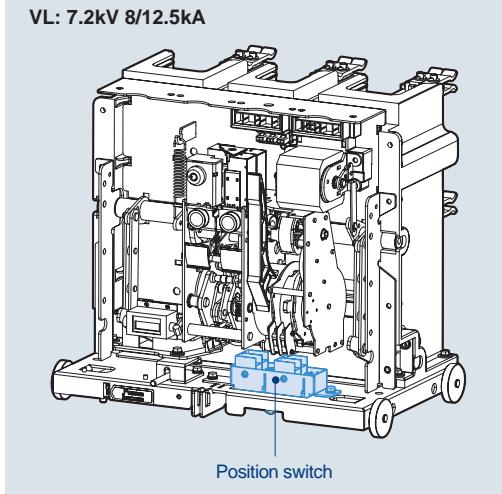


VL: 7.2kV 8/12.5kA

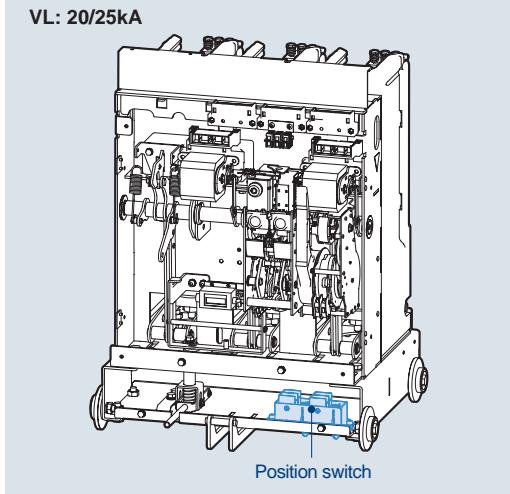


VL: 20/25kA


VL/VH type - H Cradle

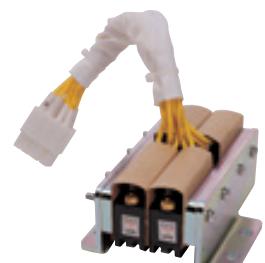

Large model (VH)

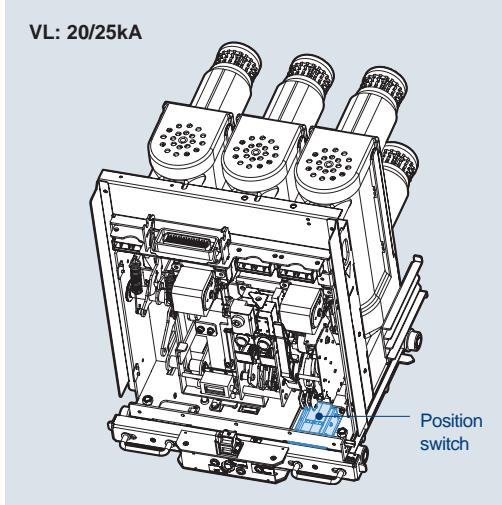


VL: 20/25kA

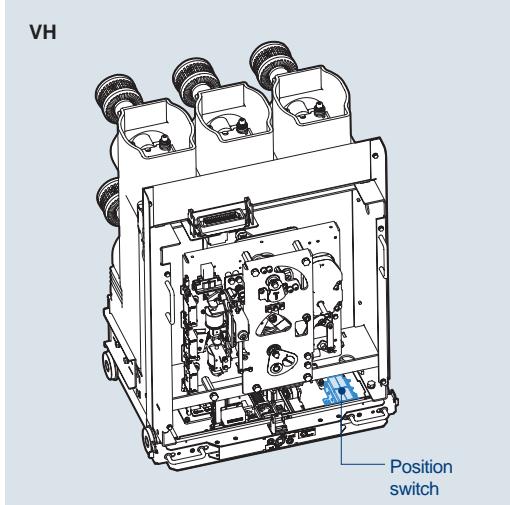

VH



Contact configuration

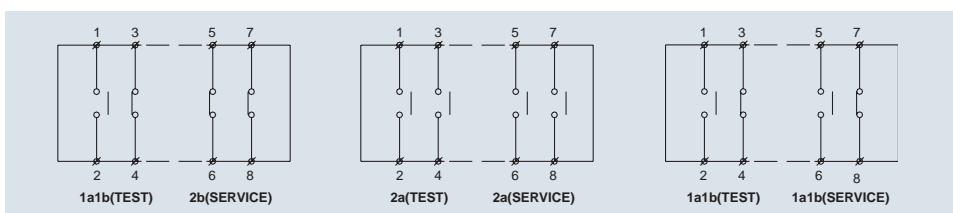

Latch checking switch: A6

Installed inside of a breaker as an option

VH type

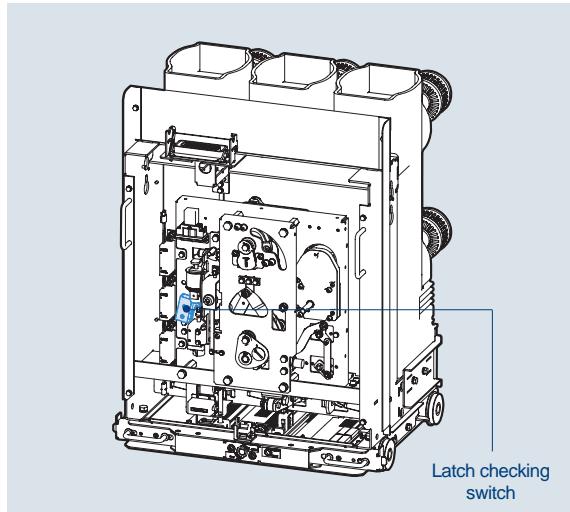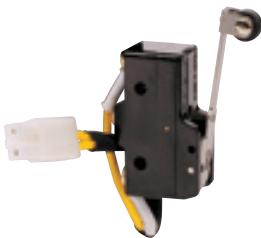

- This switch works in conjunction with the mechanism of the breaker. It checks if the breaker is ready to be closed.
- When the mechanism is OFF and the closing spring is at charged status the switch becomes "ON", which means the mechanism is ready to be closed.
- If the latch is not in a proper position the switch prevents the breaker from closing.
In case of VH type it is connected internally in series with the closing coil.

Counter: C

Installed inside of a breaker as standard

VL/VH type



- It displays the total number of ON/OFF operations of a breaker.


Accessory

Susol

Keylock: A7

Installed inside of a breaker as an option

VL type

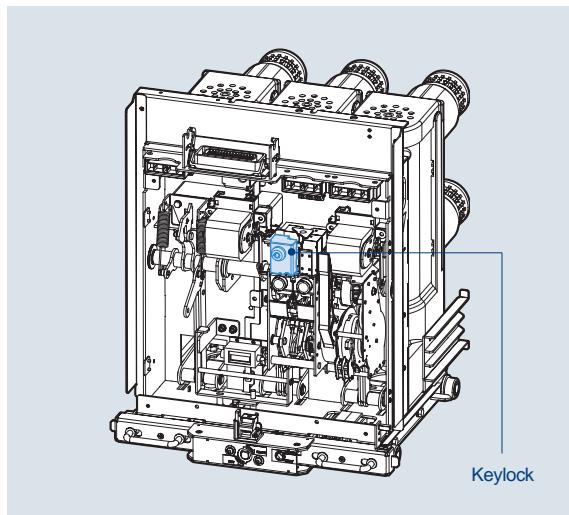


- The key is to unlock the locking device first to close the breaker electrically and mechanically.

*How to operate

- It is not possible to pull out the key in the unlocked position, possible only in locked status.
- Pushing "OFF" switch of a breaker turn the key counter-clockwise to the locked position and pull it out.
- It is not possible to close the breaker electrically and mechanically in the locked position.
- Insert the key and turn clockwise and then the breaker can be closed electrically and mechanically.

VH type

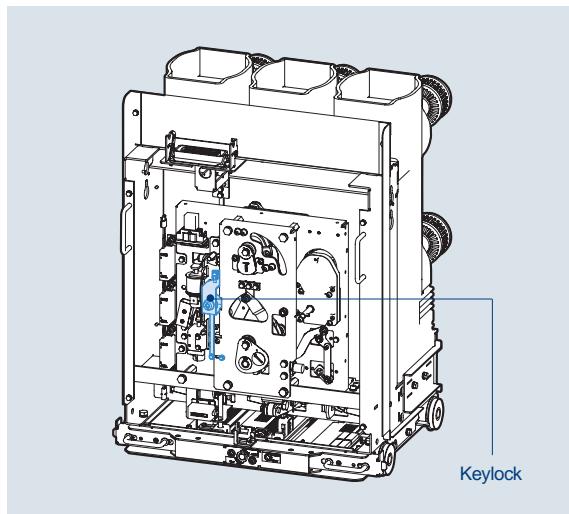


*How to operate

- It is not possible to pull out the key in the unlocked position, possible only in locked status.
- Trip the breaker first and then turn the key counter-clockwise to the locked position and pull it out.
- It is not possible to close the breaker electrically and mechanically in the locked position.

Button Padlock: A8

Installed outside of a breaker as an option


VL type

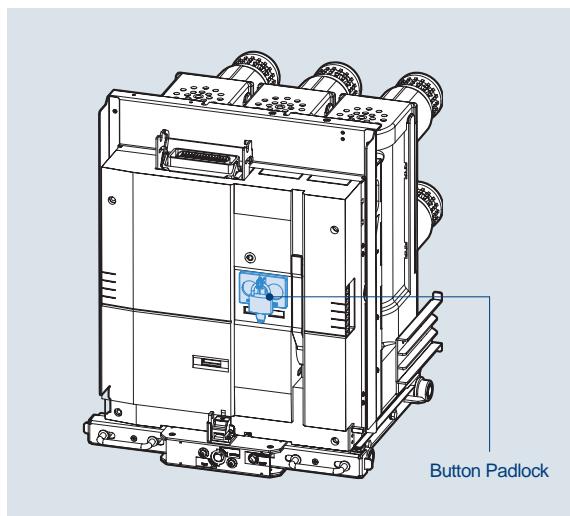

- It is to prevent manual operation of ON/OFF button due to user's wrong handling.
- It is not possible to handle ON/OFF operation under the "Button lock" status.

* Key lock is not supplied.

VH type

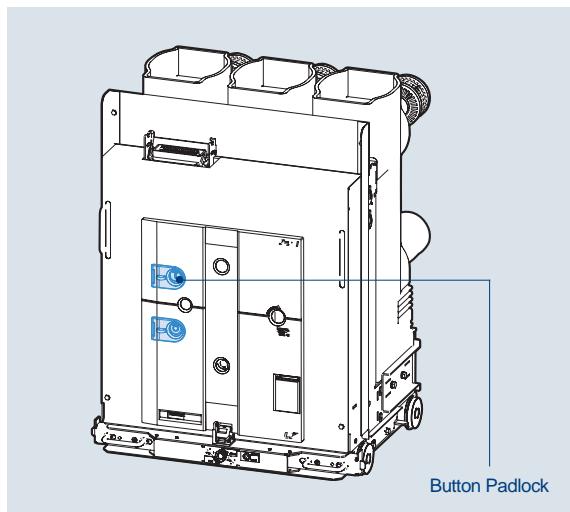


Accessory

Susol

Button Cover: A9


Installed outside of a breaker as an option

VL type

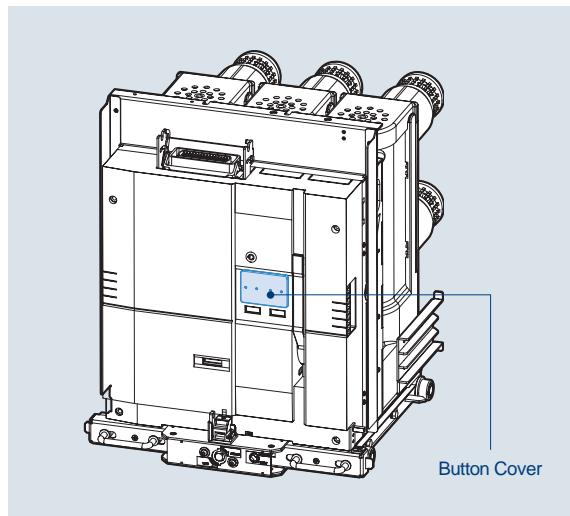

- It is a protection cover to prevent an accident due to unintended operation of ON/OFF button.
- Use the push-bar to operate the ON/OFF button.



VH type

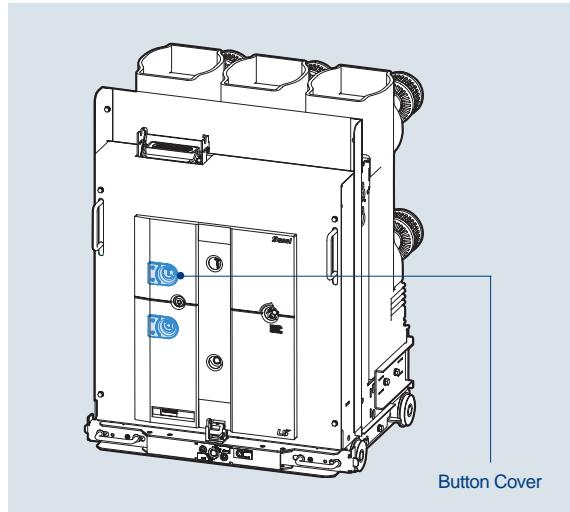

Lead wire

Supplied separately from a breaker as an option

VL/VH type

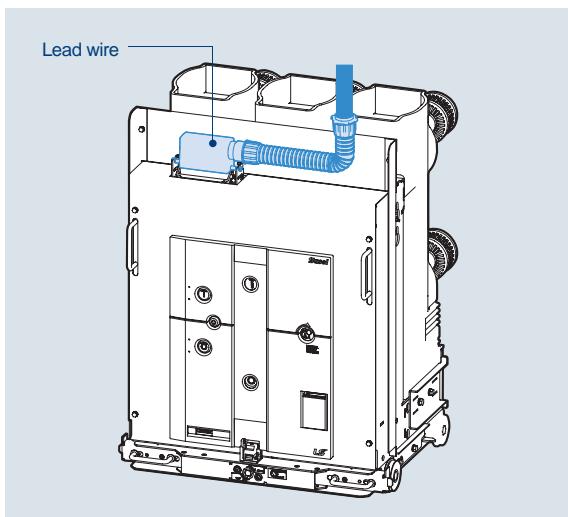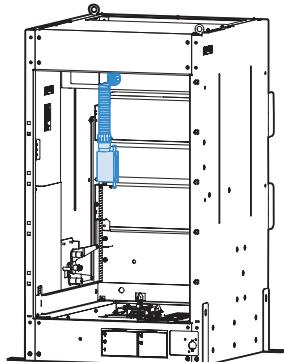

- The wiring for connecting the control circuit of the circuit breaker from the outside is supplied with 2m of wiring.
- A type connector is supplied for P/E/F/G type of VL VCB.
- B type connector is supplied for P type of VH VCB.
- In case of H type breaker of VL and VH models the Lead wire is installed in the cradle when supplied.

Supply ways of Lead wires by VCB model

VCB model	Cradle type	P	E	F	G	H
VL			Purchase separately (see page 74)			Optional purchase or cradle shipment (optional)
VH			Purchase separately (see page 74)			Optional purchase or cradle shipment (optional)

Plug/Terminal for lead wire

Supplied separately from a breaker as an option

VL/VH type



A type connector



B type connector

- It is connector to connect with the connector installed in the breaker. (supply connectors and terminal only for lead wire)
- Type of connector is depends on the type of connector installed in the breaker- A or B.

Accessory





Susol

Standard Lead Wire

Type	Detailed breaker type	Wiring type	Auxiliary contact connector	Flammability rating	Color	Standard wiring (-)	Optional wiring (A1,A2,A3,A4,A5)
VL-Type	VL-06□08,13□04,06	Lead wire	SA1	HB	yellow	70723171101	70723171102
				blue	70723171107	70723171108	
			XHHW	yellow	70723171113	70723171114	
				blue	70723171120	70723171121	
			SA2	HB	yellow	70723171105	70723171106
				blue	70723171111	70723171112	
			XHHW	yellow	70723171117	70723171118	
				blue	70723171122	70723171123	
			SA3	HB	yellow	70723171103	70723171104
				blue	70723171113	70723171114	
		User plug	SA1 SA2 SA3	XHHW	yellow	70723171115	70723171116
		blue	70723171124	70723171125			
				77023171003	77023171003		
VL-Type	VL-06,12,17,20,25□20,25,31.5,40□13,20,25,32	Lead wire	SA2	HB	yellow	70723172101	70723172102
				blue	70723172112	70723172113	
			XHHW	yellow	70723172116	70723172117	
				blue	70723172144	70723172145	
			SA4	HB	yellow	70723172103	70723172104
				blue	70723172114	70723172115	
			XHHW	yellow	70723172118	70723172119	
				blue	70723172146	70723172147	
			SB2	HB	yellow	70723172107	70723172107
				blue	70723172149	70723172149	
			XHHW	yellow	70723172109	70723172109	
				blue	70723172150	70723172150	
			SB4	HB	yellow	70723172108	70723172108
				blue	70723172151	70723172151	
			User plug			77023172101	77023172101
						77023172101	77023172101
						70723172110	70723172110
						70723172111	70723172111
VH-Type	VH-06,12,17,20,25,36□32,40,50□13,20,25,32,40,50	Lead wire	SB2	HB	yellow	70723173109	70723173109
				blue	70723173111	70723173111	
			XHHW	yellow	70723173119	70723173119	
		SB4	HB	blue	70723173112	70723173112	
				yellow	70723173110	70723173110	
				blue	70723173113	70723173113	
LVB-Type	LVB-06,12□-32,40□/12,20,30 VH-06,12□32,40□12,20,30 (Pro-MEC & Susol PI)	Lead wire	User plug	SA2		70723173105	70723173105
				SA4		70723173106	70723173106
			SA2	HB	yellow	70723143117	70723143117
				blue	70713143020	70713143020	
			XHHW	yellow	70713143012	70713143012	
				blue	70713143030	70713143030	
			SA4	HB	yellow	70723143118	70723143118
				blue	70713143021	70713143021	
			XHHW	yellow	70713143013	70713143013	
				blue	70713143031	70713143031	
			SB2	HB	yellow	70713143024	70713143024
				blue	70713143044	70713143044	
			XHHW	yellow	70713143049	70713143049	
				blue	70713143047	70713143047	
			SB4	HB	yellow	70713143025	70713143025
				blue	70713143045	70713143045	
			XHHW	yellow	70713143048	70713143048	
				blue	70713143046	70713143046	
			User plug	SA2		73263143007	73263143007
				SA4		73263143008	73263143008
				SB2		73263143030	73263143030
				SB4		73263143031	73263143031

— Please contact us.



Handle & Lifting Hook

Breaker type	Cradle	Racking handle		Spring charge handle		Lifting Hook		
		code	Appearance	code	Appearance	Breaker type	code	Appearance
VL-06□08,13	P	N. A.				VH-06,12, 17□50□13, 20,25,32	75123173131	
	E, F, G	55223171101						
VL-06,12, 17□20,25,31.5	P	N. A.				VH-20,25□25□25	75123173132	
	E, F, G	55213143005						
VL-24,25□13, 16,25	H.K	A type	55223172407		For medium size CB [Short]	VH-20,25□32, 40□13,20,32	75123173105	
		B type	55223172403		For medium size CB [Long]			
		C type	55223172405		With universal joint and plastic grip	VH-36□25,32, 40□13,20,32	75123173165	
		D type	55223172406		With universal joint			

Accessory

Susol



Handle & Lifting Hook

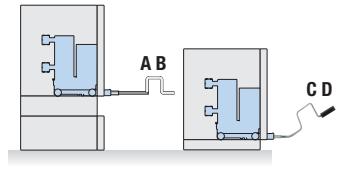Breaker type	Cradle	Racking handle		Spring charge handle		Lifting Hook					
		code	Appearance	code	Appearance	Breaker type	code	Appearance			
VH-06□32, 40(P,E,F,G) LVB-06, 12□32,40L(G/T)	P	N. A.		55213143006		VH-06,12, 17□40,50□40	75123173981				
		E, F, G	55213143005				75123173982				
		55213143001					Earthing switch operating handle (Common)				
	G/T	55213143022					Panel door type				
		55213163003					Right open (Standard handle)	55223172701			
		With universal joint					Right open (Standard handle)	55223172703			
VH-06, 12,17□50 VH-20,25, 36□25,32,40	P	N. A.									
		A type	55223172407								
		B type	55223172403								
		C type	55223172405								
		D type	55223172406								

Plug interlock: AC

Installed inside of a breaker as an option

VL/VH type (7.2kV 20/25kA 630A~)

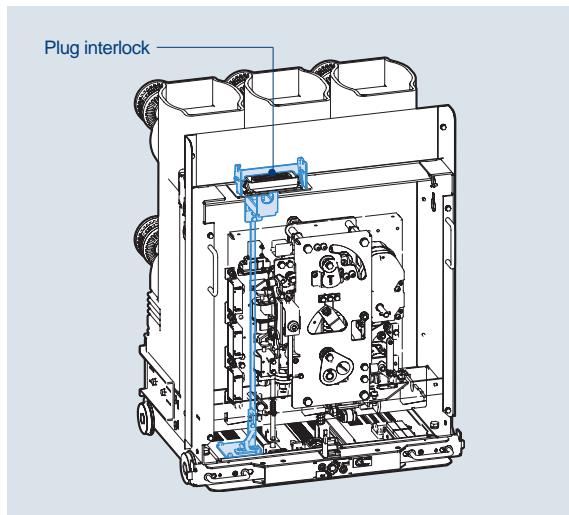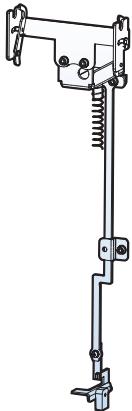


- It checks if the control power connector on the cradle (H type) is connected with the connecting terminal of the breaker before the proceeding of draw-in or out.
- It is not allowed to separate the control power connector from the breaker in the position of draw-in /out or SERVICE, but TEST position.

Padlock/Door racking interlock: AD

Installed outside of a breaker as an option

VL/VH type (7.2kV 20/25kA 630A~)

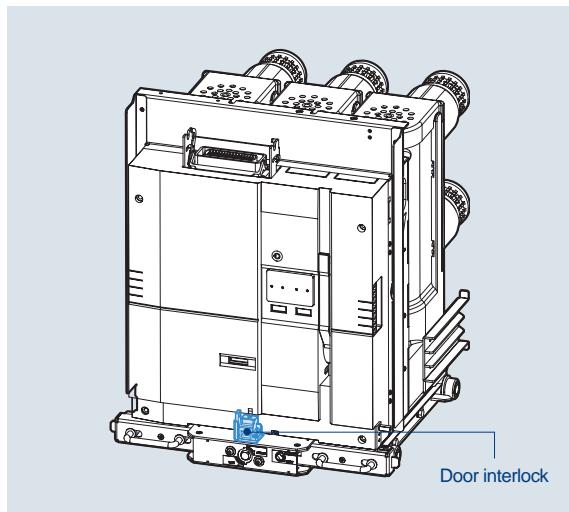

- With this door options for H type cradle draw- in/out is allowed only when the door is closed.
- If draw-in /out is necessary when the door is open, use the operation lever put in the slot of the breaker handle. Insert it into the hole in the bottom of door interlock.
- Padlock is also optional, which can lock to prevents the draw-in/out of the breaker in the position of TEST and SERVICE.



Accessory

Susol

MOC drive device: AE



Installed inside of a breaker as an option

VL type (7.2kV 20/25kA 630A~)

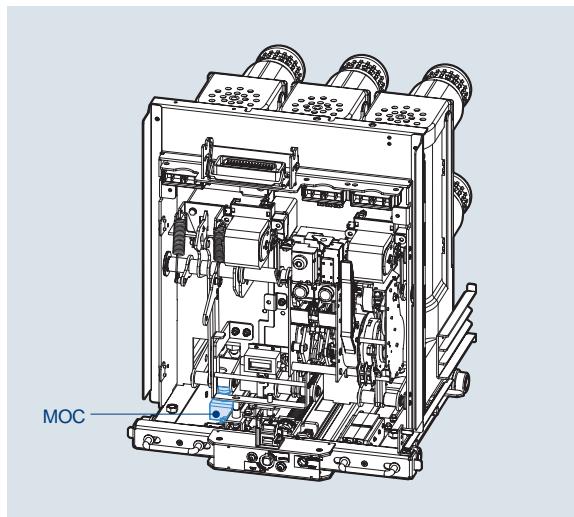

- It must be installed in the breaker to drive the MOC installed in H type cradle.
- MOC, Mechanically operated cell switch is the device to indicates the Closed/Trip status of VCB in 'SERVICE' position only.
- This MOC drive device in the breaker should be installed when MOC in the cradle is used.


VH type

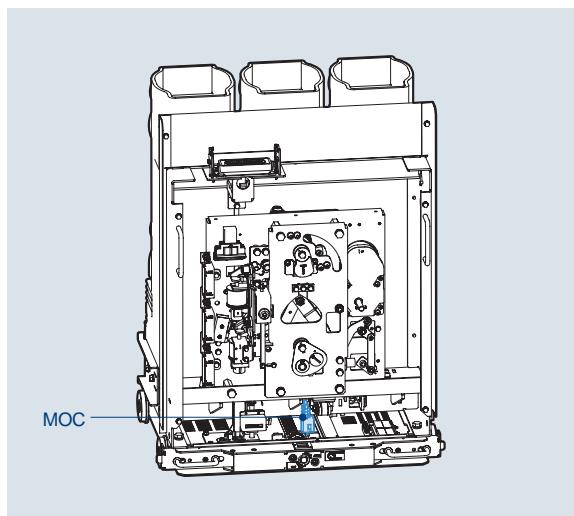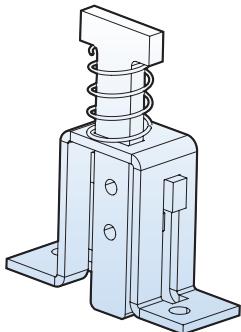

Locking magnet: AF

Installed inside of a breaker as an option

VL type

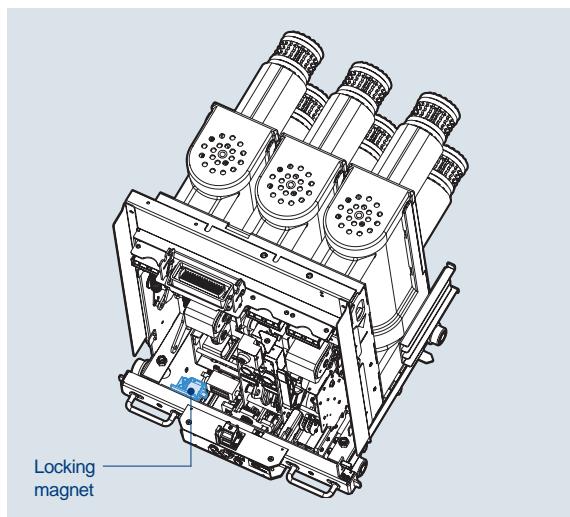


- It allows the drawing-in of the breaker in the TEST position under the condition that the control power connector on the cradle (H type) is connected with the connecting terminal of the breaker and the power is supplied.

- During the drawing-in or in the SERVICE position draw-in/out is allowed without supplying power.

* Control power rating is the same as that of a motor.

VH type

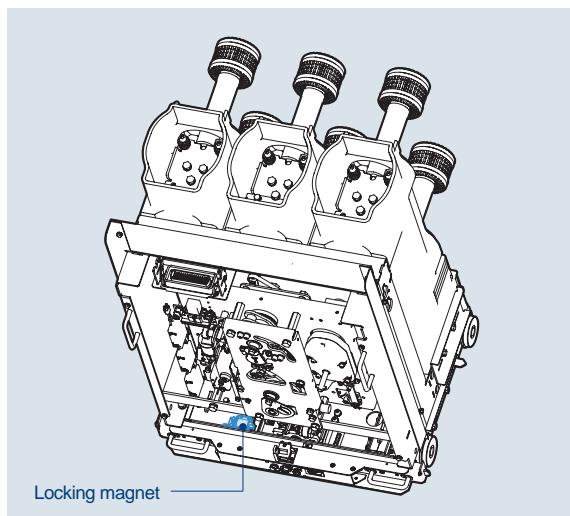


Accessory

Susol

Trip coil monitoring contact

Installed inside of a breaker as standard

VL type

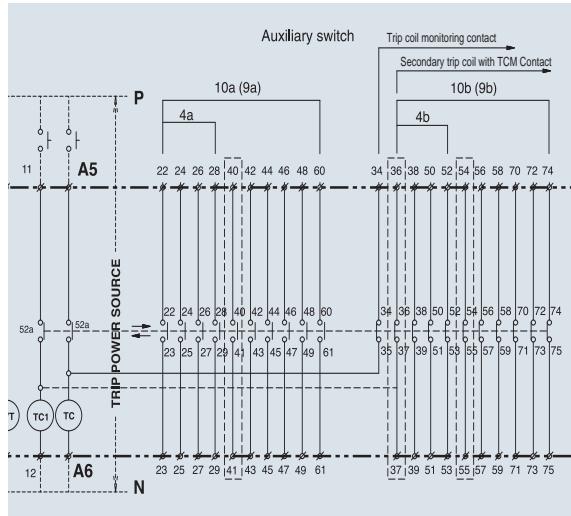


- Device for monitoring the functions of the trip coils.

- To monitor the trip coils connect its terminals with the trip coil monitoring relay as shown on the circuit diagram.
 - If the trip coil is normal: closed-circuit consisting
 - If the trip coil is damaged: open circuit
- 1) Terminal A5 and A6 monitor the trip coils(TC) in Closed position of the breaker
- 2) Terminal A6 and auxiliary contact terminal 34 monitor the trip coils(TC) in trip position of the breaker
- 3) Terminal 11 and 12 monitor the secondary trip coils(TC1) in Closed position of the breaker
- 4) Terminal 12 and auxiliary contact terminal 36 monitor the secondary trip coils(TC1) in trip position of the breaker

- Coil Test Unit is optional, which enable monitoring the coils by connecting in parallel with the trip coil operation switch.


- In case Secondary Trip Coil Monitoring contact for VH Type, Every Trip Coil is available.
(VL Type : Trip Coil T1,T2,T3,T4,T5 are available)

VH type

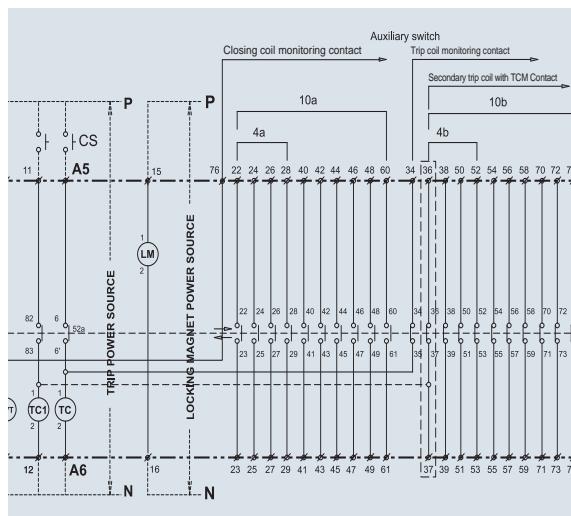

Coil Test Unit: CTU

Installed outside of a breaker as an option

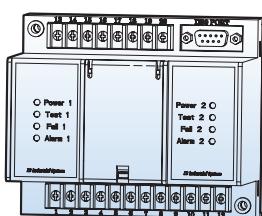

- When no current flows through the coil it gives the test current which does not cause the coil to operate to check whether the coil is disconnected or not.
- If the test current flows normally: coil normal
- If the test current does not flow through: coil disconnected



※ As it is connected in parallel with the control part of the coil the normal operation of the coil is not affected.

※ Monitoring of the running coils is not possible.

※ One test unit can monitor up to two coils.

1. Input voltage: AC/DC 75V~264V
2. Contact output
 - 1) 2×a contacts for Fail indication and 2×a contacts for Alarm
 - 2) 250Vac/10A Resistive, 30Vdc/10A Resistive
3. Disconnection test cycle is 12 seconds (Test LED blinks)
4. The default operation

If Fail happens (coil disconnected), Fail LED turns on and the Fail contacts become short state.
If Fail happens three times in series, Alarm LED turns on and the Alarm contacts become short state.
In order to clear the Alarm status push up DIP switch on the front and then push down it (Off → On → Off)

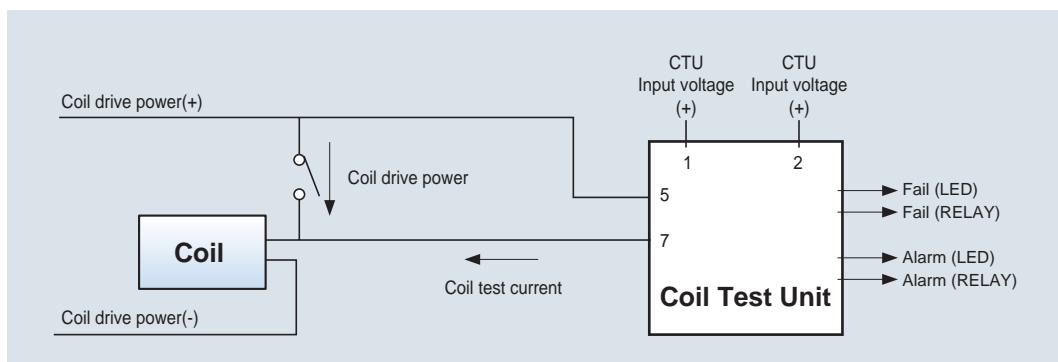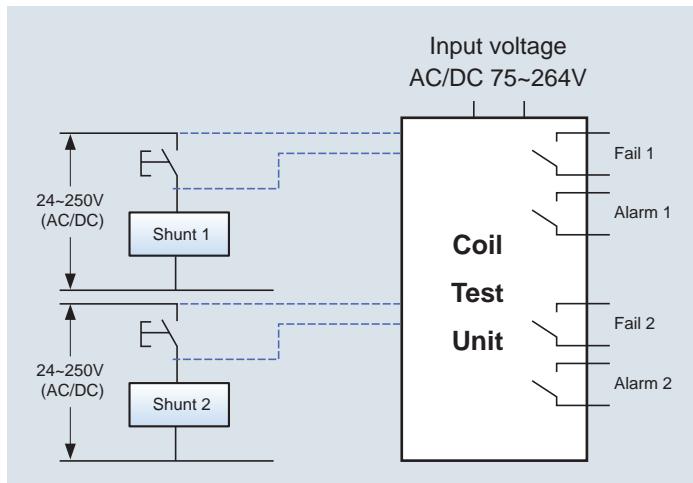

Accessory

Susol

Condenser trip device: CTD

Installed outside of a breaker as an option




Ratings


Ratings	Specification	
Model	CB - T1	CB - T2
Rated input voltage (V)	AC 100/110	AC 200/220
Frequency (Hz)	50/60	50/60
Rated charge voltage (V)	140/155	280/310
Charging time	Within 10sec.	Within 10sec.
Trip possible time	Within 30sec.	Within 30sec.
Range of Input voltage	85%~110%	85%~110%
Condenser capacity (μ F)	1,000	560

- It gets a circuit breaker tripped electrically within regular time when control power supply is broken down and is used with Shunt coil, SHT. In case there is no DC power, It can be used as the rectifier which supplies DC power to a circuit breaker by rectifying AC power.
- Tripping within 30 seconds on the power failure is possible. However after that automatic trip circuit must be configured separately in the switchgear.

Terminal arrangement External dimension

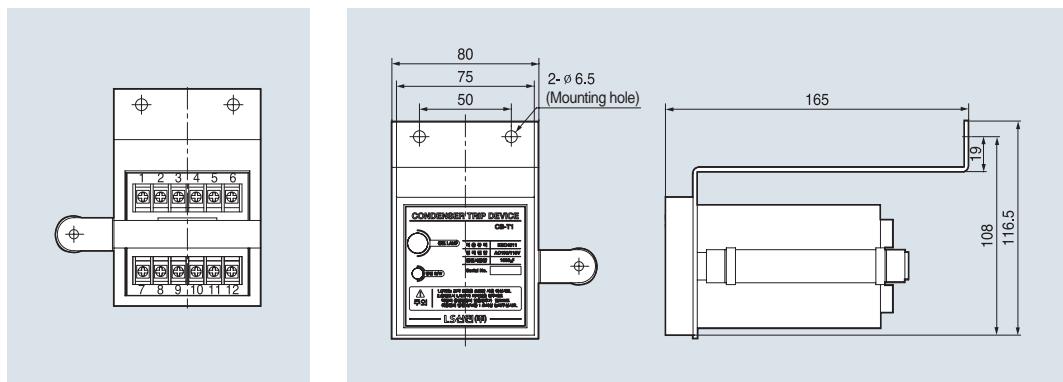

Circuit diagram

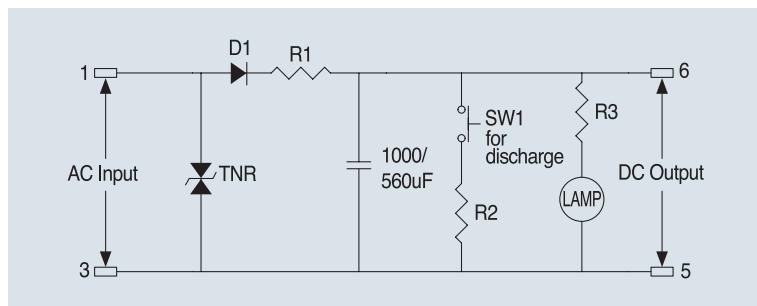

UVT Time delay: UDC

Installed outside of a breaker as an option



- UVT time delay, UDC is to delay the trip signal from UVT.
- Without UDC the breaker will be tripped instantaneously by the trip signal from UVT installed inside of the breaker even in the the momentary power failure.
- UDC can delay the trip time to avoid this unintended instantaneous trip in the event of such power failure.
- It can be installed on the cradle or inside of the switchgear.
- UDC provides output contacts for indication of trip status due to the UVT coil inside of the breaker.
b contact is closed at normal state and a contact is closed at trip.

1. Characteristics


Rated voltage (Vn)		Opration voltage range (V)		Consumption (VA or W)		Time delay (ms)
DC (V)	AC (V)	Pick up	Drop out	Inrush	Steady - state	
48-60	48	0.65~0.85 Vn	0.4~0.65 Vn	200	≤ 5	0.5, 1, 1.5, 3
100~130	100~130					
200~250	200~250					

- Operating voltage ranges are based on the minimum value of each rated voltage (Vn)

2. Ratings of output contacts

Rated voltage (V)	Rated current (A), Resistive load	Max. switching voltage (A)	Max. switching current (A)
24V DC	≤ 12	110V DC 250V AC	15
120V AC	≤ 12		
250V AC	≤ 10		

3. Wiring diagram

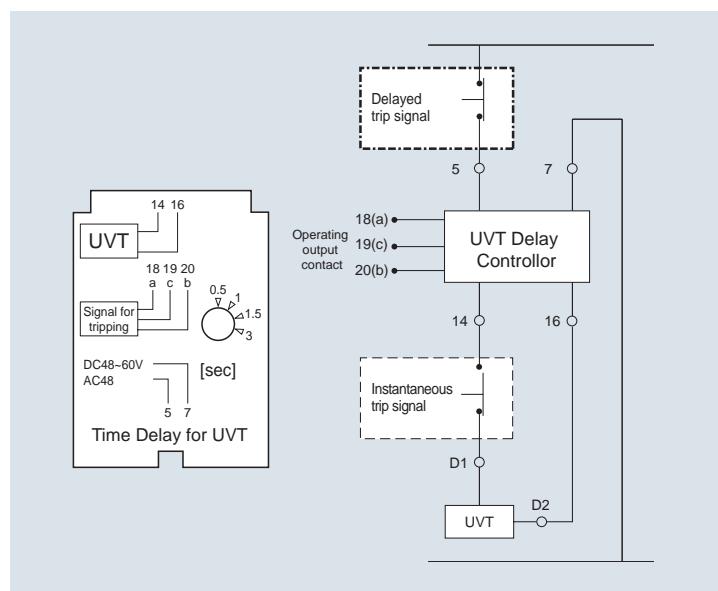


Accessory

Susol

Temperature sensor and monitoring unit: TM

Installed outside of a breaker as an option




VL/VH type (7.2kV 20/25kA 630A~)

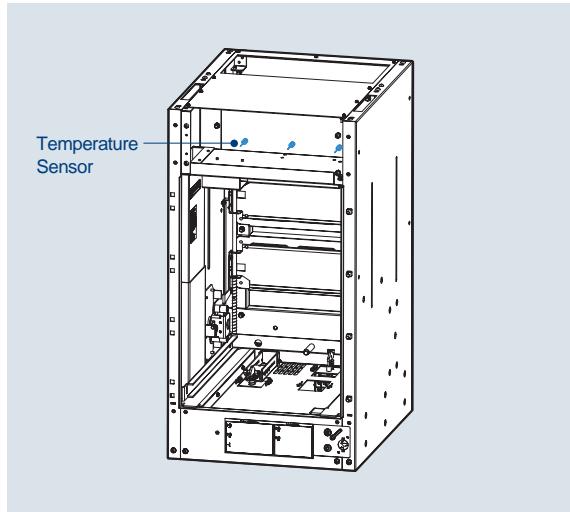

- Temperature Alarm Unit displays the input temperature detected through the temperature sensor installed in H-type cradle.
- Temperature sensor can be installed up to three (R, S, T phase).
- Temperature Alarm Unit converts the temperatures detected from the sensor in the cradle and displays the maximum value and can transmit it through communication.
- If the input temperature is above standard it may cause alarm.
Temperature Alarm Unit supports Modbus/RS-485 communication and contact us Profibus-DP communication.



Temperature sensor and monitoring unit

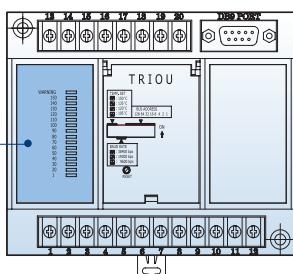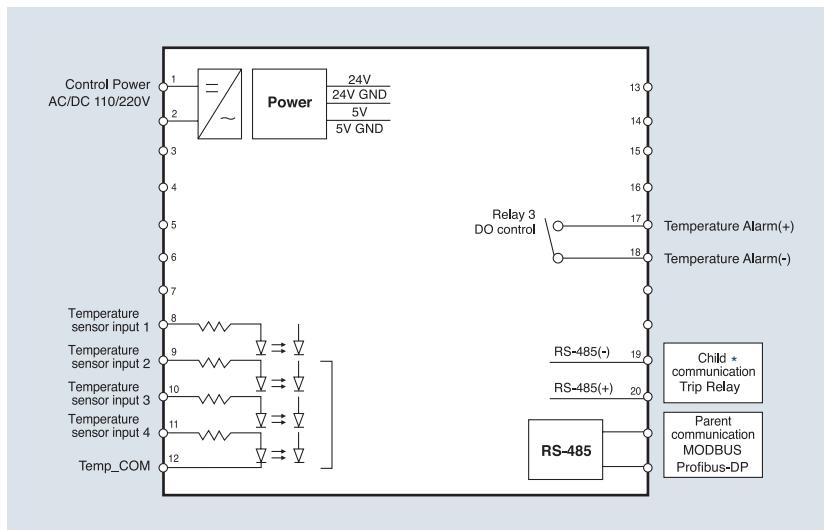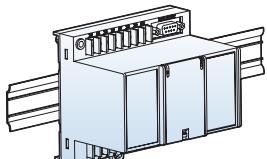



LED temperature display (°C): 10 ~150°C,
Warning
Display maximum value of temperatures



Earthing Switch: A1

Built-in a cradle as an option

VL/VH type (7.2kV 20/25kA 630A~)

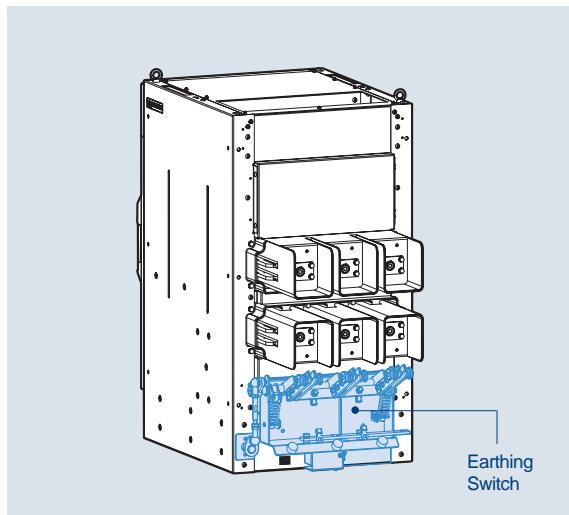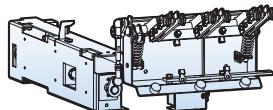


- For the safety during the maintenance of switchgear in the position of TEST/Drawout discharge the charging current in the load side of a VCB with this earthing switch.
It is available only for H type drawout breaker.

* Regarding the operations of earthing switch and related accessories see the instruction manual.
* Applicable Standards: IEC 62271-102


Position switch for Earthing Switch : A2, A4

Built-in a cradle as an option

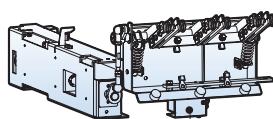

Position switch for E/S

Circuit diagram

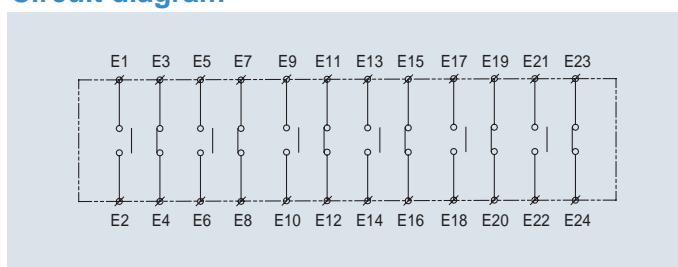


Accessory

Susol

Keylock for Earthing Switch: A5

Built-in a cradle as an option



- In case of using earthing switch it can be added for two types of interlocking.
 - 1) Interlock to keep opening
 - 2) Interlock to keep earthing




Locking magnet for Earthing Switch : A6~AD

Built-in a cradle as an option





- In case of using earthing switch it can be added to prevent the earthing switch from opening or earthing before it is energized.
- Verify if the locking magnet is energized before opening or earthing the earthing switch.
- Control voltage
 - DC 24V / DC 48V / DC 110V / DC 125V / DC 220V
 - AC 48V / AC 110V / AC 220V

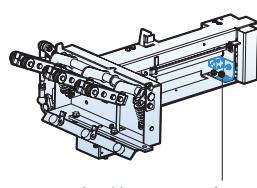

Shutter padlock: AE

Built-in a cradle as an option

VL/VH type (7.2kV 20/25kA 630A~)

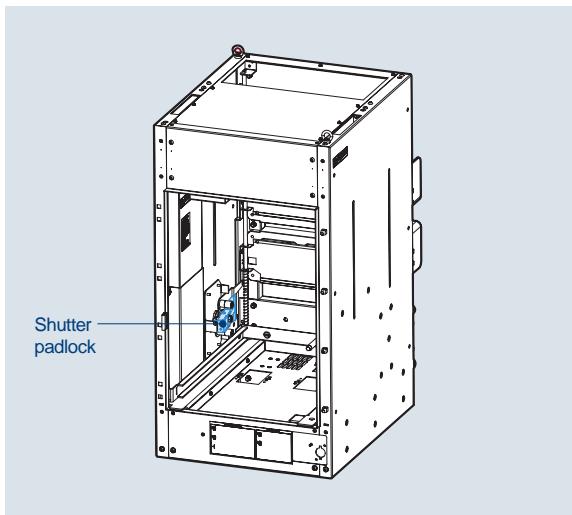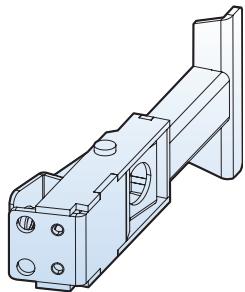


- It is the locking device to lock the primary and secondary shutter in closed state for safety while the breaker is drawn out for maintenance.
- When the breaker is drawn in, the shutter is automatically opened.
- There is a hole for padlock to lock the shutter.
- It can be applied only to H type cradle.


Truck operated cell switch (TOC: AF)

Built-in a cradle as an option


VL/VH type (7.2kV 20/25kA 630A~)



VL type




VH Type

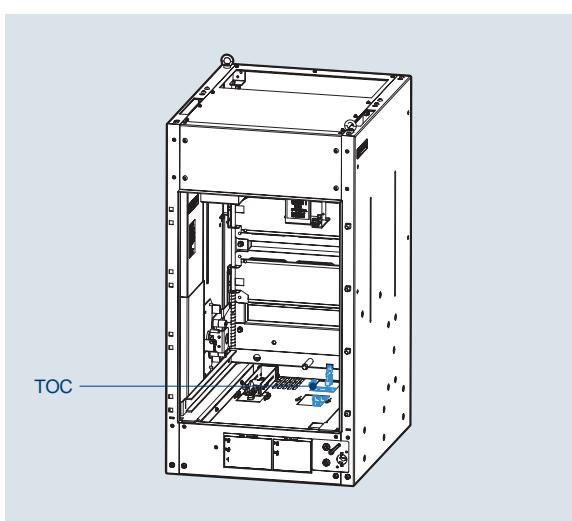

- This auxiliary switch is used to indicate the 'SERVICE' position of VCB. It is installed in the bottom of a H type cradle and operated by the frame of a breaker.
- TOC is consisted of 4 cell switches with changeover contacts as below diagram.

Circuit diagram

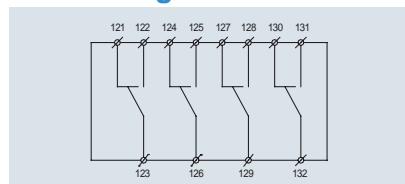

a Contact: 122-123, 125-126, 128-129, 131-132,

b Contact: 121-123, 124-126, 127-129, 130-132


Accessory

Susol


Mechanical Operated Cell Switch (MOC: AG)

Built-in a cradle as an option


VL/VH type (7.2kV 20/25kA 630A~)



VL type

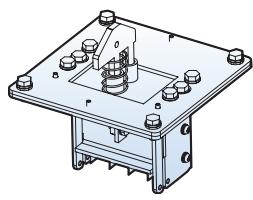


VH Type

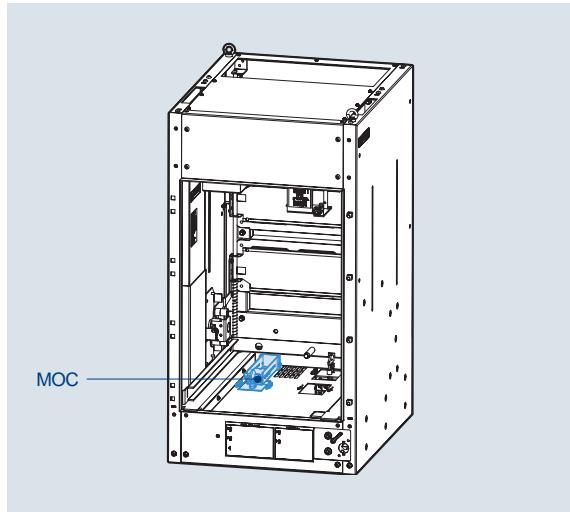

- This auxiliary switch is used to indicate the Close/Trip of VCB. It is operated mechanically at the SERVICE position and installed in the bottom of a H type cradle and operated by the frame of a breaker.
- MOC is consisted of 4 cell switches with changeover contacts as below diagram.

Circuit diagram




a Contact: 101-103, 104-106, 107-109, 110-112,

b Contact: 102-103, 105-106, 108-109, 111-112

Door: AH

Built-in a cradle as an option

VL/VH type (7.2kV 20/25kA 630A~)

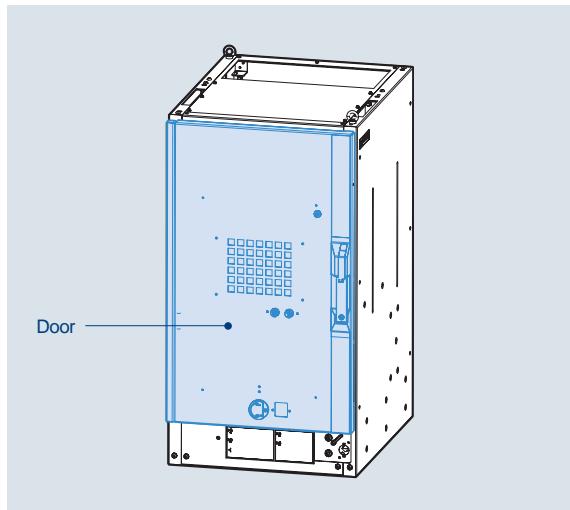


- It is outside door for H type cradle.
- Accessories are available for the door.

Door Interlock: AJ

Built-in a cradle as an option

VL/VH type (7.2kV 20/25kA 630A~)

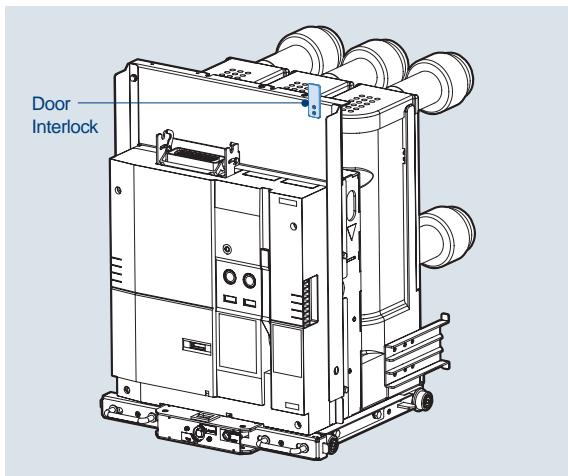


- When the Door is installed to H type cradle, this door interlock prevents opening it at SERVICE position.

Door Emergency Push button: AK

Built-in a cradle as an option

VL/VH type (7.2kV 20/25kA 630A~)

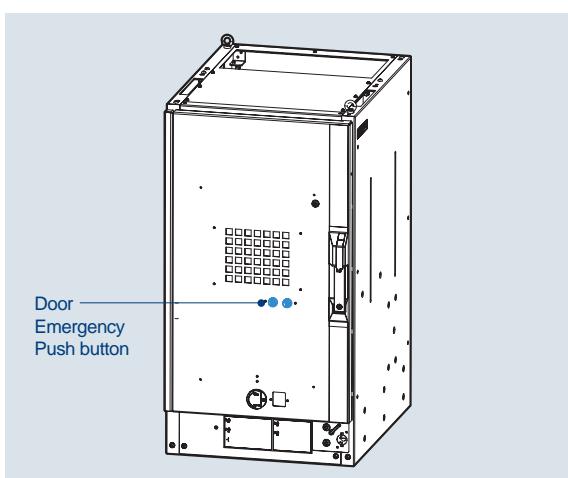

- It is used to enable the Close/Trip of the breaker manually from outside of the door installed to H type cradle during an emergency.
- Push the ON/OFF button by ON/OFF handle supplied separately.


Accessory

Susol

Temperature Sensor: AC

Built-in a cradle as an option

VL/VH type (7.2kV 20/25kA 630A~)

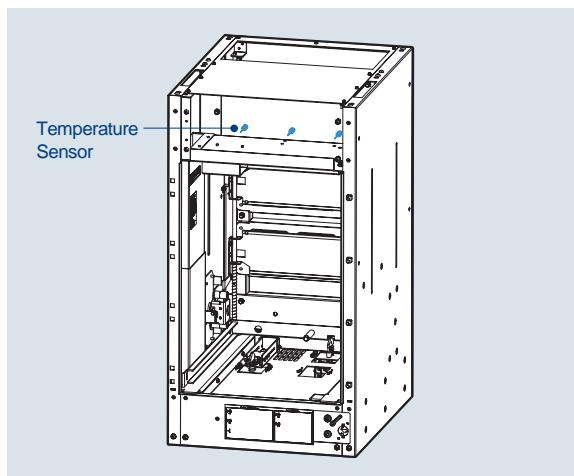


- This sensor is used to detect the temperature in H-type cradle combined with Temperature monitoring unit.
- It can be installed up to three (R, S, T phase).

Racking In/Out handle

Susol VCB offers various kinds of handle suitable for each use of types and models. The order can be proceeded with the code below and ordering quantity is flexibly adjustable.

Type	Cradle	Racking in/out handle	Charging handle	Operating handle for earthing S/W
VL-06 □ 08,13	E	55223171101	Not required	-
	F			
	G			
VL-06 □ 20,25	E	55213143005	Not required	-
	F			
	G			
VL-06 □ 20,25	A	55223172407	Not required	
	B	55223172403		
VH-06,12,17, 24,35,36 □	H K	55223172405	55213143006	
		55223172406		


Racking in/out handle for H, K cradle

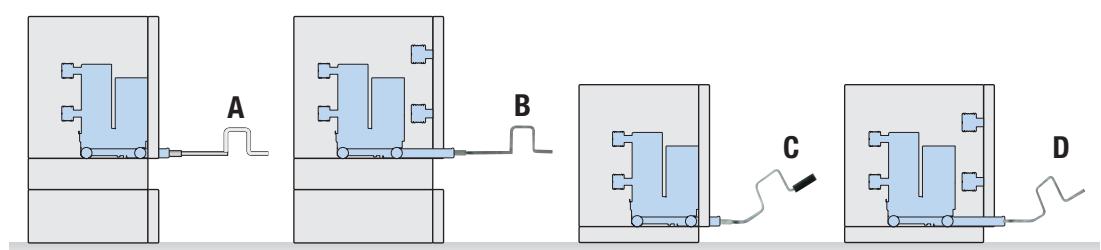

Type H Cradle Lead Wire: AM~AO

Built-in a cradle as an option

VL/VH type (7.2kV 20/25kA 630A~)

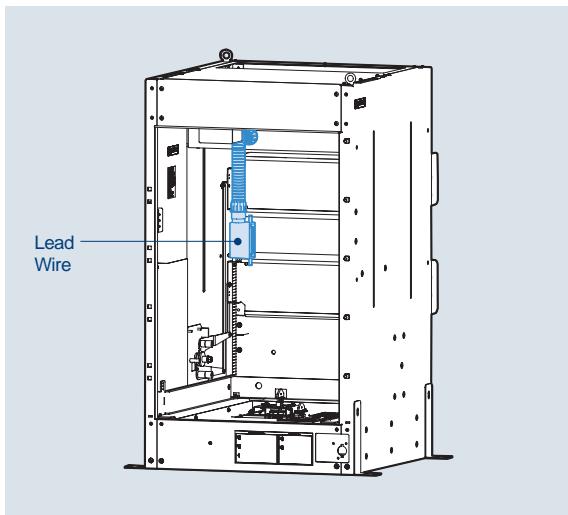


- In case of H type breaker of VL and VH models the Lead wire is installed in the cradle when supplied.
- 4a4b or 10a10b contacts are selectable according to the auxiliary contact of the breaker. Flame retardant cable is used for 4a4b.

Door Padlock

Built-in a cradle as an option

VL/VH type (7.2kV 20/25kA 630A~)

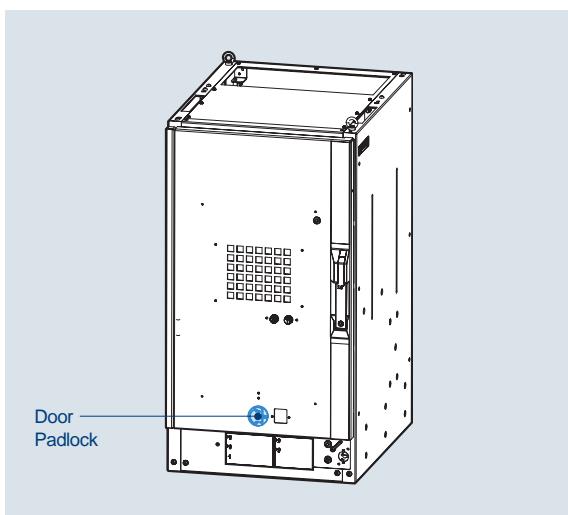

- It is supplied with a door for H type cradle as standard.
- It can be locked by separate padlock to prevent entering the manual handle.

Accessory

Susol


Auxiliary guide frame



- Auxiliary guide frame is provided in order to move safely 36kV breaker into the switchgear.
- It can be used in combination with the hand pallet which meets the requirement shown below.



Applicable hand pallet

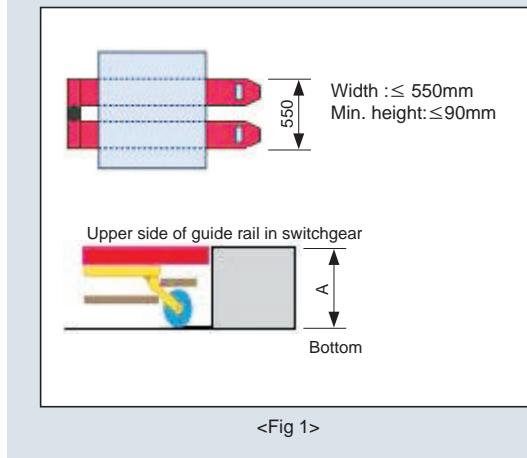

<Fig 1>




If dimension A in Fig. 1 is less than 120mm B type pallet can be used.
In case of more than 120mm C type must be applied.



Control circuit diagram - VL type


Susol

VL-06

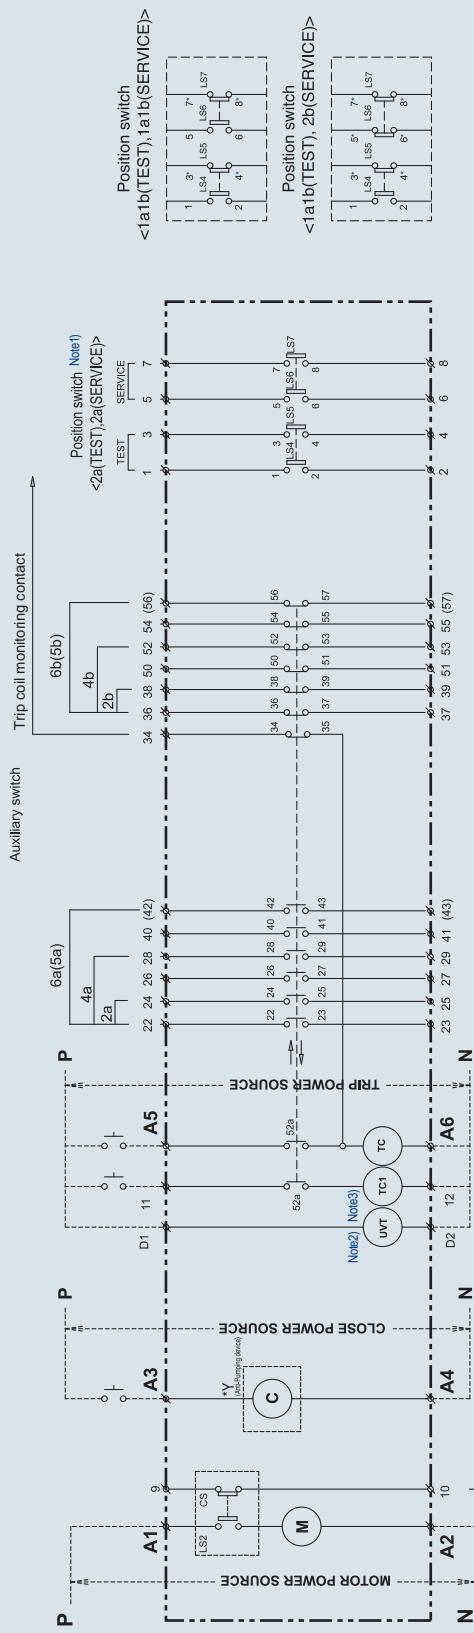

Closing Spring Contact(Charge completion indicating contact)

<Connecting terminal arrangement>

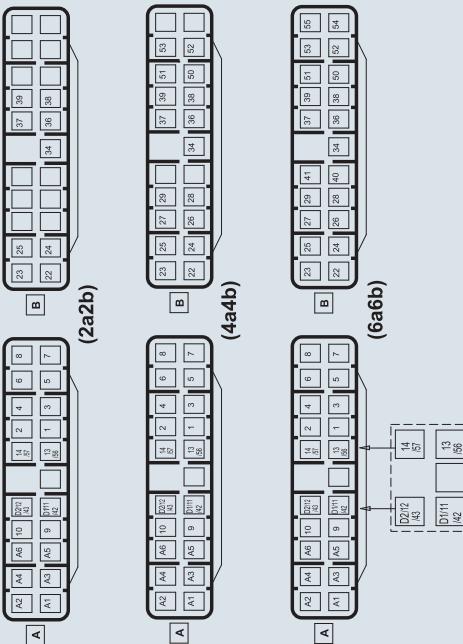

LS2: Motor stop, close spring charged indication limit switch

LS4, LS5: Position SW (close in TEST position)

LS6, LS7: Position SW (close in SERVICE position)

S/W No.	TEST : 1a1b		TEST : 2a		TEST : 1a1b	
	SERVICE : 2b	A3	SERVICE : 2a	A4	SERVICE : 1a1b	A5
LS4	Close at TEST position		Close at TEST position		Close at TEST position	
LS5	OPEN at TEST position		Close at TEST position		OPEN at TEST position	
LS6	OPEN at SERVICE position		Close at SERVICE position		Close at SERVICE position	
LS7	OPEN at SERVICE position		Close at SERVICE position		Open at SERVICE position	

Ø: External terminal of VCB

52: Vacuum circuit breaker

M: Spring charging motor

TC: Trip coil

TC1: Secondary trip coil

C: Close coil

UV/T: Under voltage trip

52a: Auxiliary switch (a)

52b: Auxiliary switch (b)

CTC: Current trip coil

CTC1: Secondary Current Trip Coil

CS: Closing spring charged Limit Switch

Y: Anti-Pumping Device
Anti-Pumping Device is installed inside
as standard IEC62271-100 3.6.12B

Note 1. Position SW : TEST 2a, SERVICE 2a (Terminal No. : 1, 2, 3, 4, 5, 6, 7, 8)

-TEST position 1a1b, SERVICE position 1a1b/2b are available
(marked contact is b contact)

2. UV/T: Under Voltage Trip (Terminal No. : D1, D2)

3. TCI : Secondary Trip Coil (Spare trip coil, Terminal No. : 11, 12)

4. CTC : Current Trip Coil (Terminal No. : A5, A6) — 11, 12 —

CTC1 : Secondary Current Trip Coil (Terminal No. : 11, 12)

5. Close and trip coil is One Pulse type, excluding trip coil (DC110/220V)

6. In above optional accessories, UV/T, CTC and TCI can not be selected simultaneously

7. UV/T, TC1 are selected. Maximum auxiliary switch is 44b

8. Above circuit diagram is based on OFF status of VCB and closing spring is charged

9. Please make sure that keep the direction of PN on this circuit diagram

*: Anti-pumping device

In case the closing coil(C) becomes permanently energized, the circuit breaker remains in the open position after it has been opened, either by manual or electrical operation. The circuit breaker can be closed only if the closing coil(C) is momentanely de-energized.


Option

—

Control circuit diagram - VL type

Susol


VL-06/12/17/20/25/36

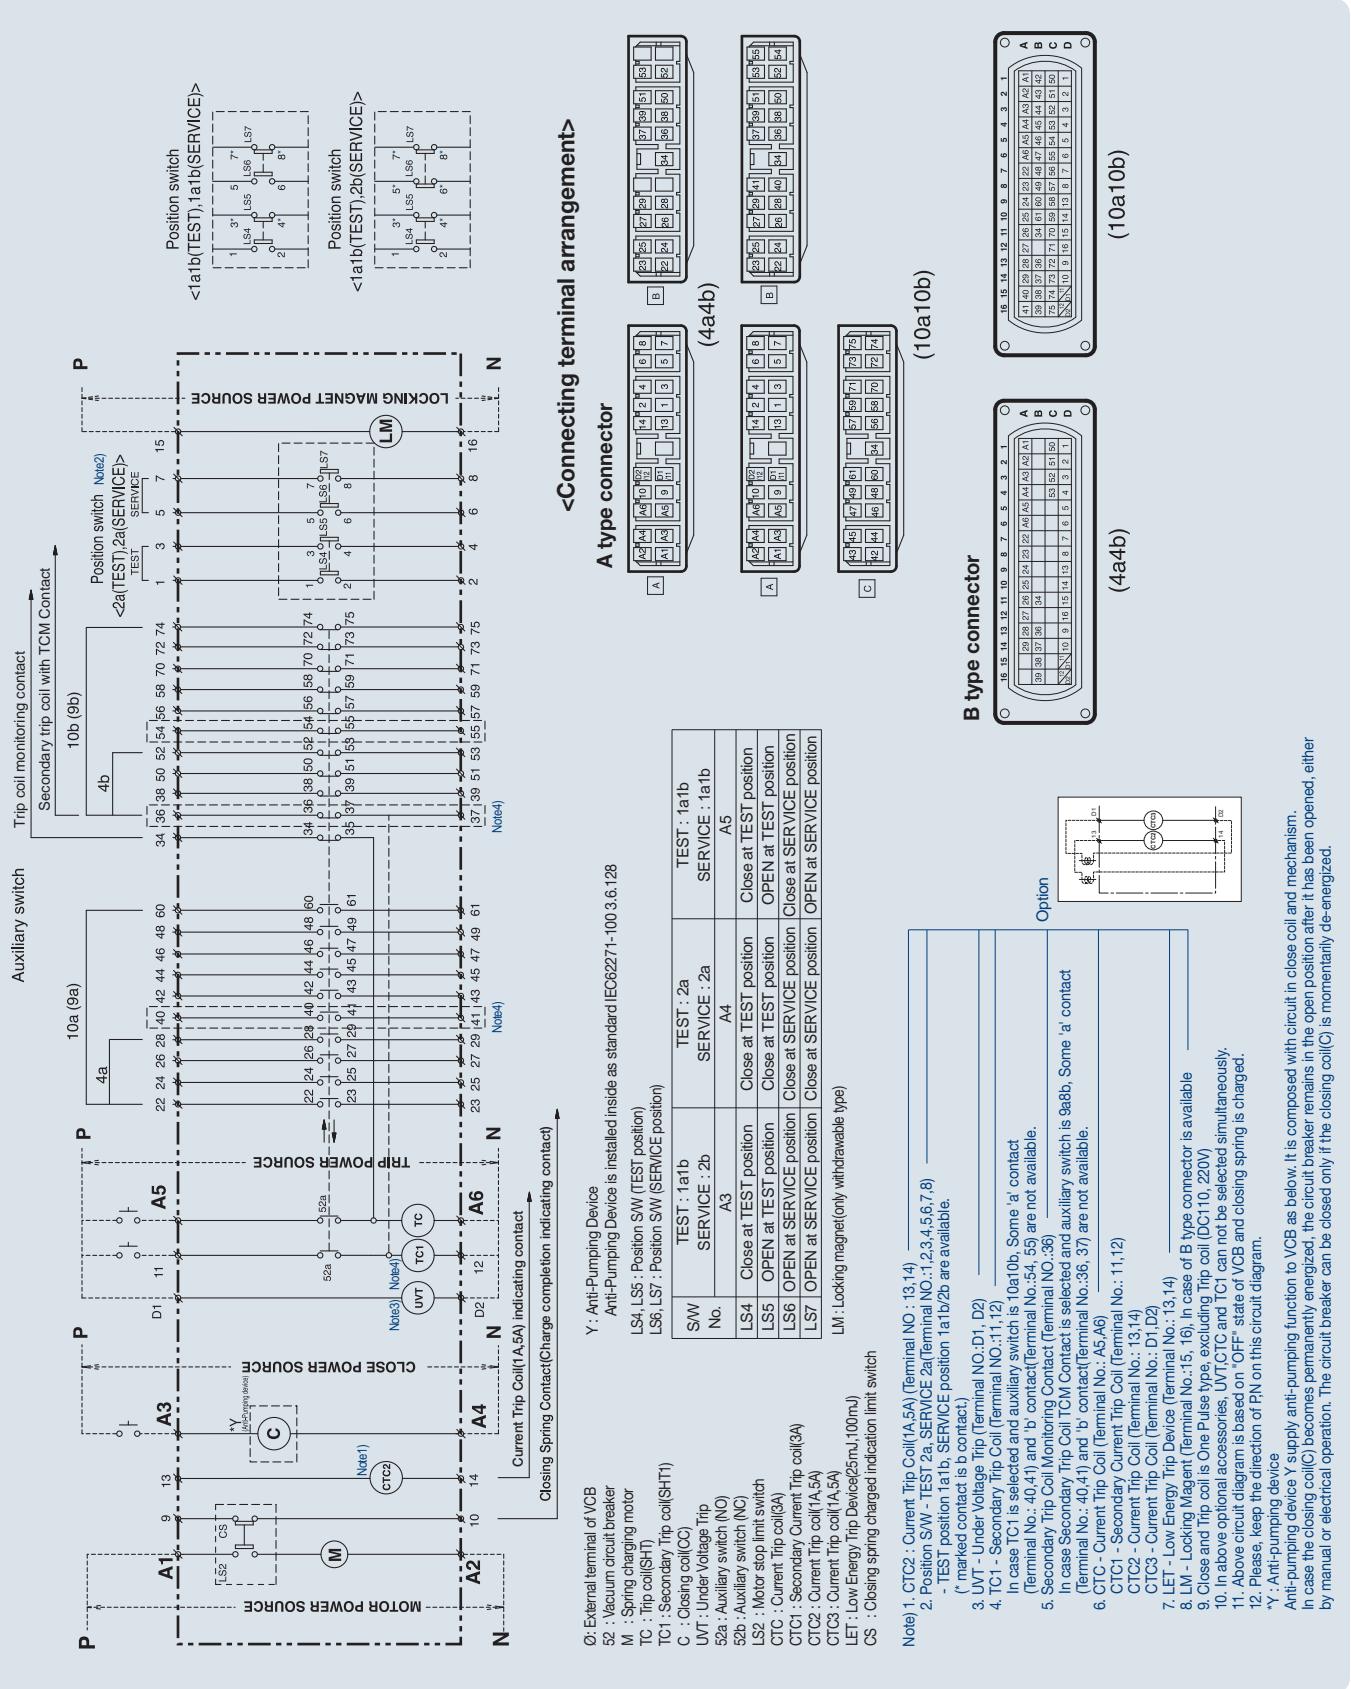



Control circuit diagram - VH type

Susol

VH-06/12/17/20/25/36

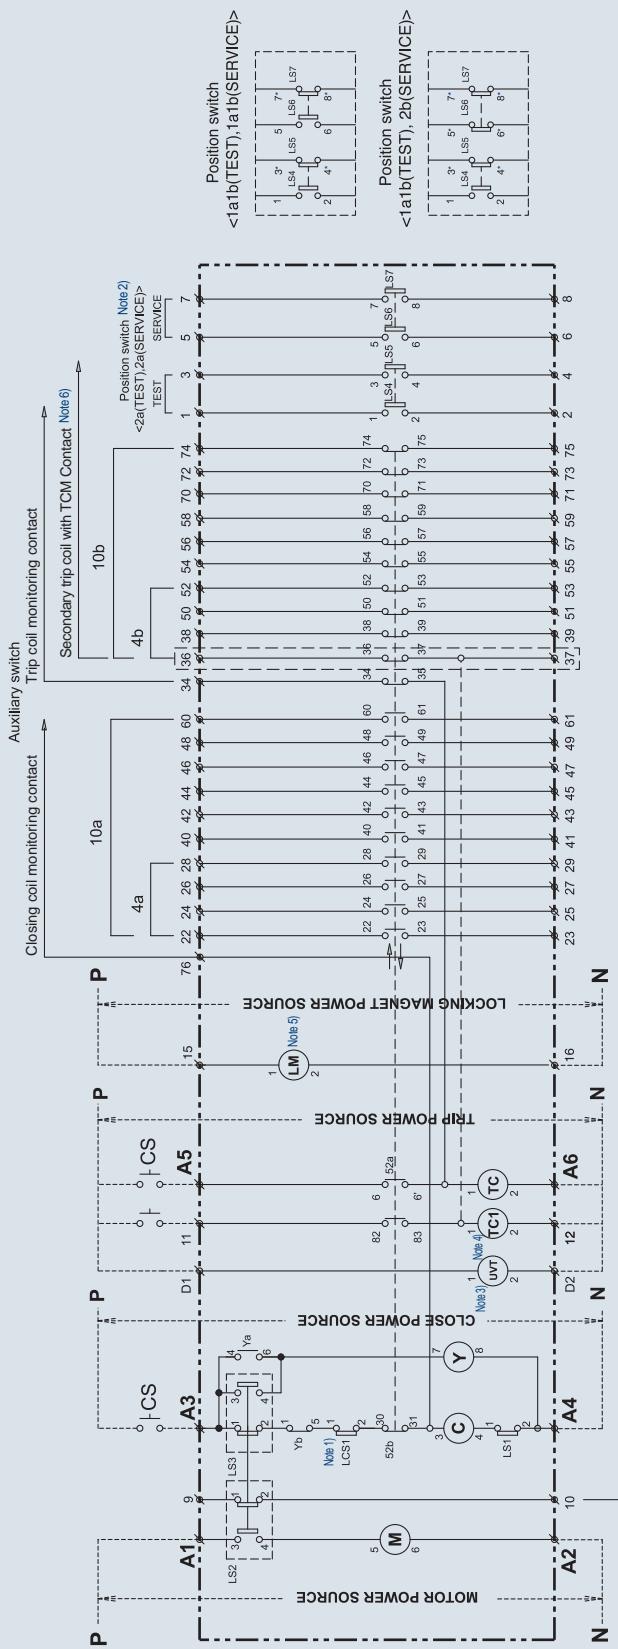

<Connecting terminal arrangement>

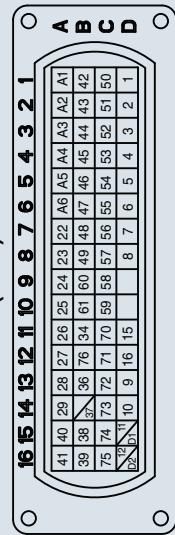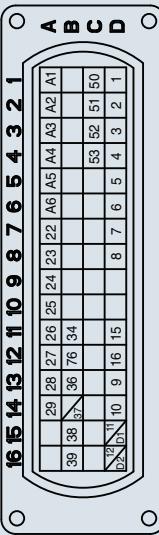

(10a)
(10b)

SW No.	TEST : 1a1b	TEST : 1a2	TEST : 1a1b
SW No.	SERVICE : 2b	SERVICE : 2a	SERVICE : 1a1b
52a: Auxiliary switch (a)	Close at TEST position	Close at TEST position	Closes at TEST position
52b: Auxiliary switch (b)	Open at TEST position	Open at TEST position	OPEN at TEST position
L51: Close interlock limit switch (only withdrawable type)	Open at SERVICE position	Close at SERVICE position	Close at SERVICE position
L52: Motor stop, close spring charged indication limit switch	Open at SERVICE position	Close at SERVICE position	OPEN at SERVICE position
LM: Locking magnet (only withdrawable type)			

Note) 1. LCS1 : Latch Checking Switch
2. Position S/W - TEST 2a, SERVICE 2a(Terminal No. 1, 2, 3, 4, 5, 6, 7, 8)

1a1b at TEST position and 1a2 at SERVICE position are also available.
(In case of 1a1b *marked contact is b - normally open contact)

3. UVT - Under Voltage Trip (Terminal No. D1, D2)

4. TC1 - Secondary Trip Coil (Spare trip coil, terminal No. 11-12)

5. LM - Locking Magnet (terminal No. 15, 16), Type H only withdrawable type.

6. Secondary Trip Coil monitoring contact (Terminal No. 36)

b contact(36, 37) is not available if Trip Coil monitoring contact is applied to Secondary Trip Coil.

7. Above options TC1 and UVT can not be used simultaneously.

8. LS1(closing-interlock limit-switch) is not available for fixed version

9. Above circuit diagram is based on 'OFF' status of VCB and closing spring is charged.


10. Please make sure that keep the direction of P, N on this circuit diagram.

Option

Control circuit diagram - VH type

Susol

Compartment

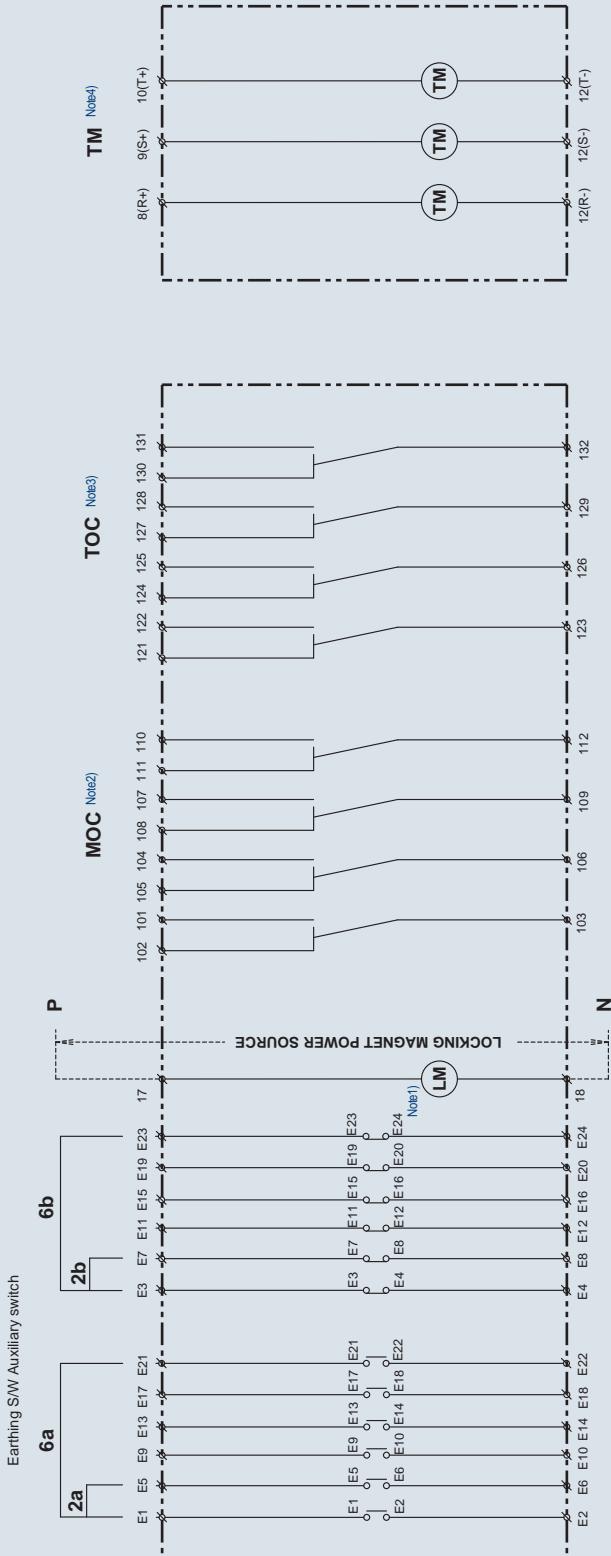

- ∅: External terminals for auxiliary contacts and locking magnet
- LM : Locking magnet for earthing switch
- MOC : Mechanism operated cell switch (for H type cradle)
- TOC : Truck operated cell switch (for H type cradle)
- TM : Temperature alarm (for H type cradle)

(Note) 1. LM - If it is energized with the rated power the earthing switch can be closed or opened (for H type cradle)

2. MOC - This auxiliary switch is used to indicate the Close/Open of VCB (for H type cradle)

It is composed of 4 cell switches with 4 changeover contacts.

3. TOC - This auxiliary switch is used to indicate the SERVICE position of VCB (for H type cradle)

It is composed of 4 cell switches with 4 changeover contacts.

4. TM - Temperature Alarm Unit displays the input temperature detected through the temperature sensor installed in H-type cradle. Temperature sensor can be installed in each phase and can be connected with the temperature module.

5. Please make sure that keep the direction of P, N on this circuit diagram.

* Above circuit diagram is based on the status that the earthing SW is Open and the breaker is at Test or between Test and Service position. MOC indicates the Open of the breaker. If the breaker is Closed from Service, the contacts configuration is displayed on the contrary.

Option


Dimensions - VL type

VL-06


Susol

7.2kV, 8/12.5kA, 400/630A

Fixed (P type)

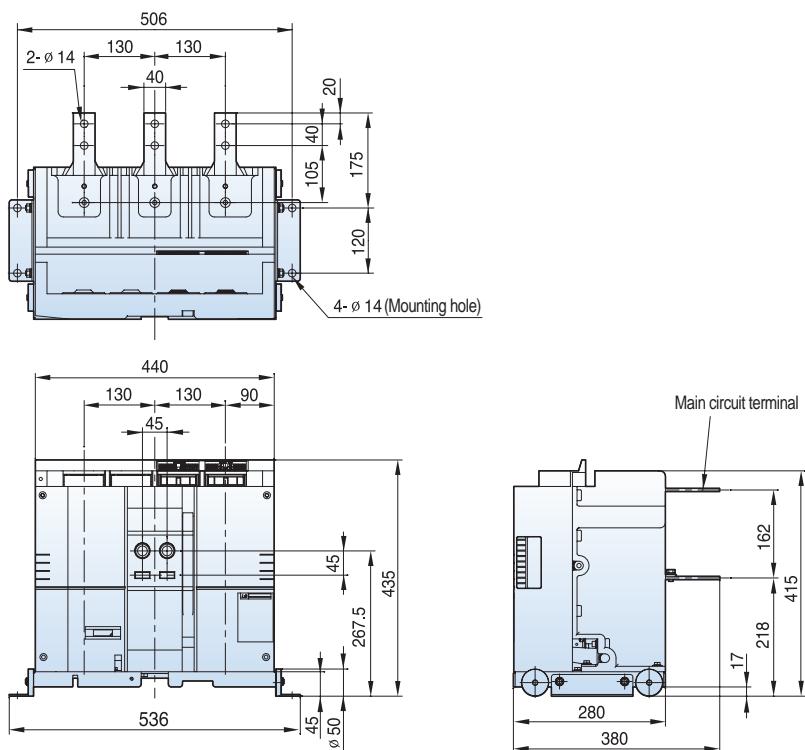

Withdrawable (Standard breaker E/F/G type)

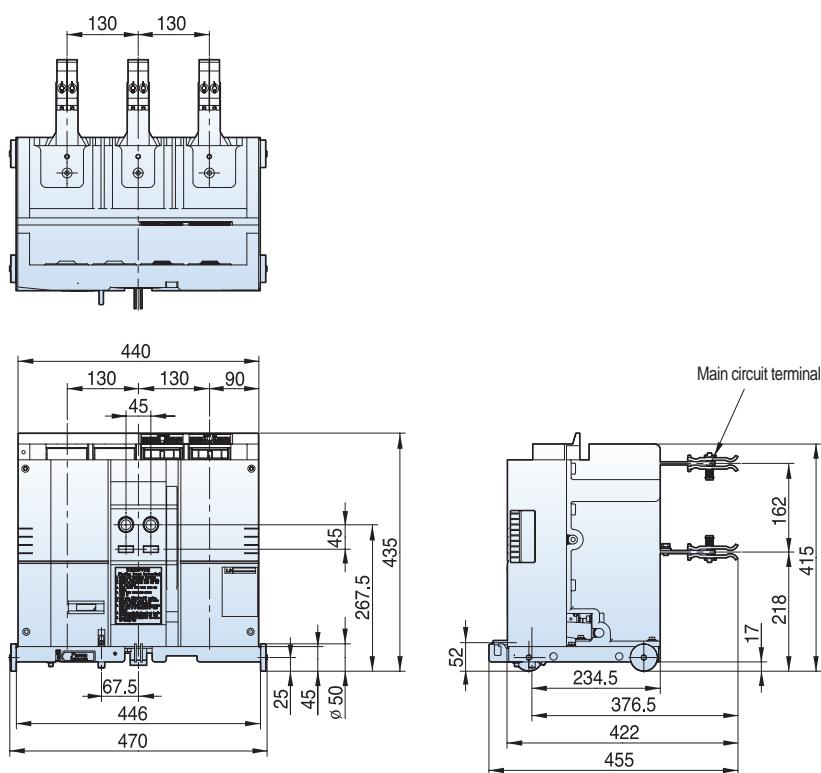


Dimensions - VL type


Susol

7.2kV, 8/12.5kA, 400/630A



Withdrawable (Compatible with existing breaker E/F/G type)

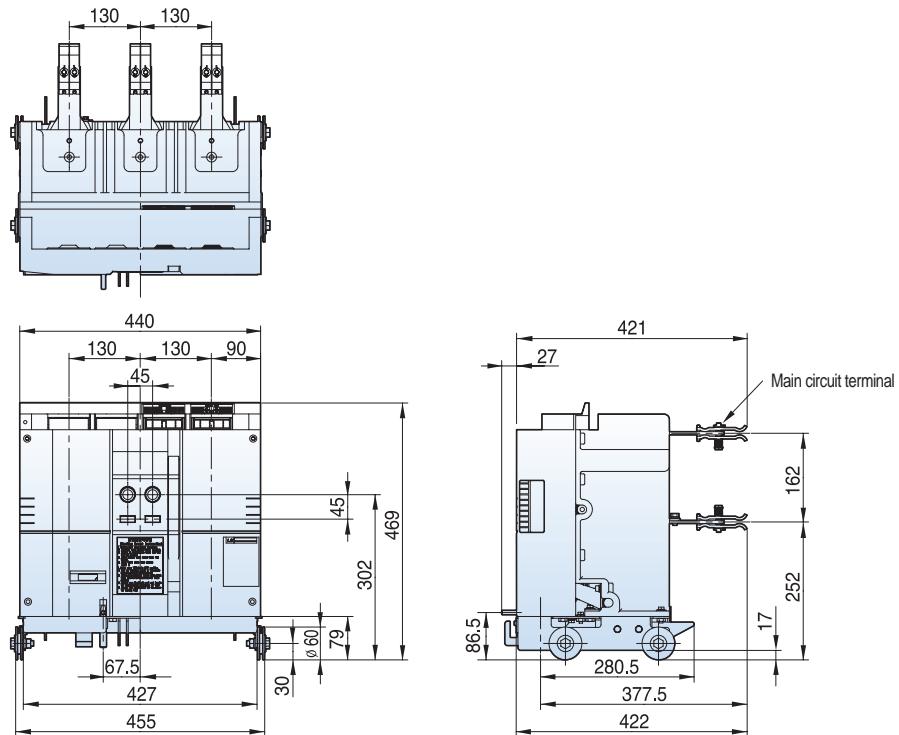

Withdrawable (E type cradle)

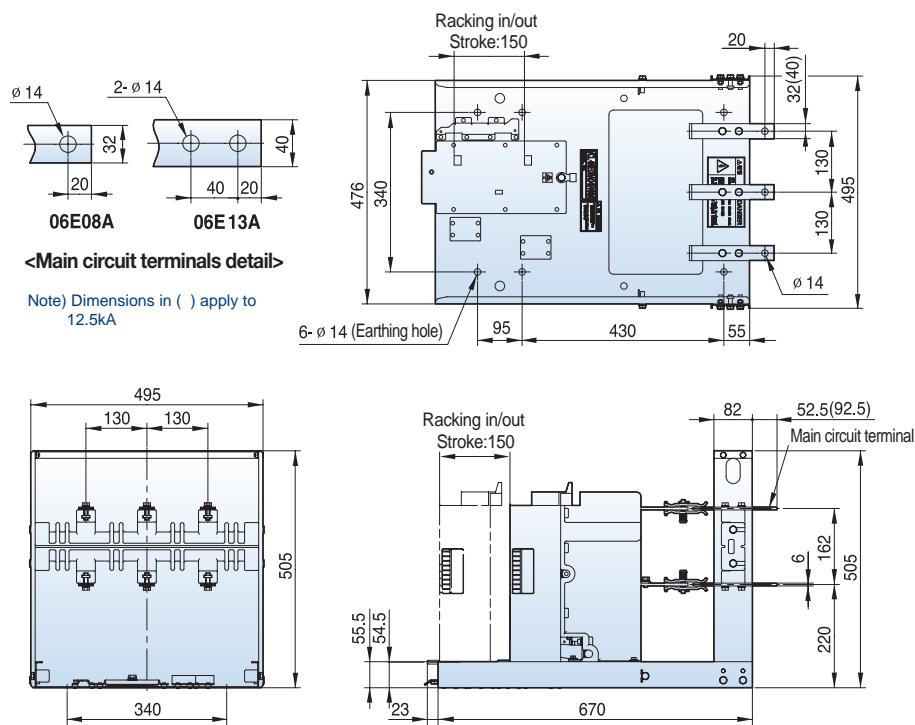

Susol

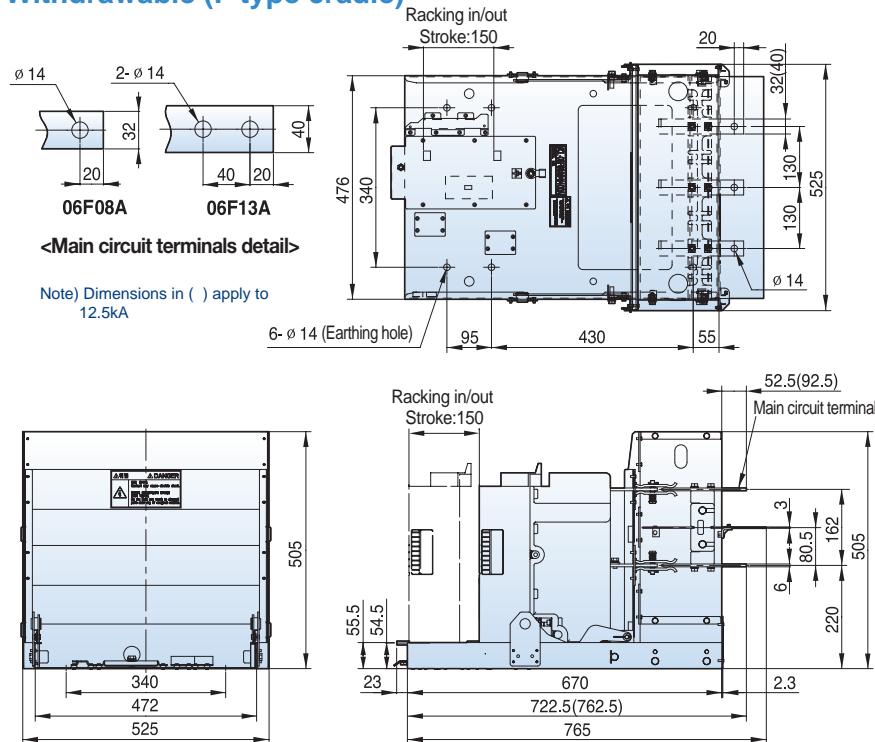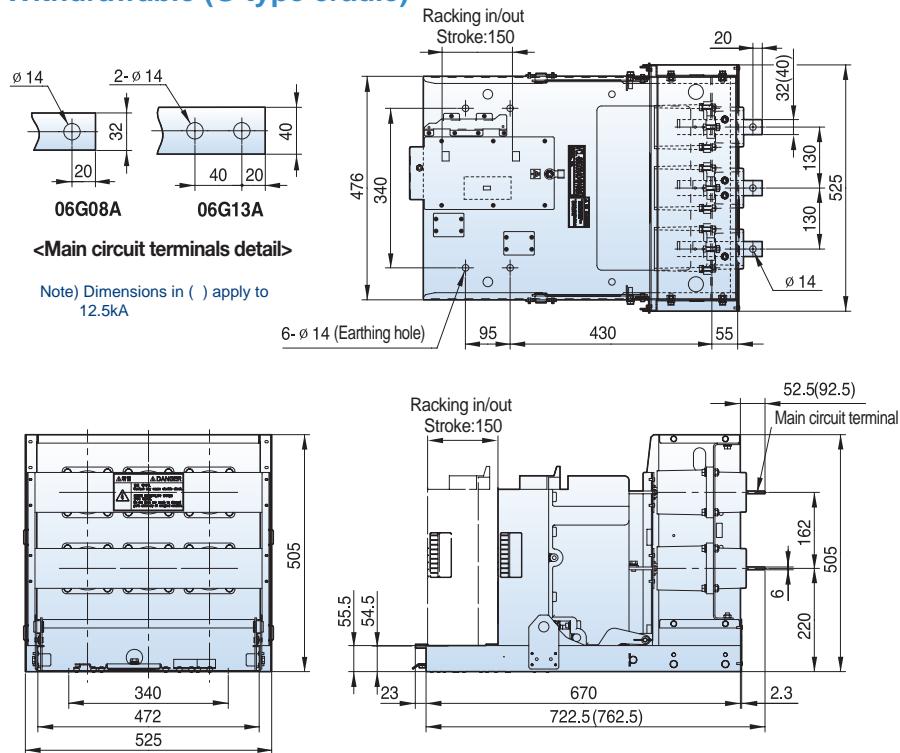
7.2kV, 8/12.5kA, 400/630A**Withdrawable (F type cradle)****Withdrawable (G type cradle)**

Dimensions - VL type


Susol




7.2kV, 20/25kA, 630/1250A

Fixed (P type, phase distance 150mm)



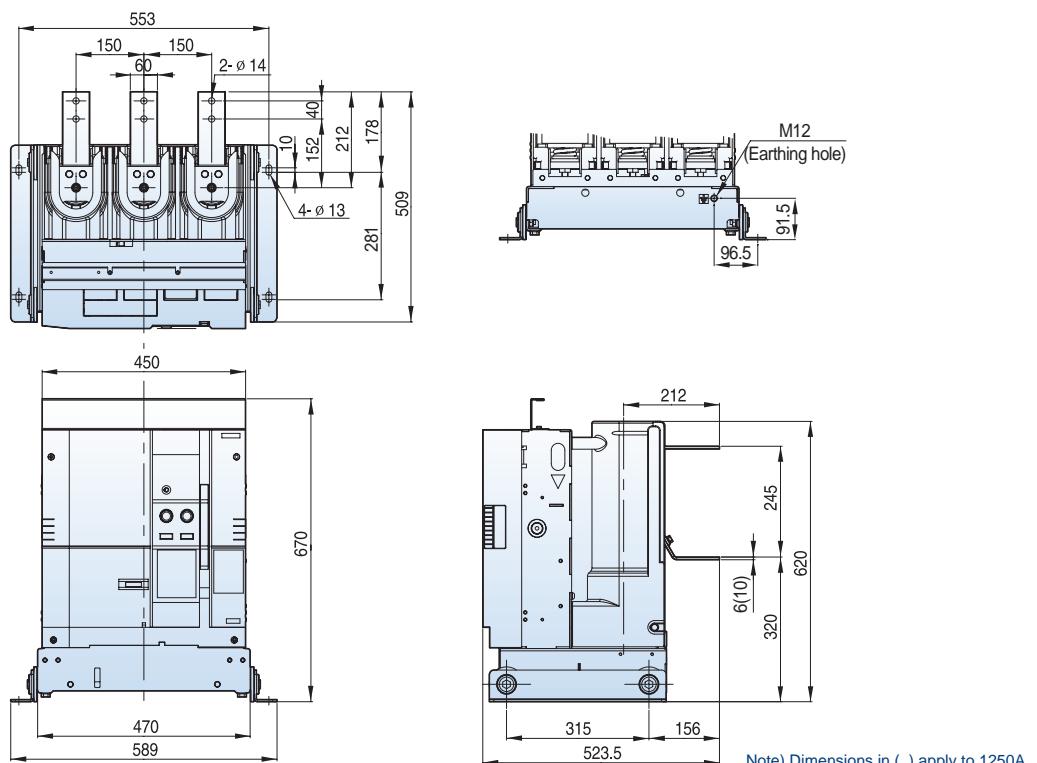


Withdrawable (E type unit, phase distance 150mm)

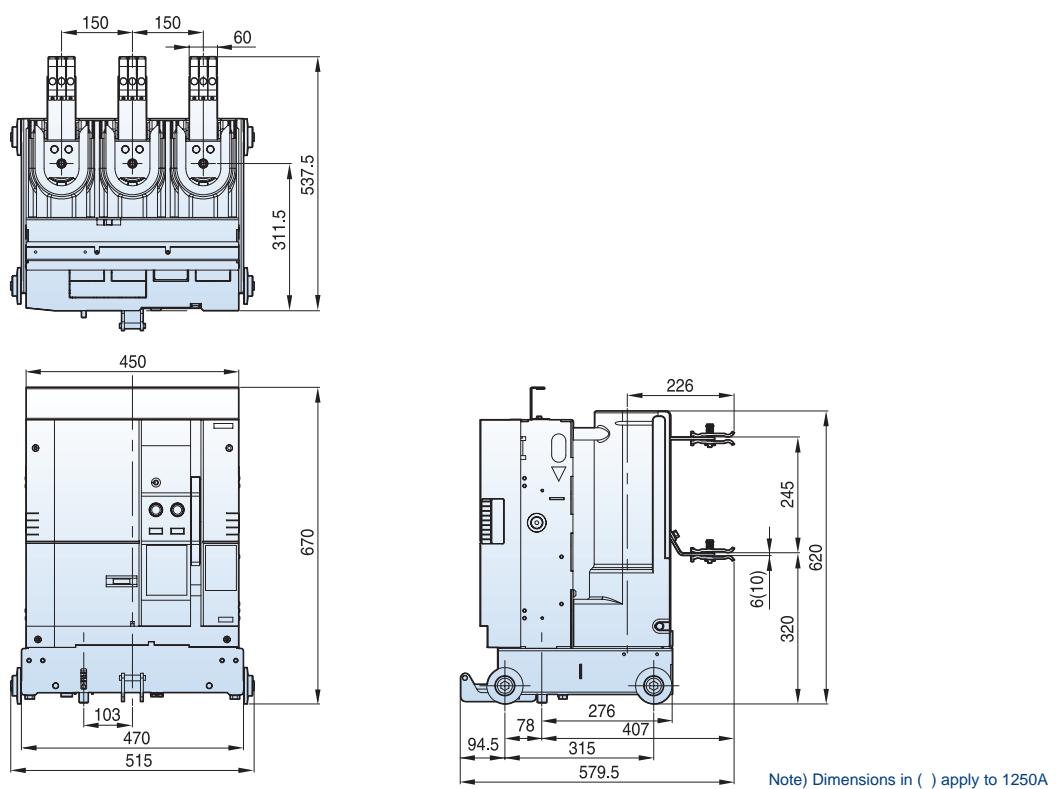

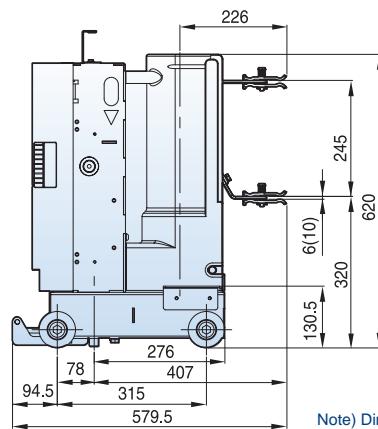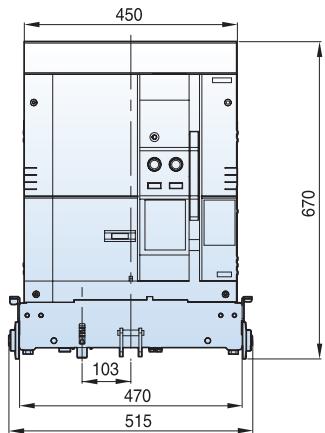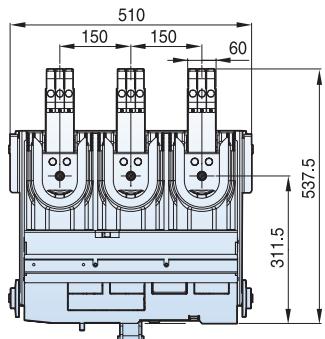Susol**7.2kV, 20/25kA, 630/1250A****Withdrawable (F type unit, phase distance 150mm)**

Note) Dimensions in () apply to 1250A

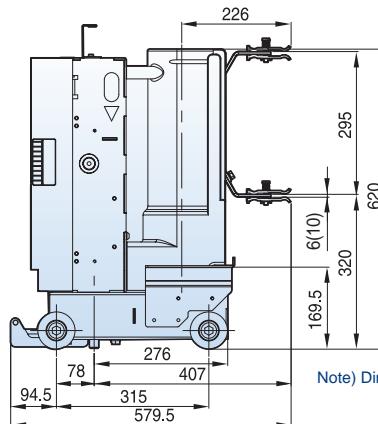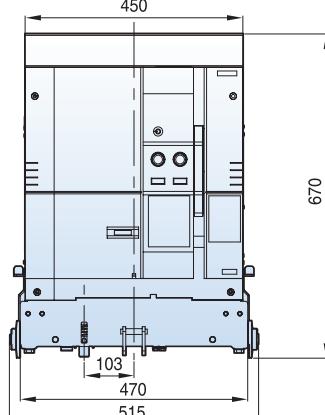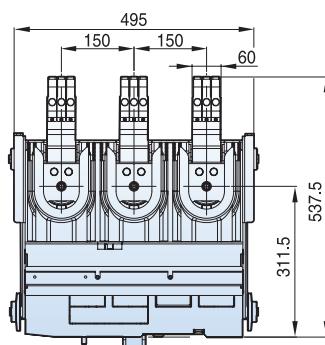Withdrawable (G type unit, phase distance 150mm)




Note) Dimensions in () apply to 1250A

Dimensions - VL type




Susol

7.2kV, 20/25kA, 630/1250A

Withdrawable (K type unit T type, phase distance 150mm)

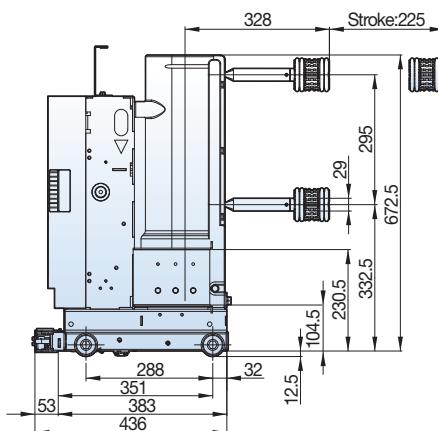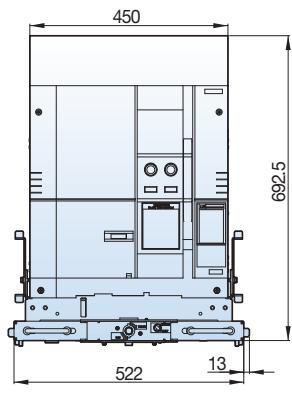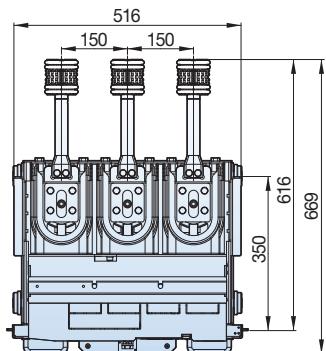


Withdrawable (K type unit T2 type, phase distance 150mm)

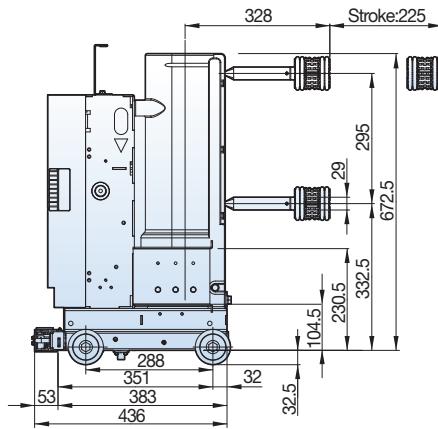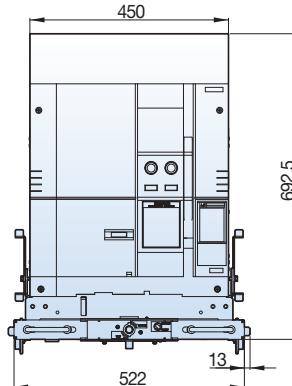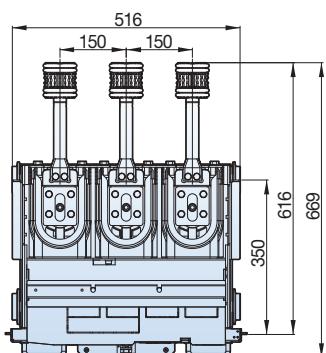

Susol

7.2kV, 20/25kA, 630/1250A**Withdrawable (E type cradle, phase distance 150mm)**


Rating	630A	1250A
A	6	10
B	55	60
C	95	90

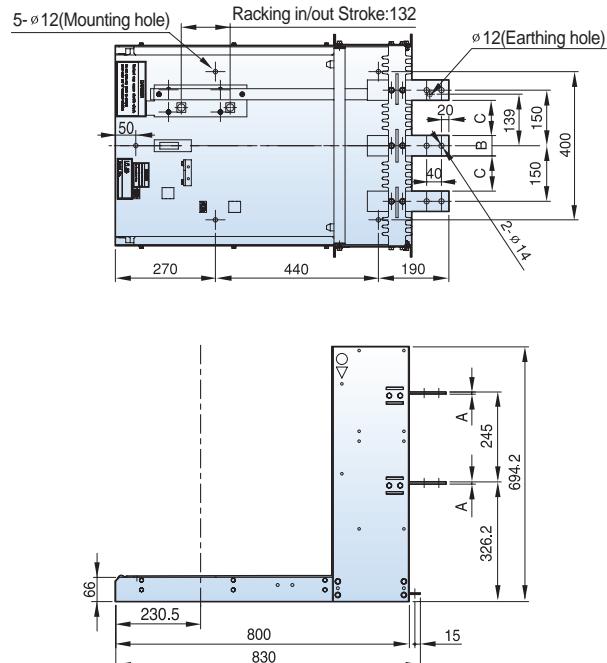

* Please be informed that the switchgear IP cover has to be back of —— mark.

Withdrawable (F type cradle, phase distance 150mm)

Rating	630A	1250A
A	6	10
B	55	60
C	95	90

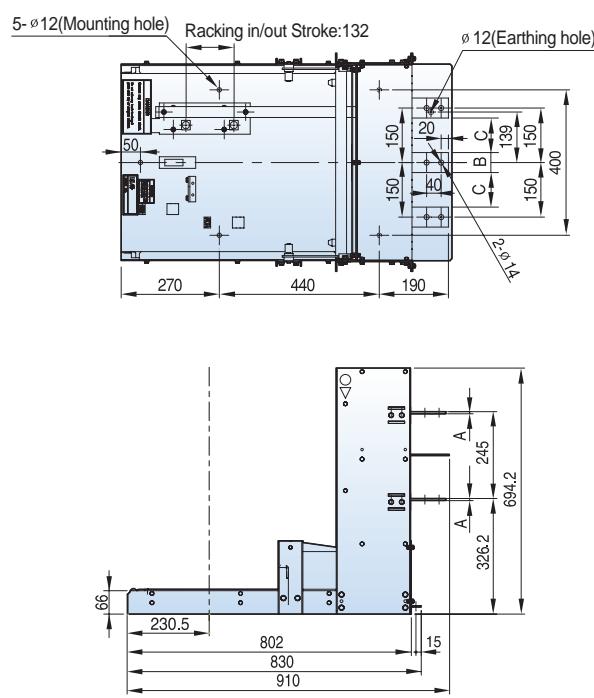


* Please be informed that the switchgear IP cover has to be back of —— mark.

Dimensions - VL type

Susol


7.2kV, 20/25kA, 630/1250A

Withdrawable (G type cradle, phase distance 150mm)

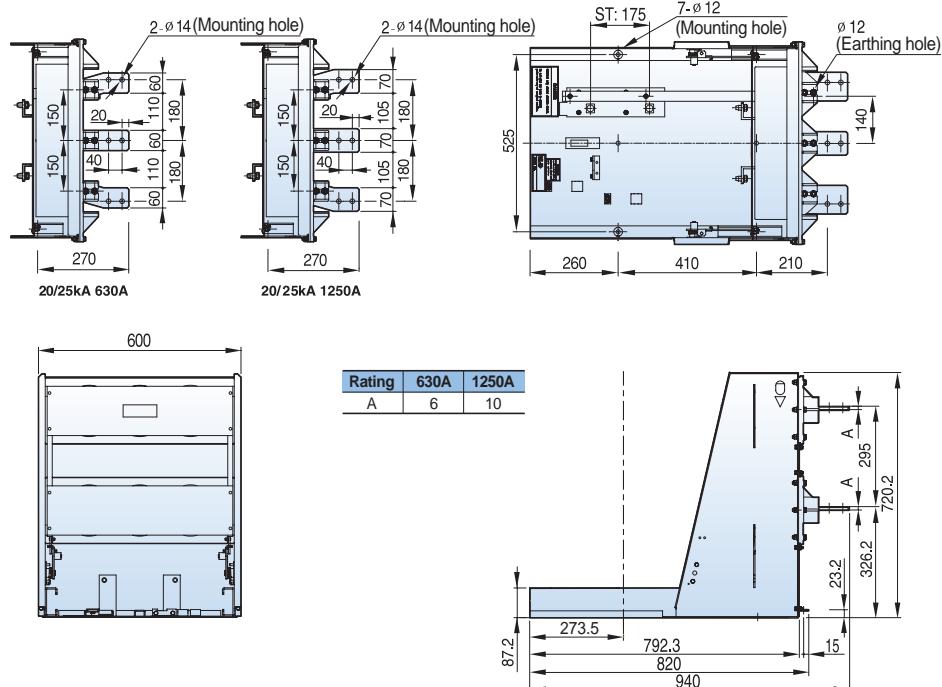


* Please be informed that the switchgear IP cover has to be back of —— mark.

Withdrawable (H type unit, phase distance 150mm)

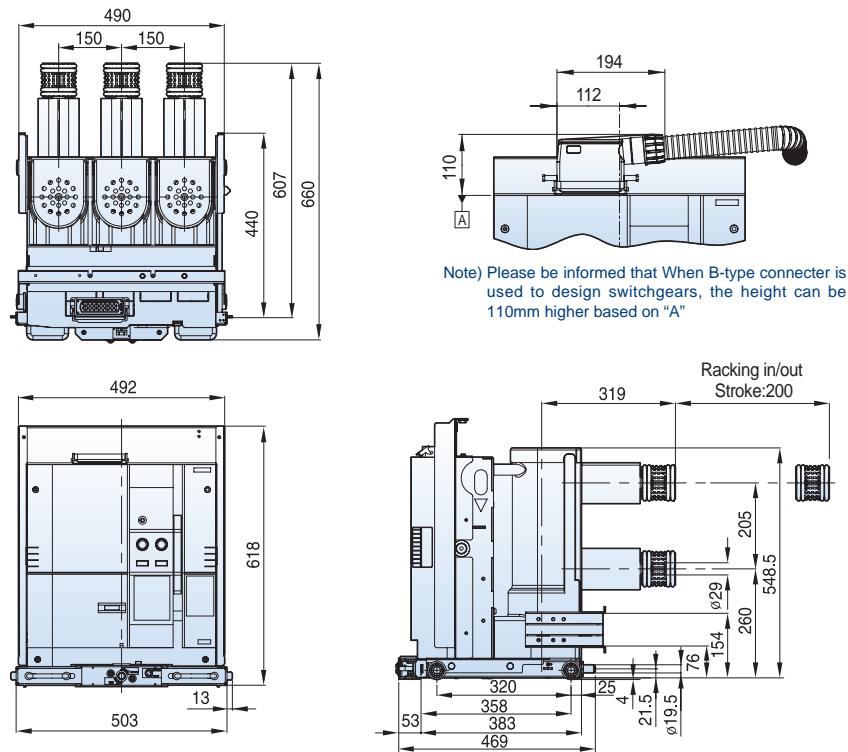

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

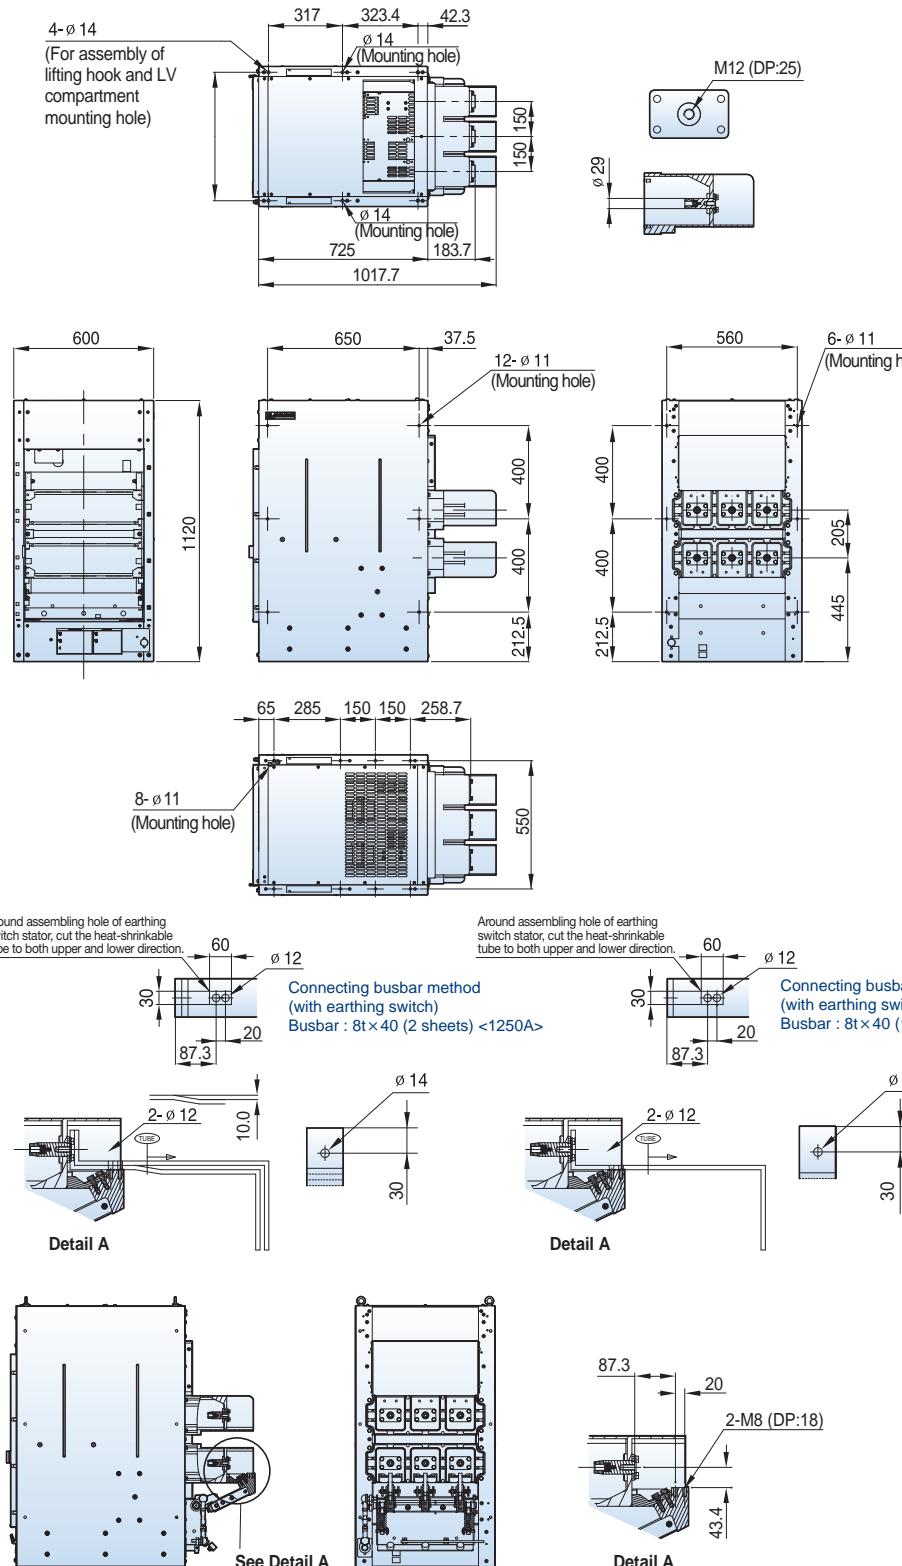
Susol**7.2kV, 20/25kA, 630/1250A****Withdrawable (H type cradle, phase distance 150mm)**

Dimensions - VL type


Susol







7.2kV, 20/25kA, 2000A

Fixed (P type, phase distance 150mm)

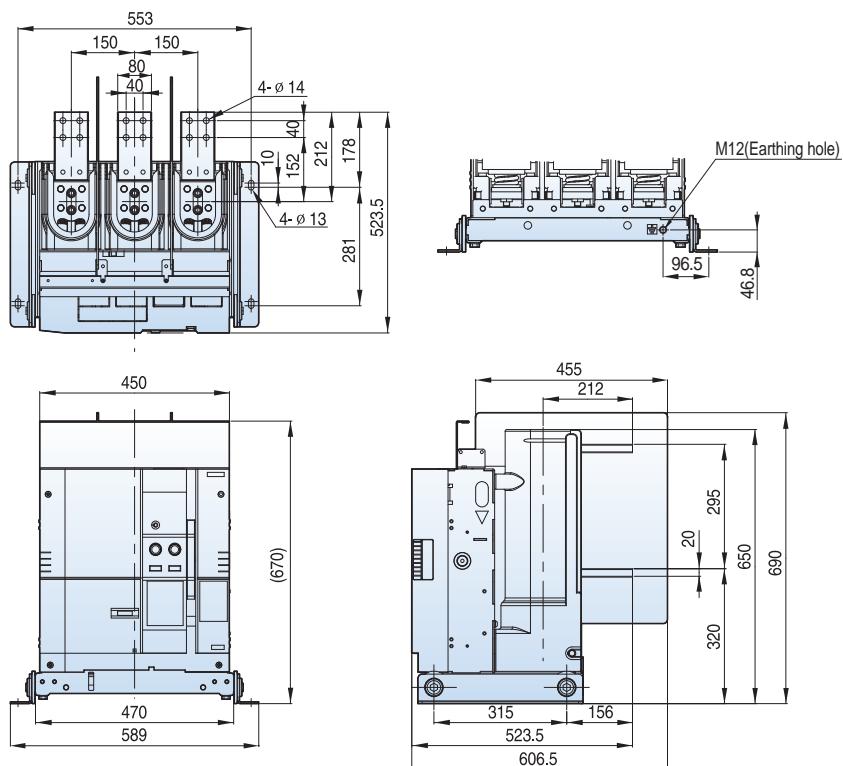

Withdrawable (E type unit, phase distance 150mm)

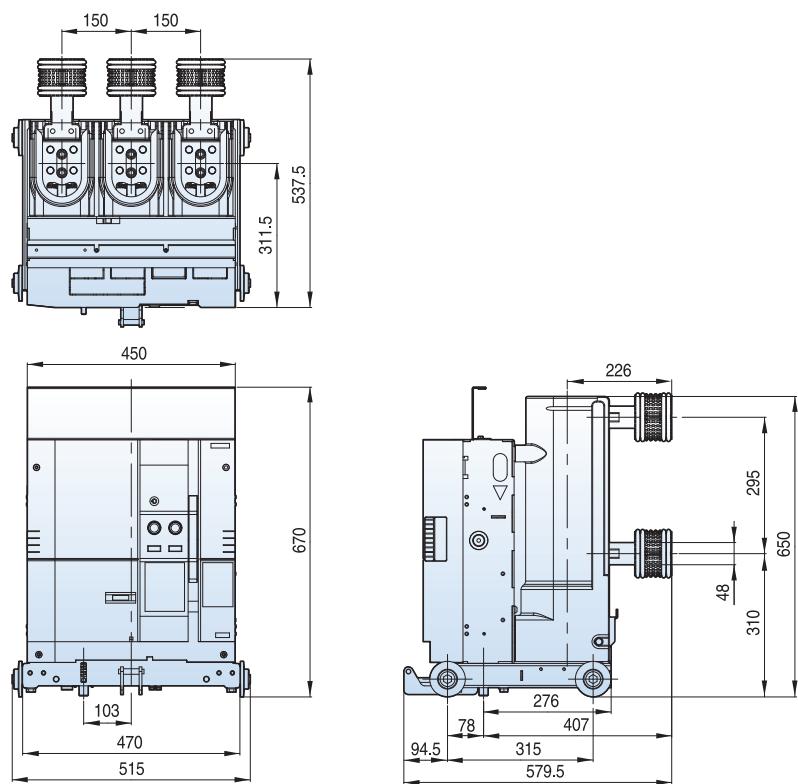

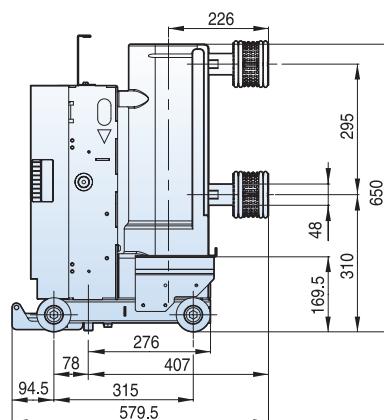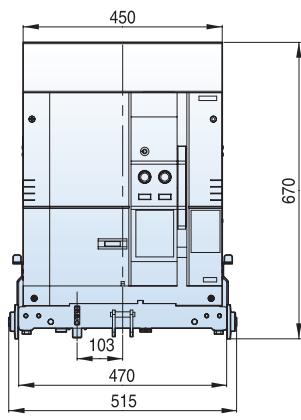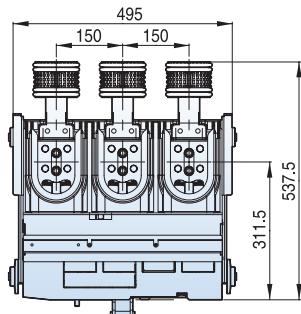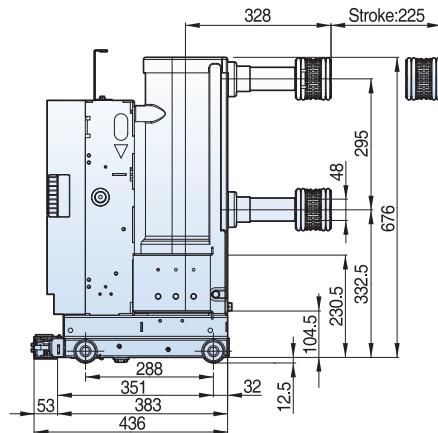
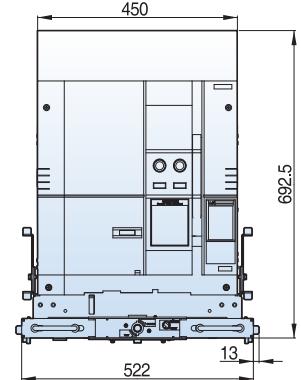
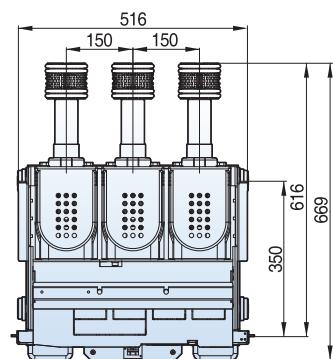
Susol**7.2kV, 20/25kA, 2000A****Withdrawable (F/G type unit, phase distance 150mm)****Withdrawable (K type unit T type, phase distance 150mm)**

Dimensions - VL type





Susol

7.2kV, 20/25kA, 2000A

Withdrawable (K type unit T2 type, phase distance 150mm)

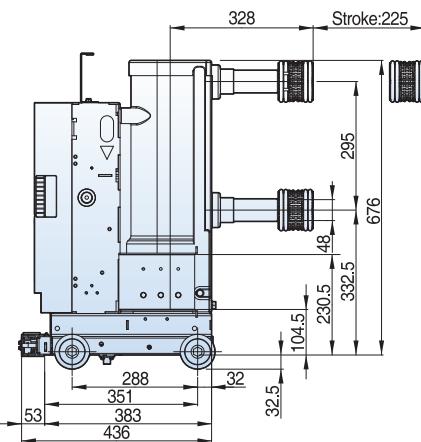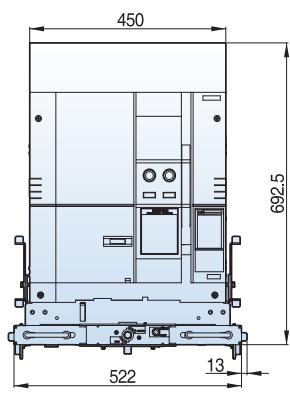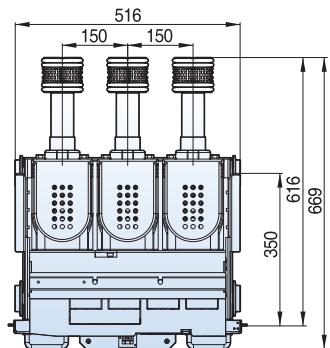

Withdrawable (E type cradle, phase distance 150mm)

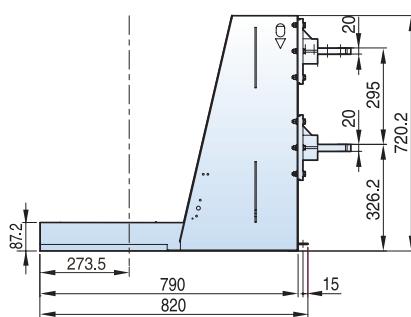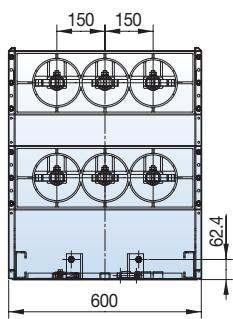
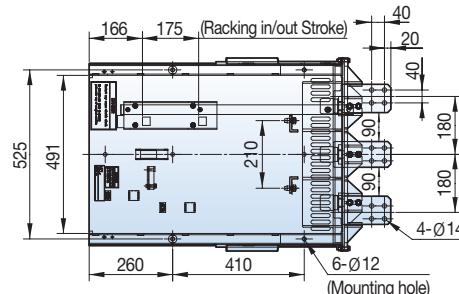
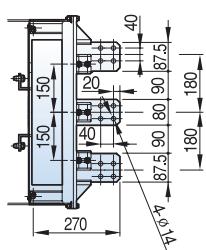


* Please be informed that the switchgear IP cover has to be back of —— mark.

Susol





7.2kV, 20/25kA, 2000A

Withdrawable (F type cradle, phase distance 150mm)

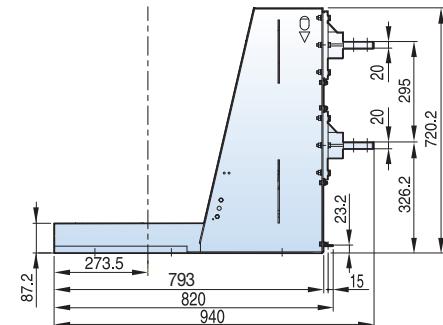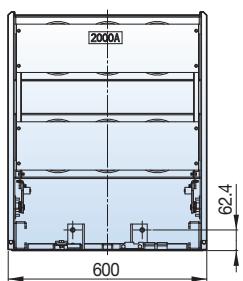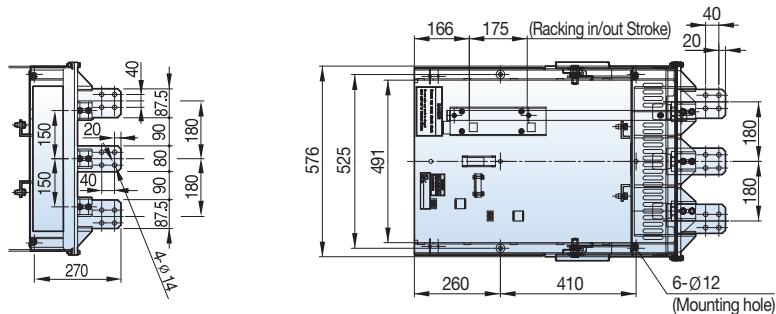

* Please be informed that the switchgear IP cover has to be back of —— mark.

Withdrawable (G type cradle, phase distance 150mm)

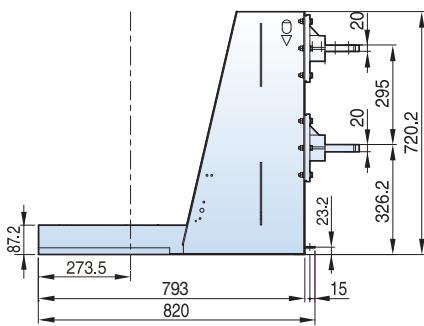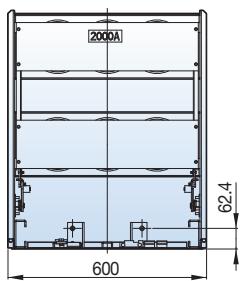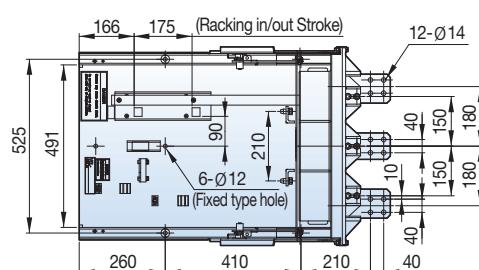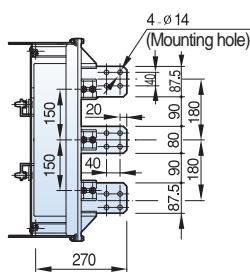



* Please be informed that the switchgear IP cover has to be back of —— mark.

Dimensions - VL type



Susol


7.2kV, 20/25kA, 2000A

Withdrawable (H type unit, phase distance 150mm)

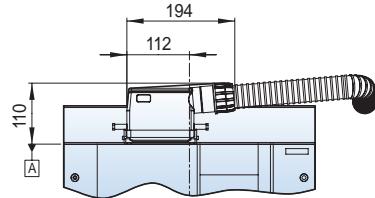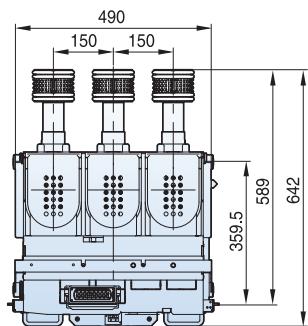

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

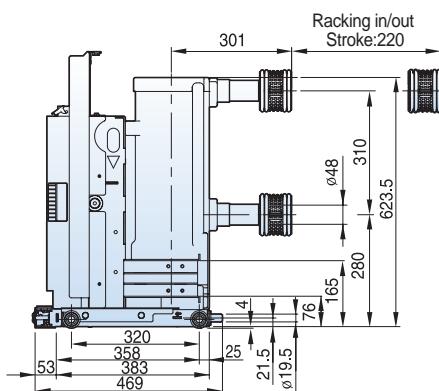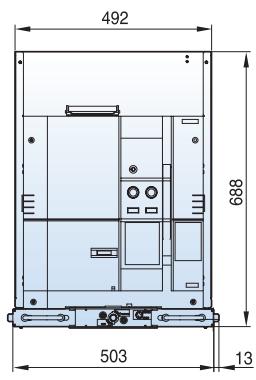

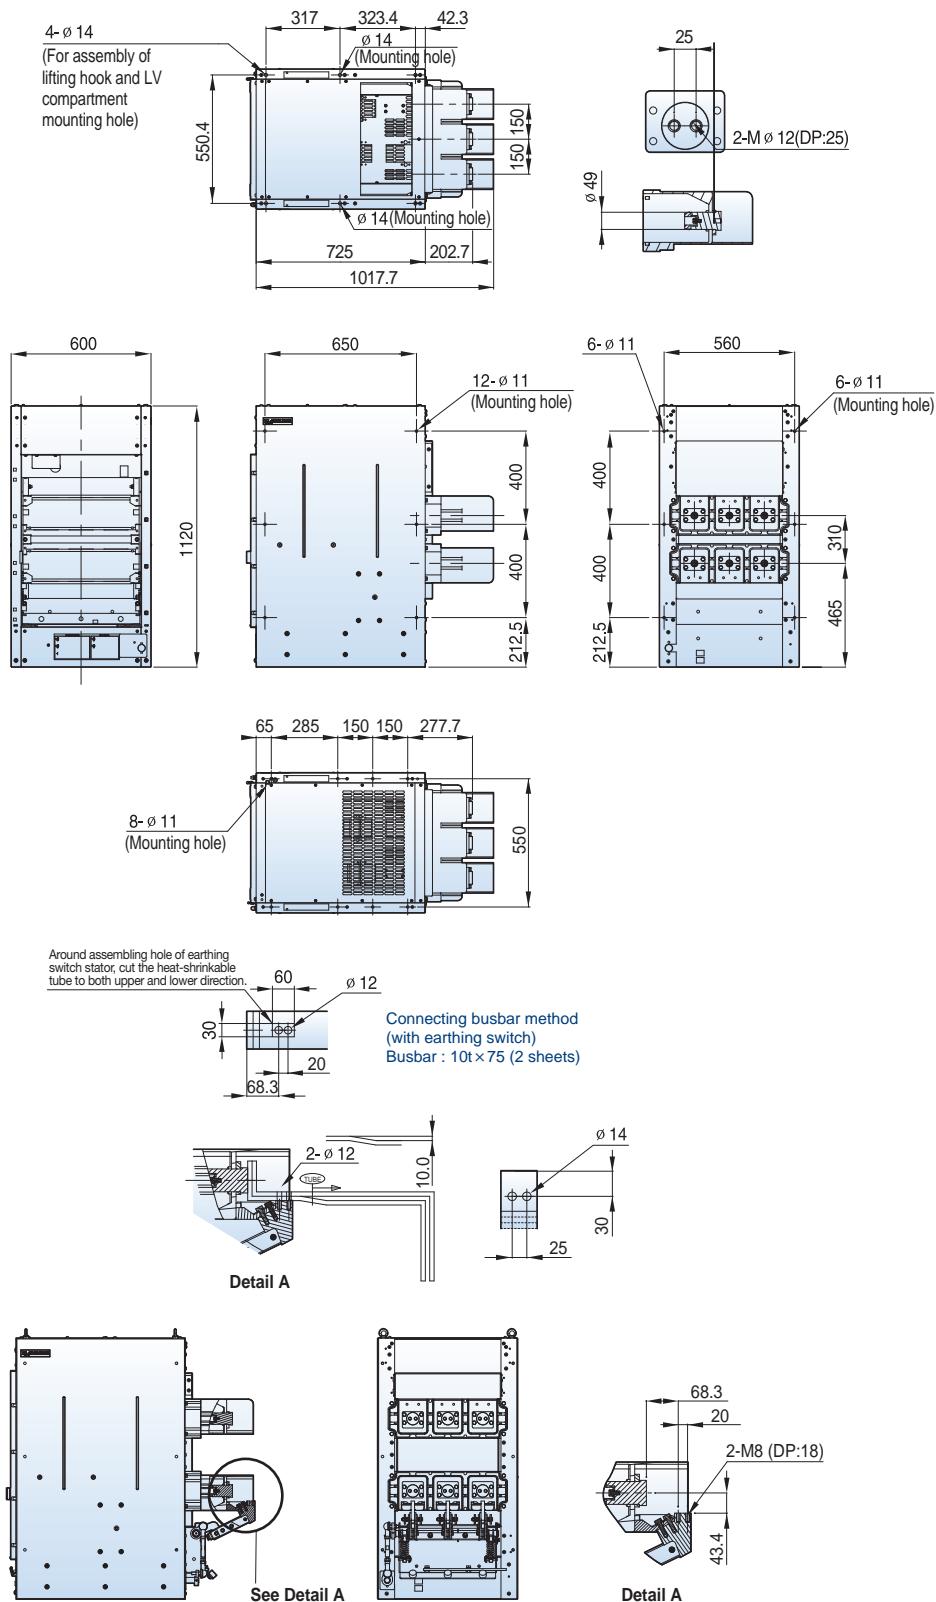
Susol**7.2kV, 20/25kA, 2000A****Withdrawable (H type cradle, phase distance 150mm)**

Dimensions - VL type


Susol


7.2kV, 31.5kA, 630A

Fixed (P type, phase distance 150mm)

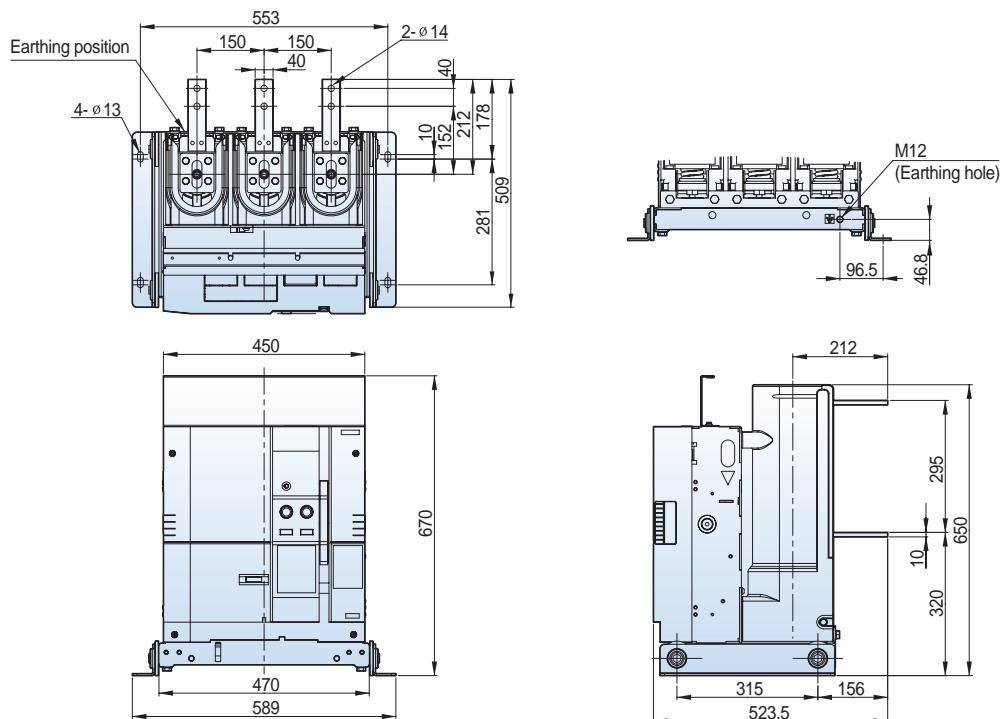

Withdrawable (H type unit, phase distance 150mm)

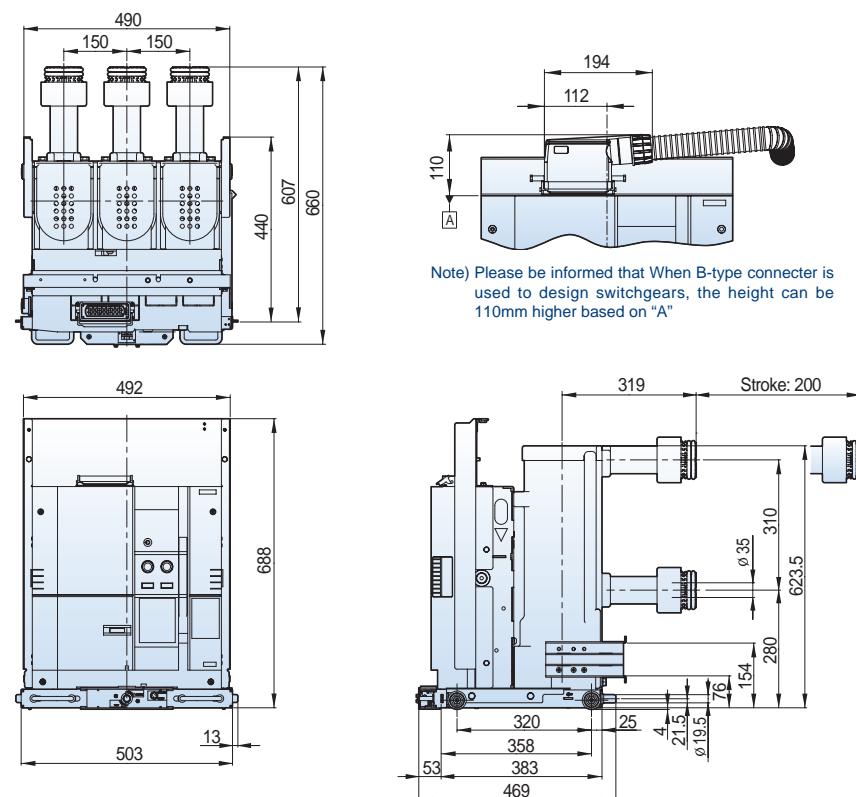

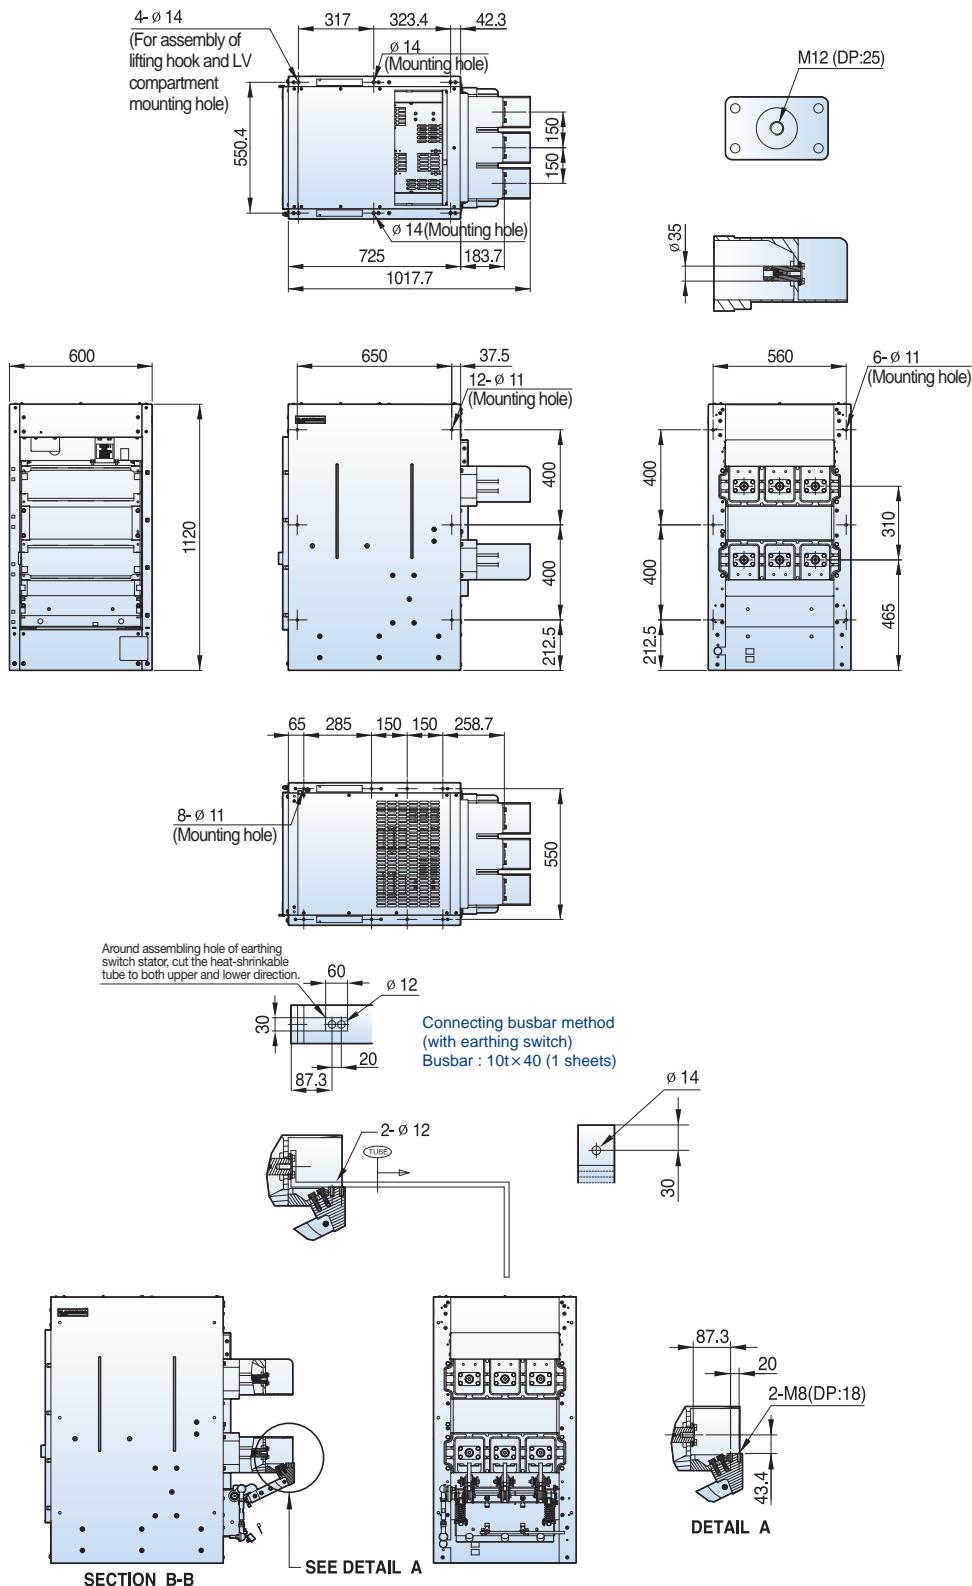
Susol**7.2kV, 31.5kA, 630A****Withdrawable (H type cradle, phase distance 150mm)**

Dimensions - VL type


Susol








7.2kV, 31.5kA, 1250A

Fixed (P type, phase distance 150mm)

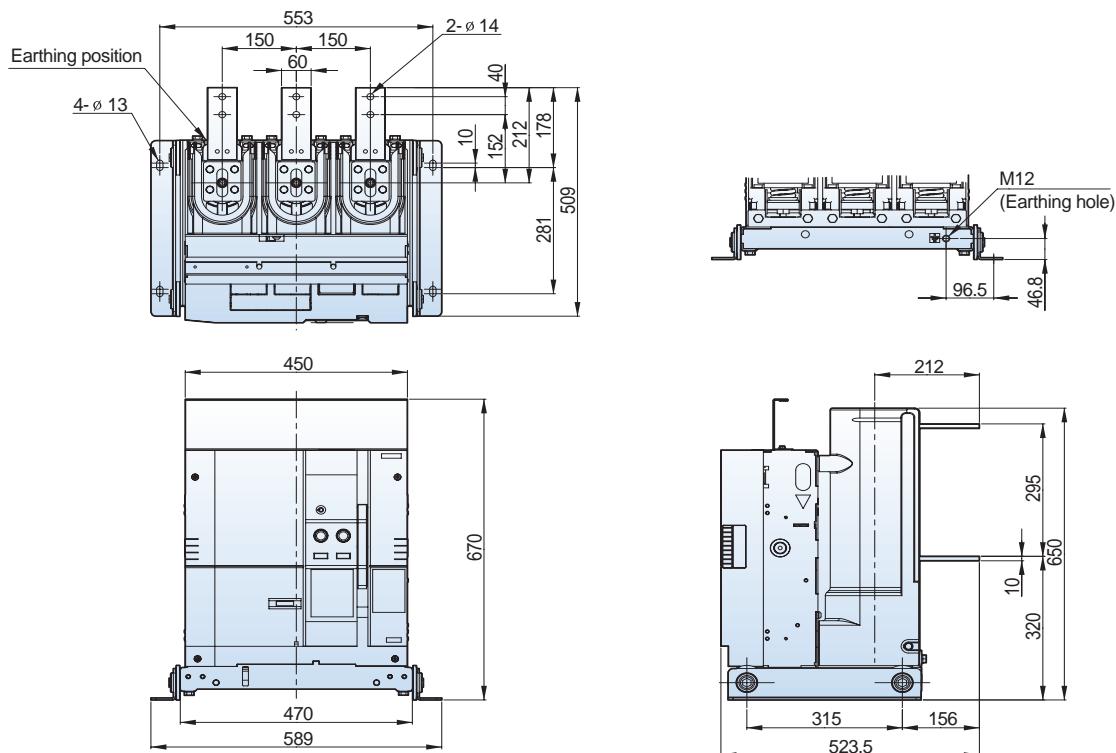

Withdrawable (E type unit, phase distance 150mm)

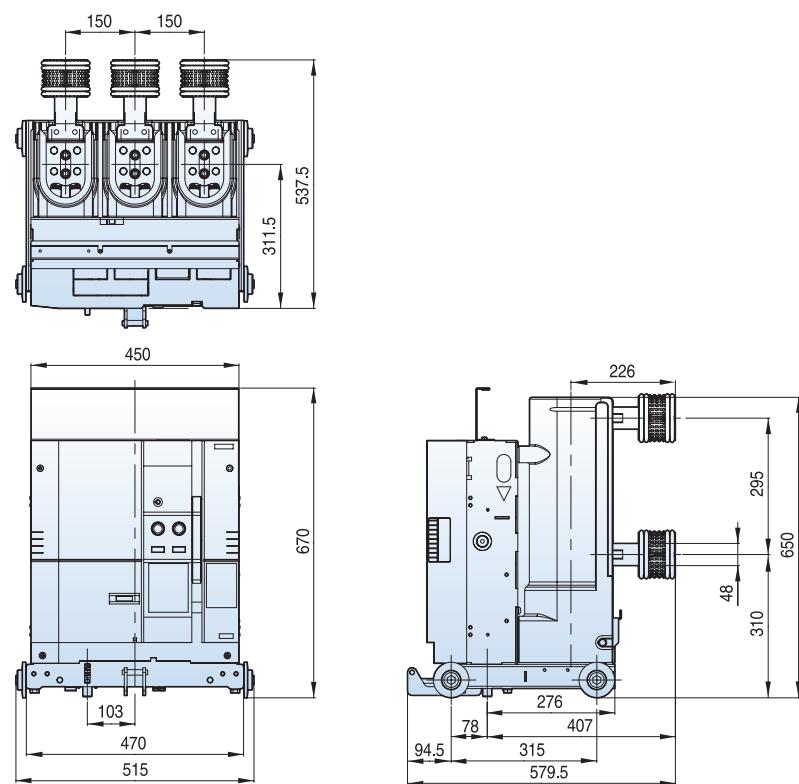

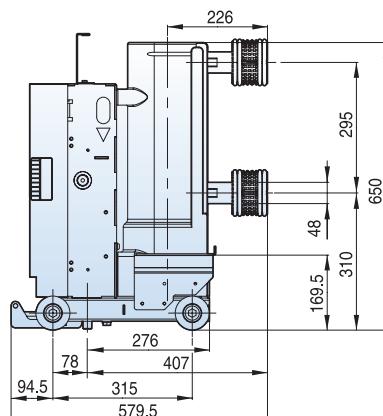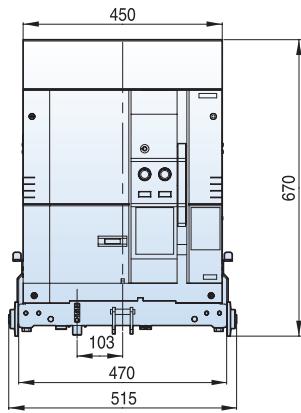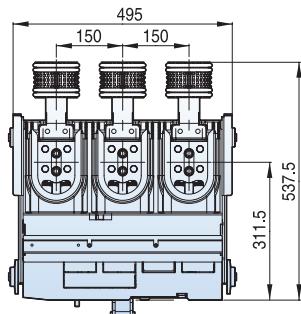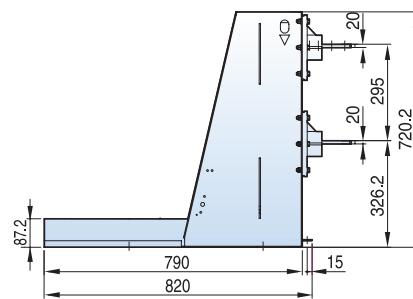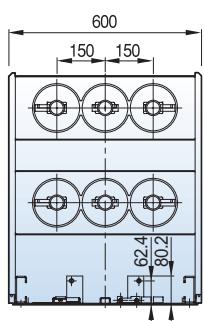
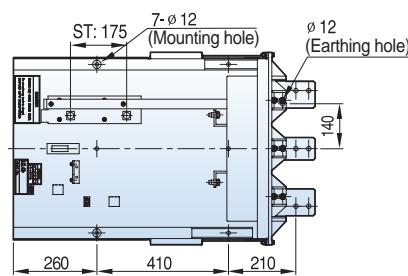
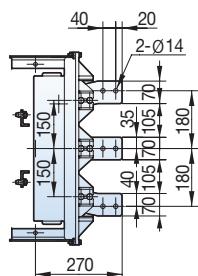
Susol**7.2kV, 31.5kA, 1250A****Withdrawable (F/G type unit, phase distance 150mm)****Withdrawable (E type cradle, phase distance 150mm)**

Dimensions - VL type





Susol







7.2kV, 31.5kA, 1250A

Withdrawable (F type cradle , phase distance 150mm)

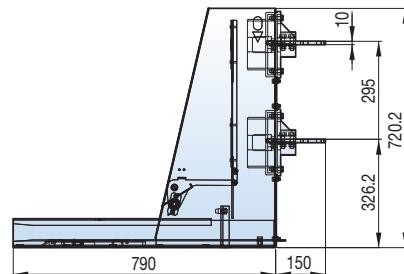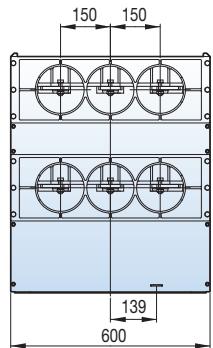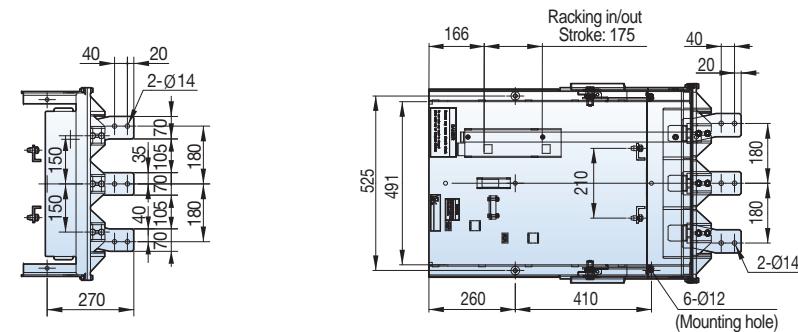

Withdrawable (G type cradle, phase distance 150mm)

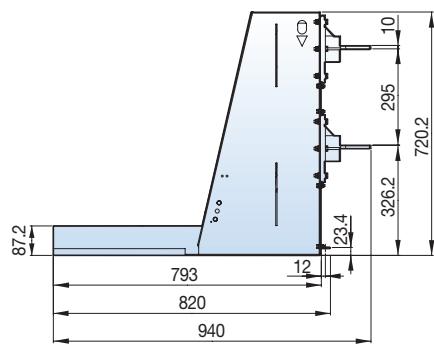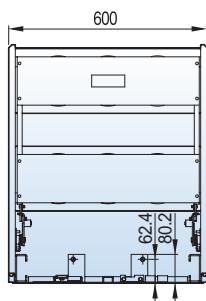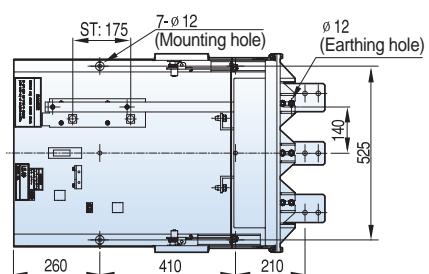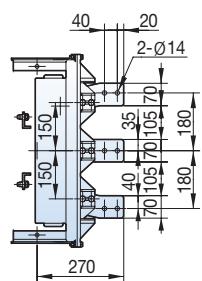

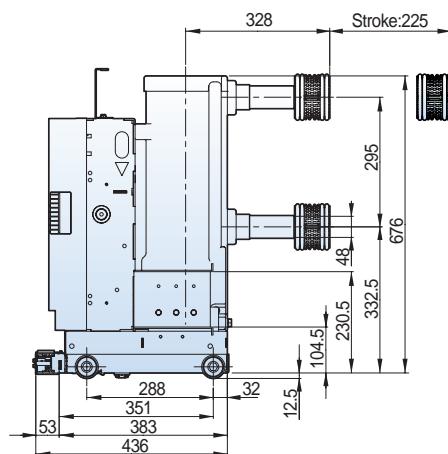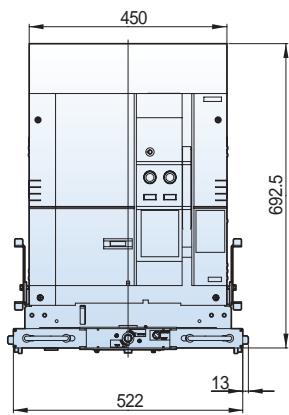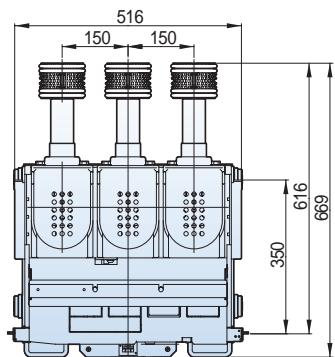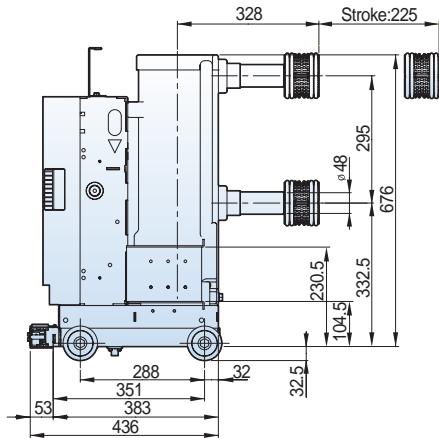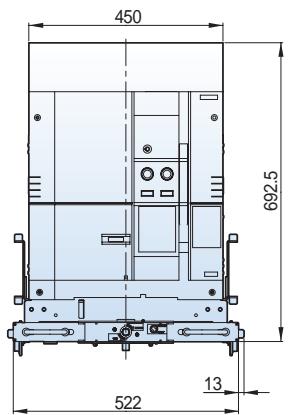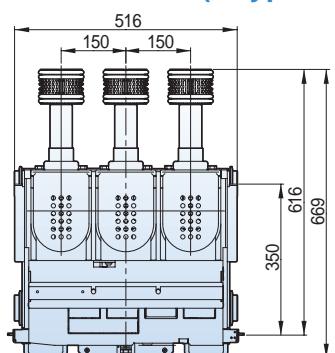
Susol**7.2kV, 31.5kA, 1250A****Withdrawable (K type unit T type, phase distance 150mm)****Withdrawable (K type unit T2 type, phase distance 150mm)**

Dimensions - VL type


Susol



7.2kV, 31.5kA, 1250A

Withdrawable (G type cradle T type, phase distance 150mm)


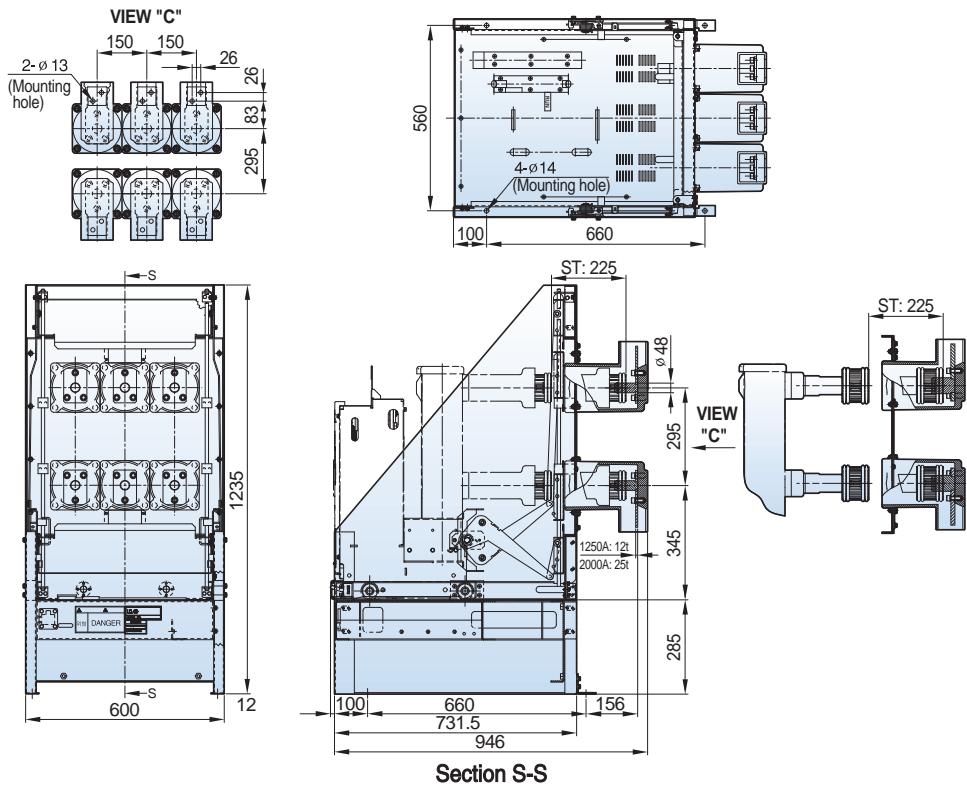


Withdrawable (MCSG cradle T2 type, phase distance 150mm)

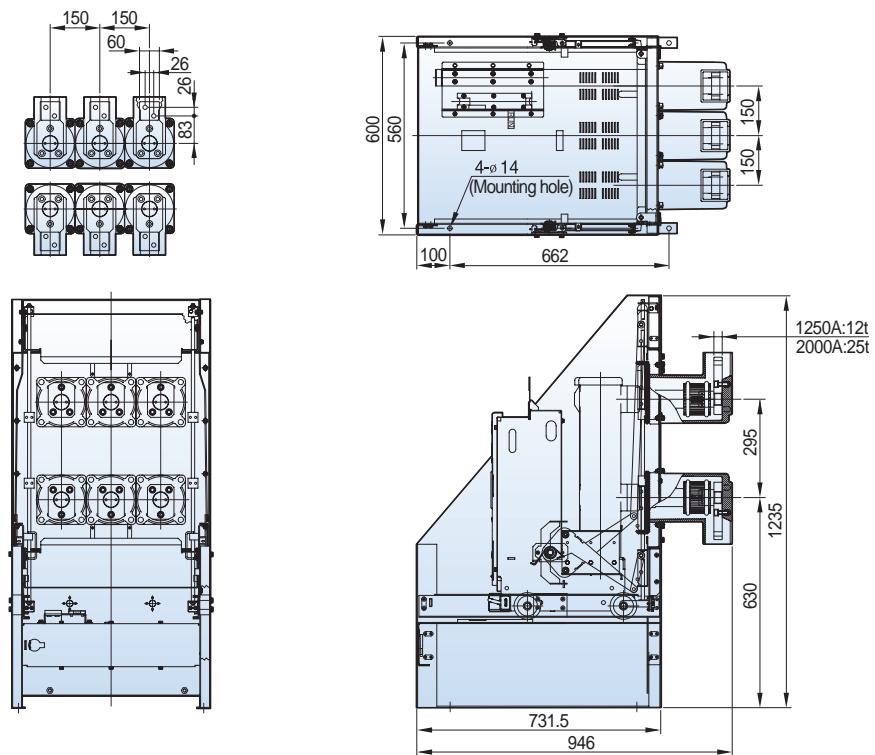

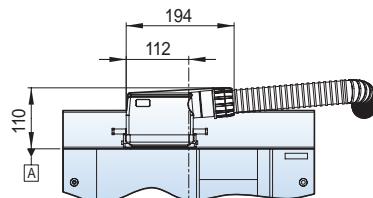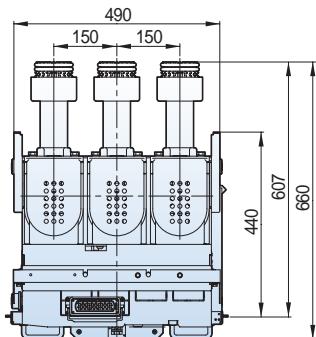Susol**7.2kV, 31.5kA, 1250A****Withdrawable (H type unit, phase distance 150mm)**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

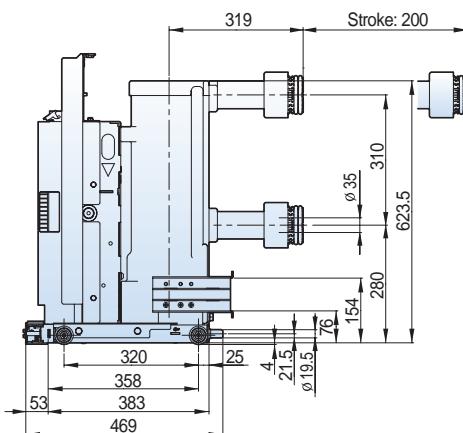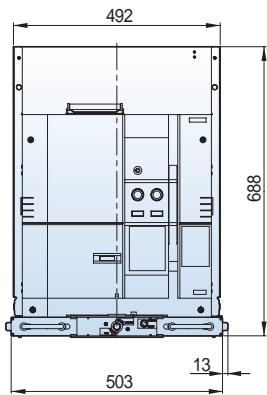




Dimensions - VL type

Susol

7.2kV, 31.5kA, 1250A

Withdrawable (H type cradle, phase distance 150mm)

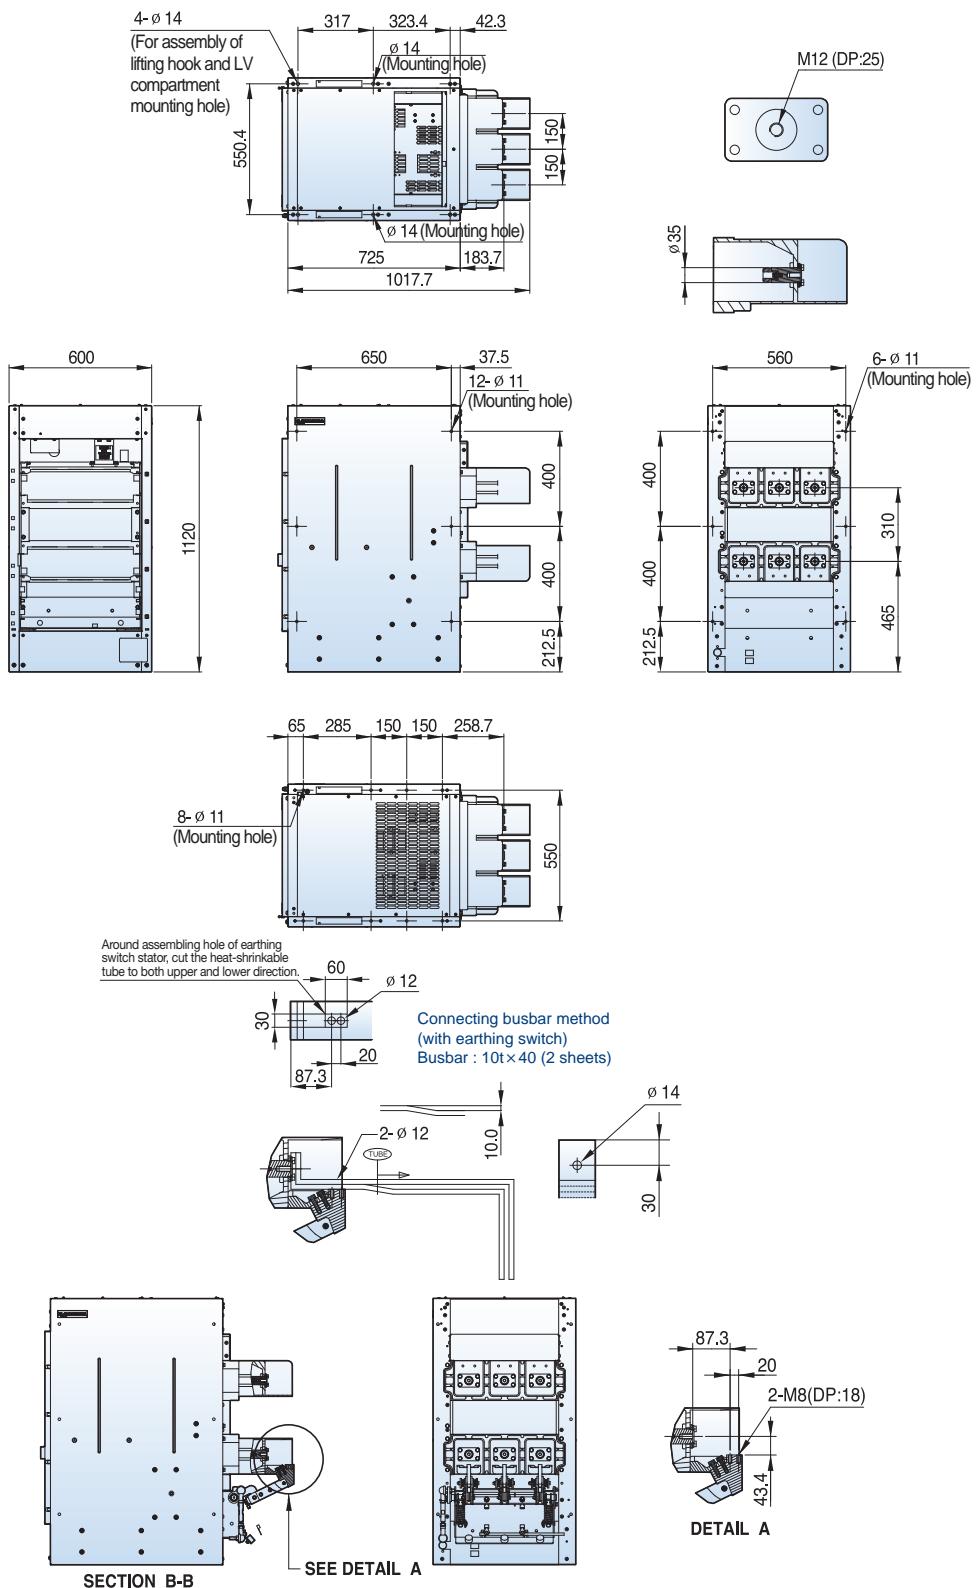


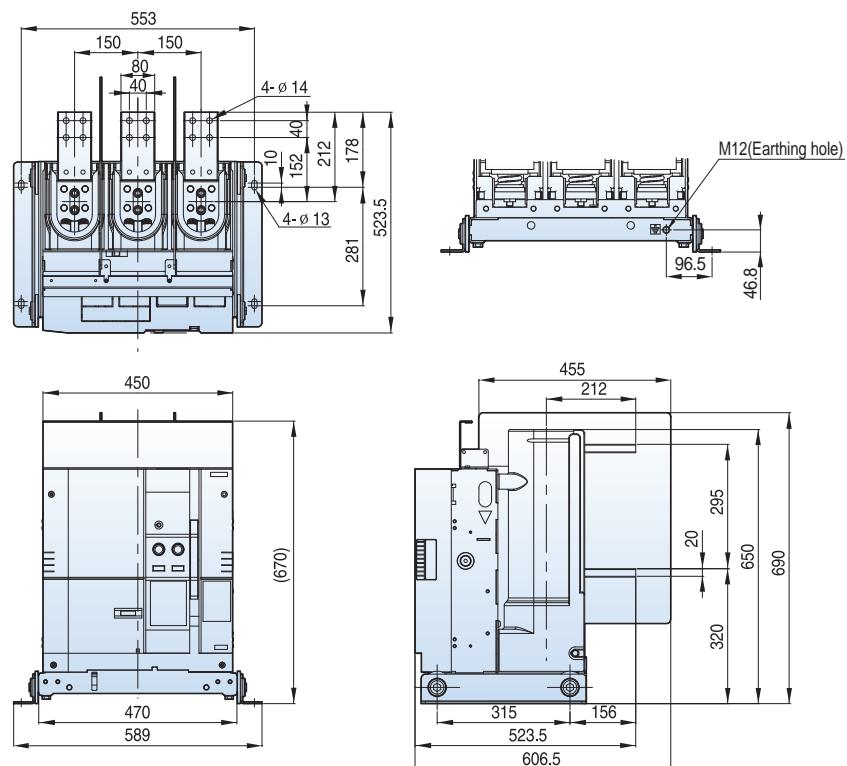
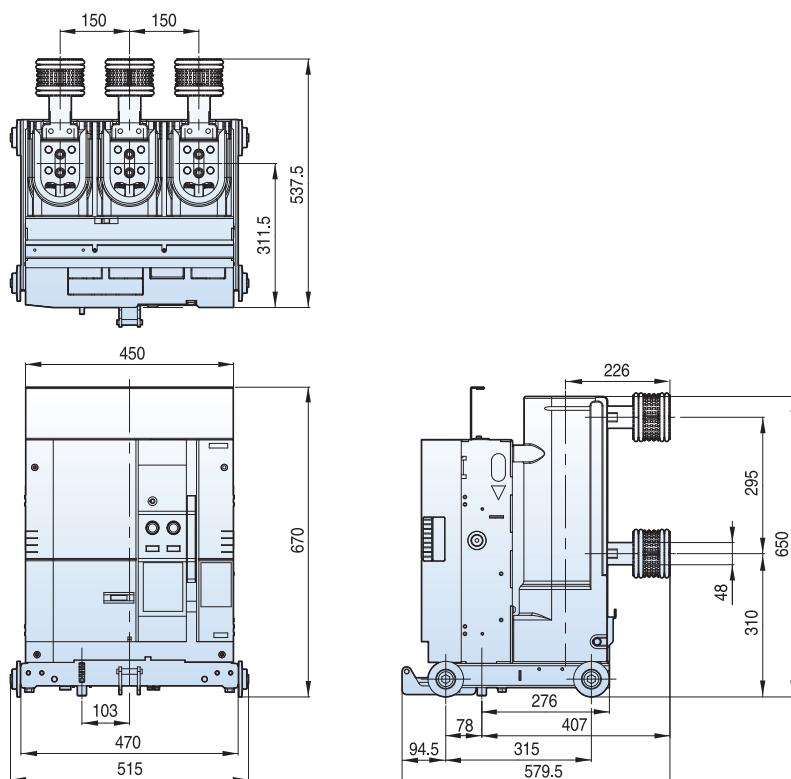
Susol**7.2kV, 31.5kA, 2000A****Fixed (P type, phase distance 150mm)****Withdrawable (E type unit, phase distance 150mm)**

Dimensions - VL type





Susol









7.2kV, 31.5kA, 2000A

Withdrawable (F/G type unit, phase distance 150mm)

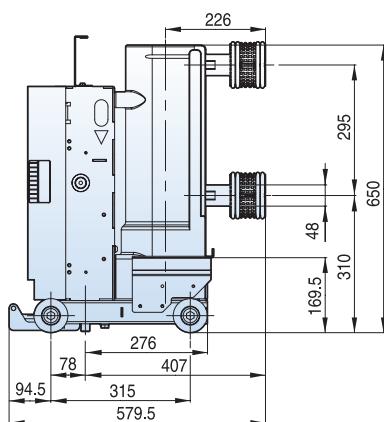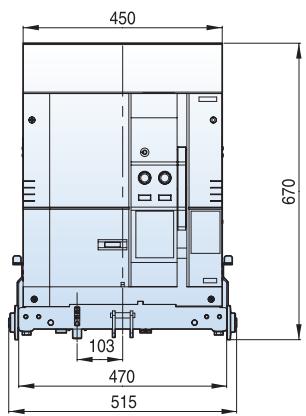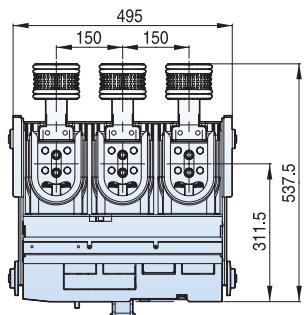

Withdrawable (E type cradle, phase distance 150mm)

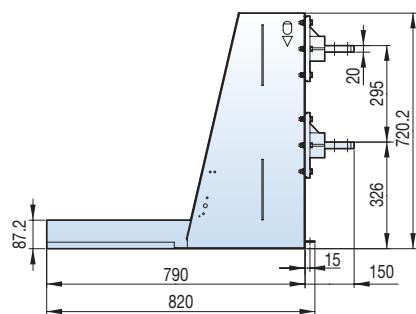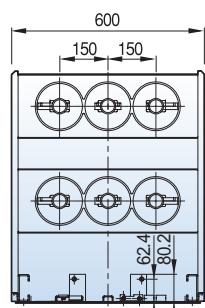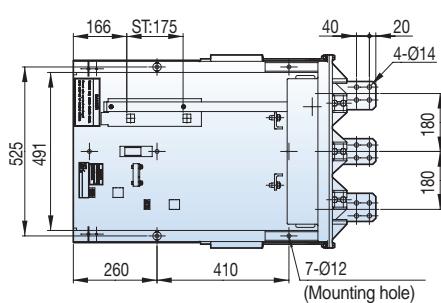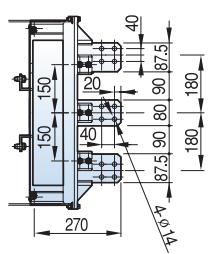

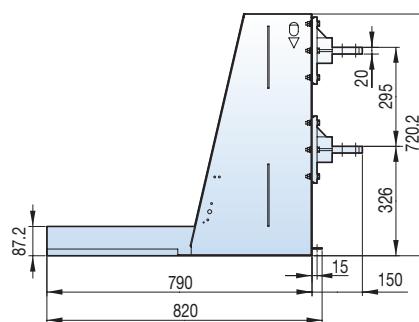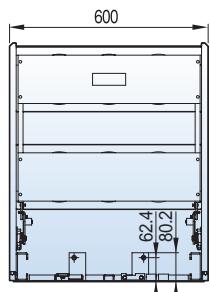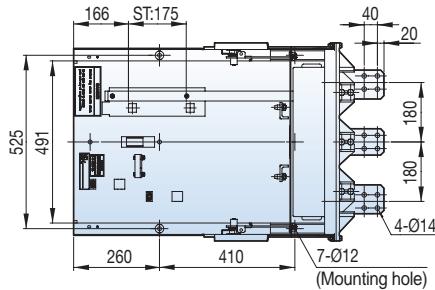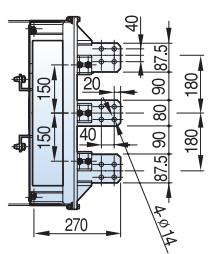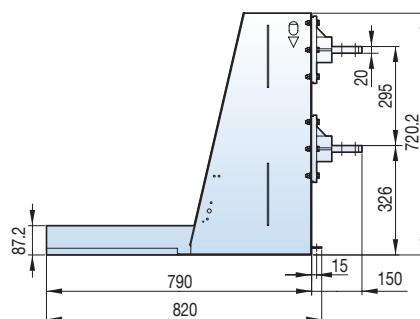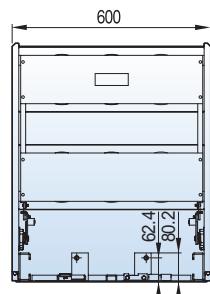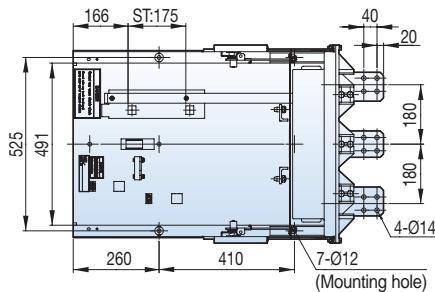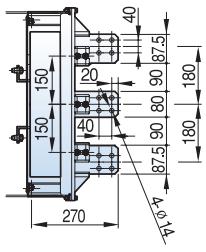
Susol**7.2kV, 31.5kA, 2000A****Withdrawable (F type cradle, phase distance 150mm)****Withdrawable (G type cradle, phase distance 150mm)**

Dimensions - VL type


Susol



7.2kV, 31.5kA, 1250/2000A

Withdrawable (Fs type unit, phase distance 150mm)

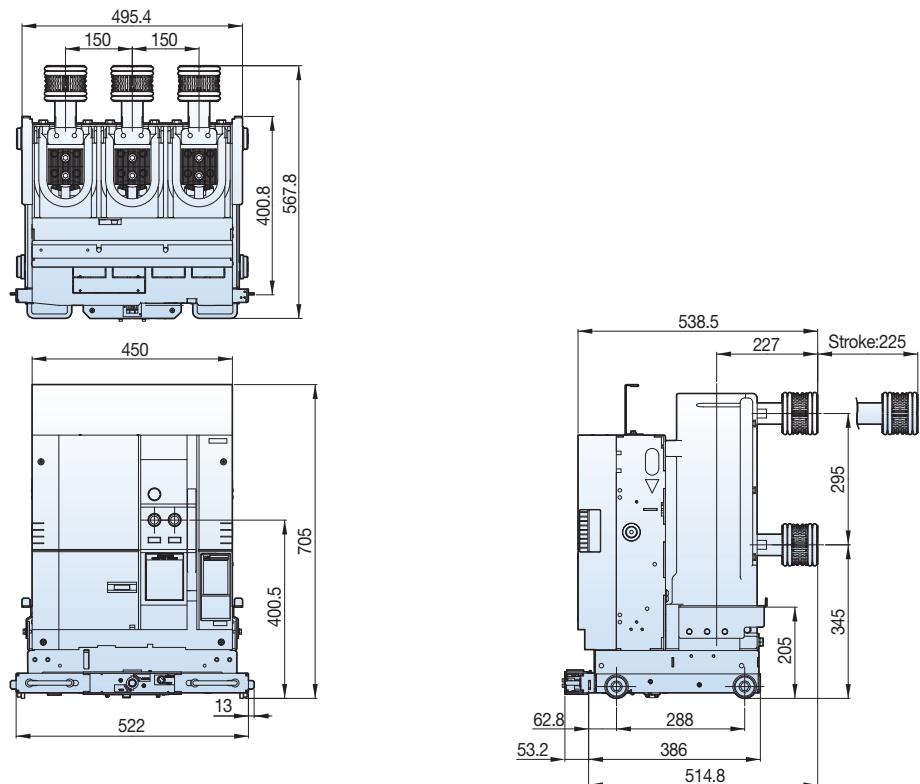

Withdrawable (Fs type cradle, phase distance 150mm)

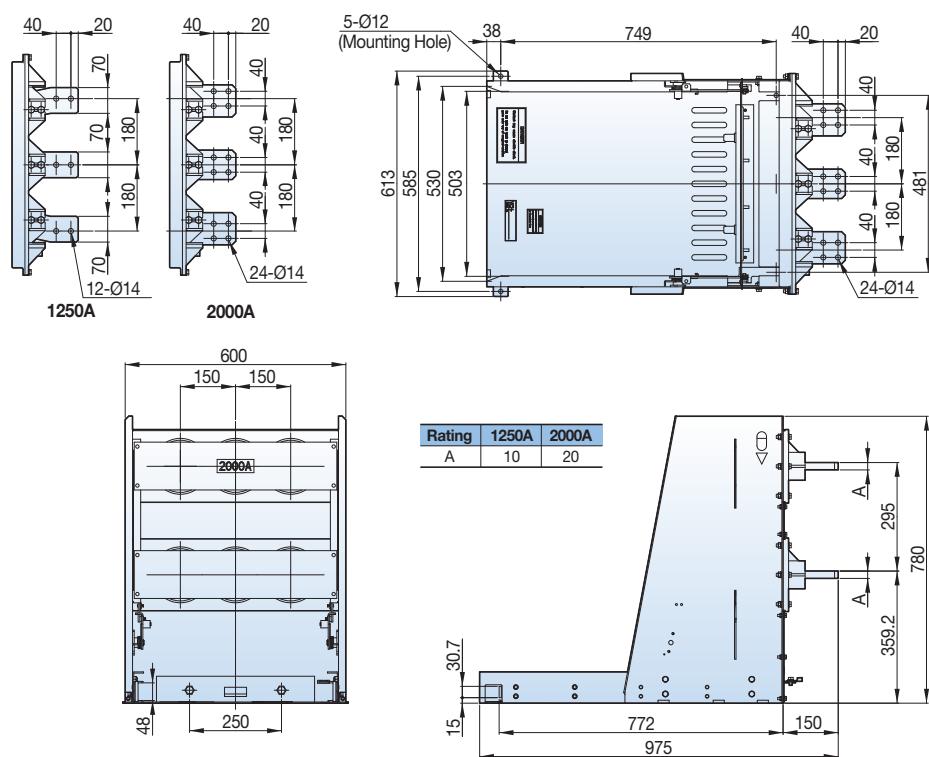

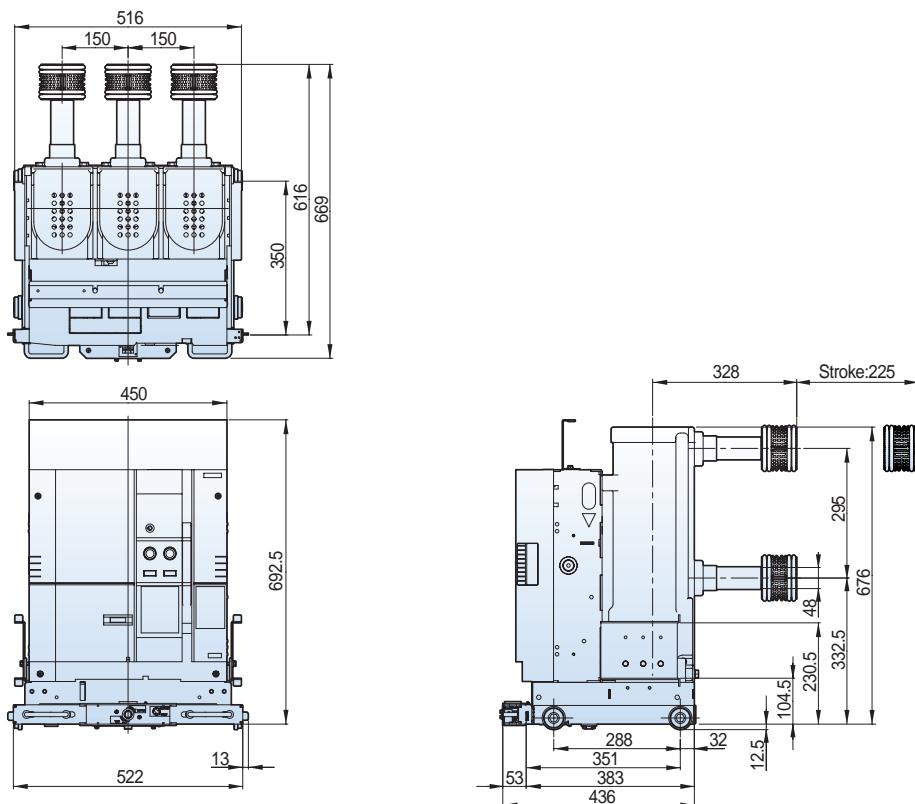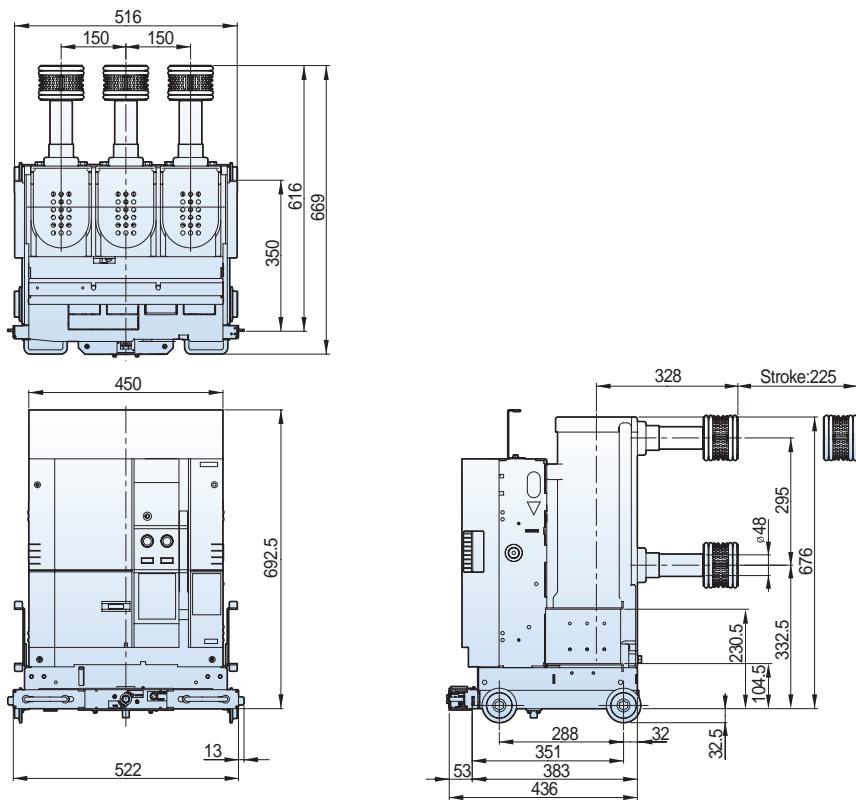
Susol**7.2kV, 31.5kA, 2000A****Withdrawable (K type unit T type, phase distance 150mm)****Withdrawable (K type unit T2 type, phase distance 150mm)**

Dimensions - VL type


Susol



7.2kV, 31.5kA, 2000A

Withdrawable (G type cradle T type, phase distance 150mm)


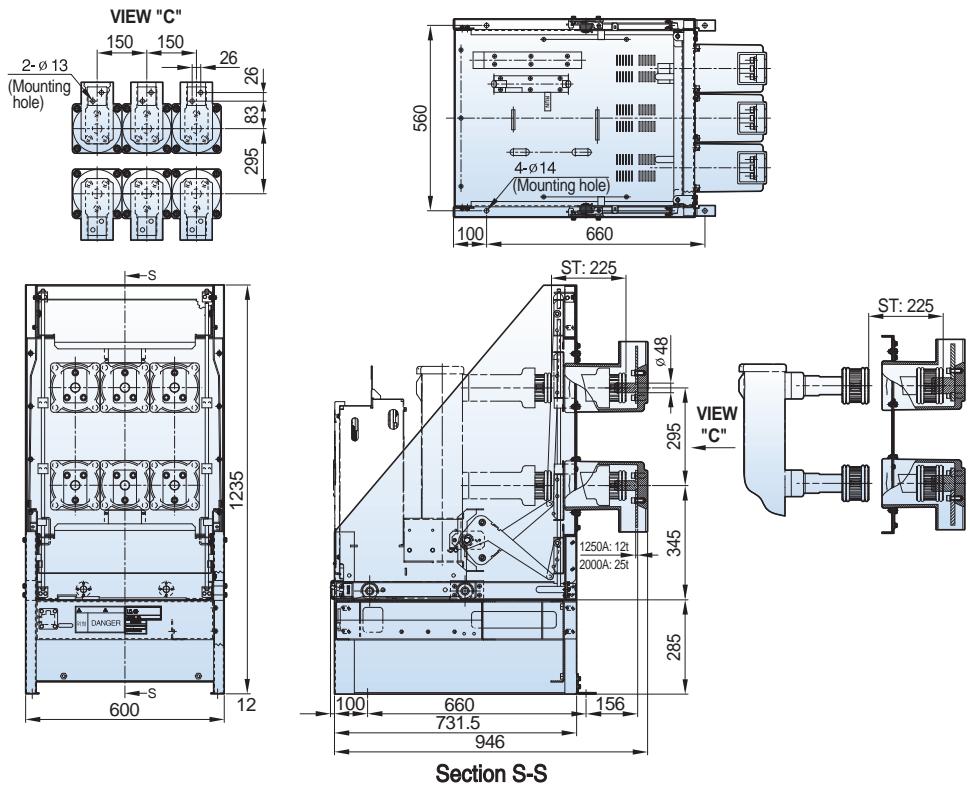


Withdrawable (MCSG cradle T2 type, phase distance 150mm)

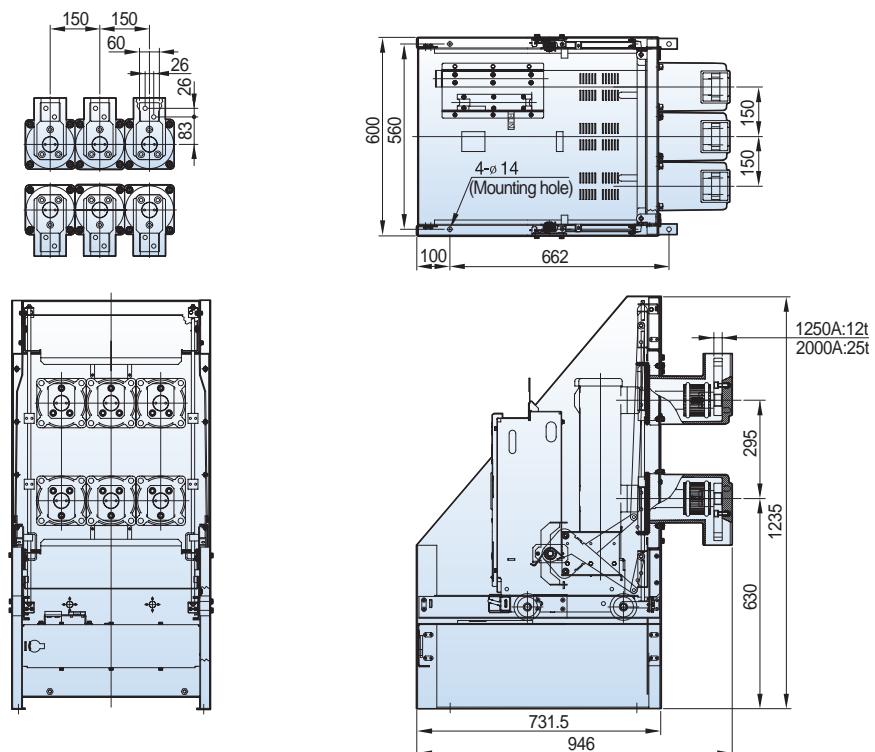

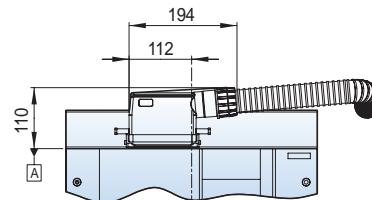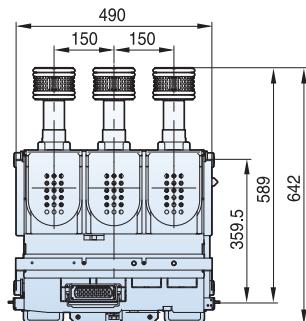Susol**7.2kV, 31.5kA, 2000A****Withdrawable (H type unit, phase distance 150mm)**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

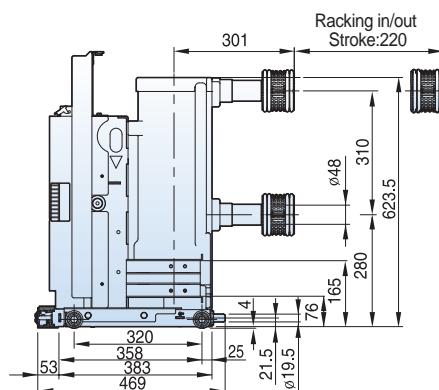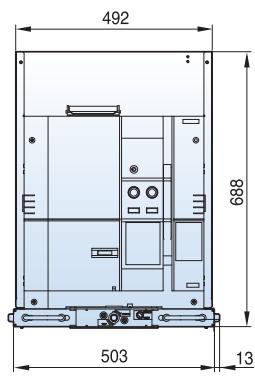




Dimensions - VL type

Susol

7.2kV, 31.5kA, 2000A

Withdrawable (H type cradle, phase distance 150mm)

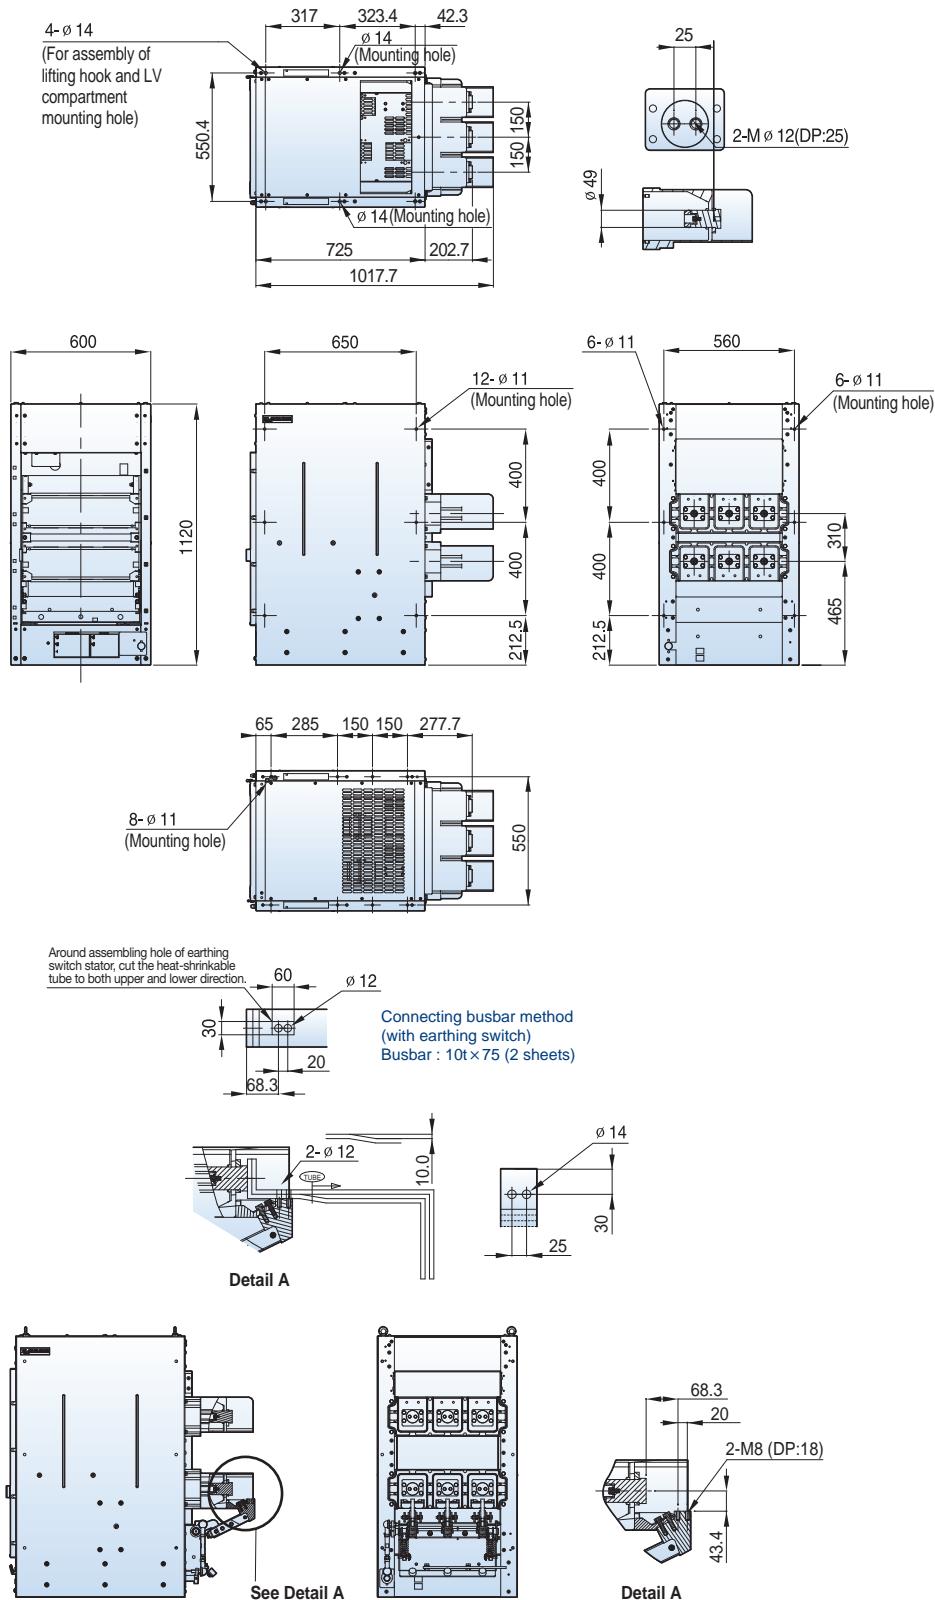

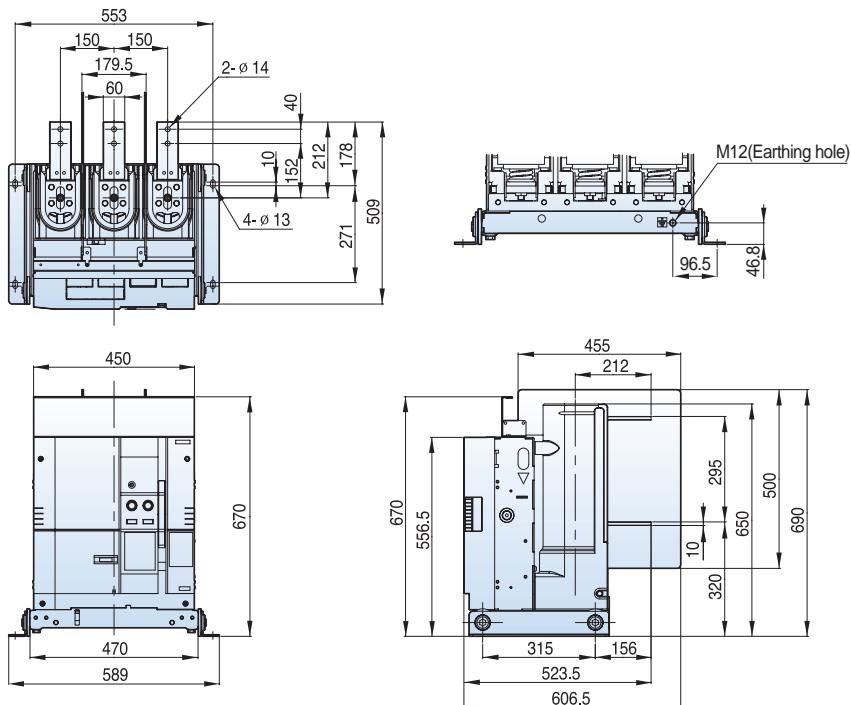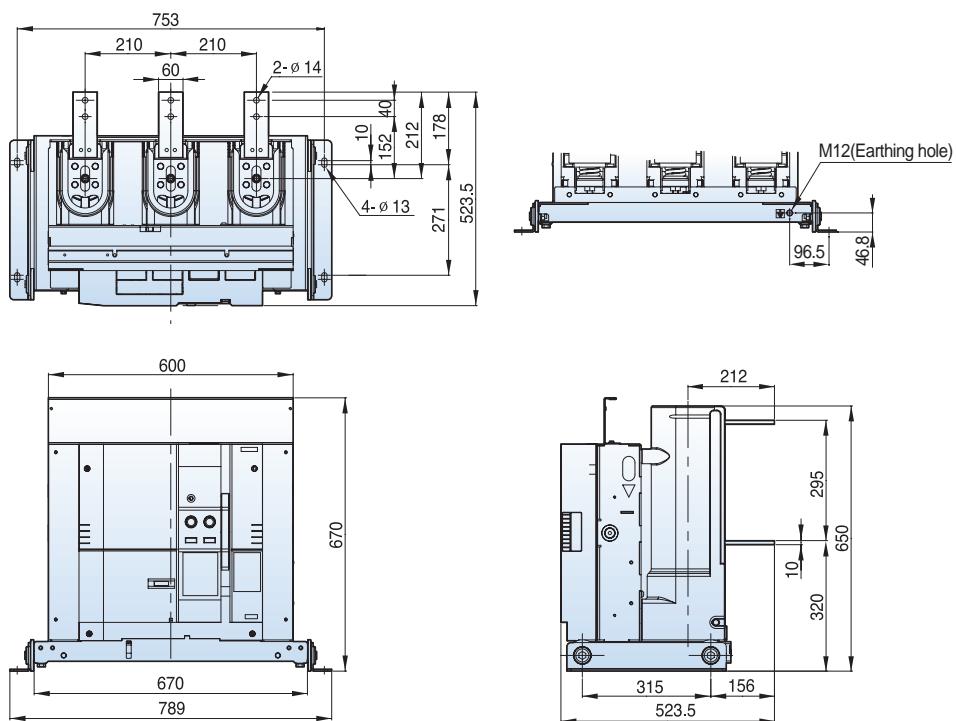
Susol**12/17.5kV, 20/25kA, 630/1250A****Fixed (P type, phase distance 150mm)****Fixed (P type, phase distance 210mm)**

Dimensions - VL type


Susol



12/17.5kV, 20/25kA, 630/1250A

Withdrawable (Compatible with existing E type unit, phase distance 210mm)

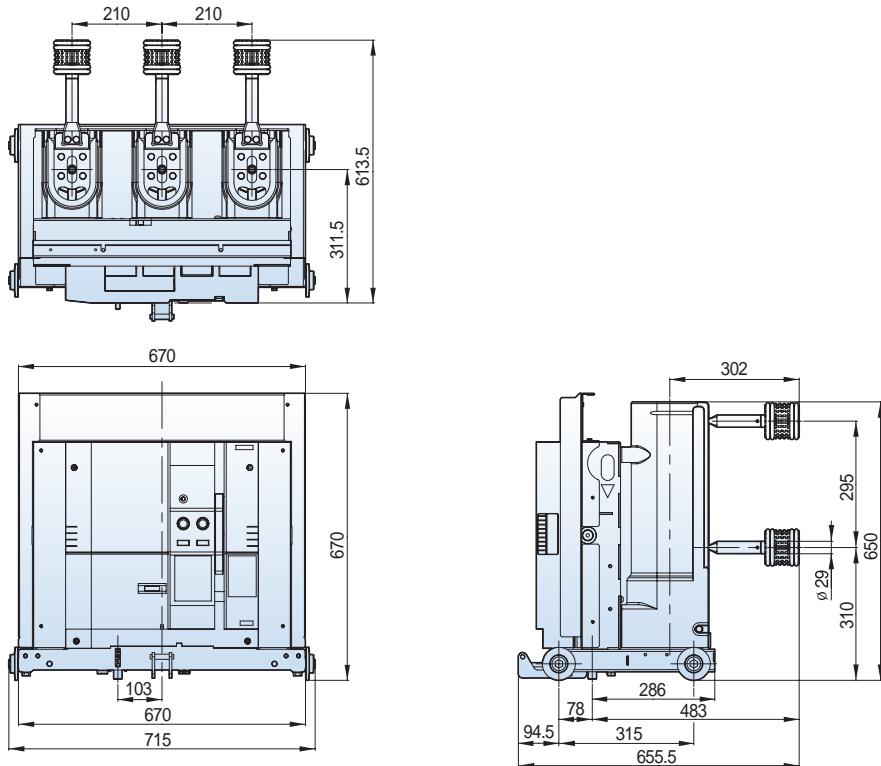

Withdrawable (Compatible with existing F type unit, phase distance 210mm)

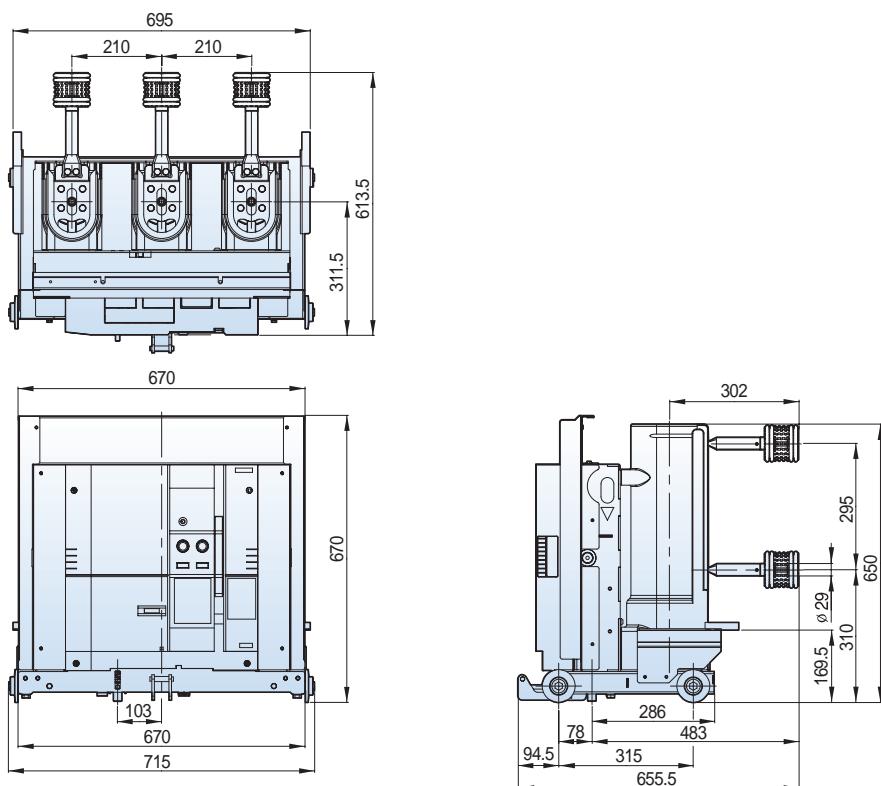


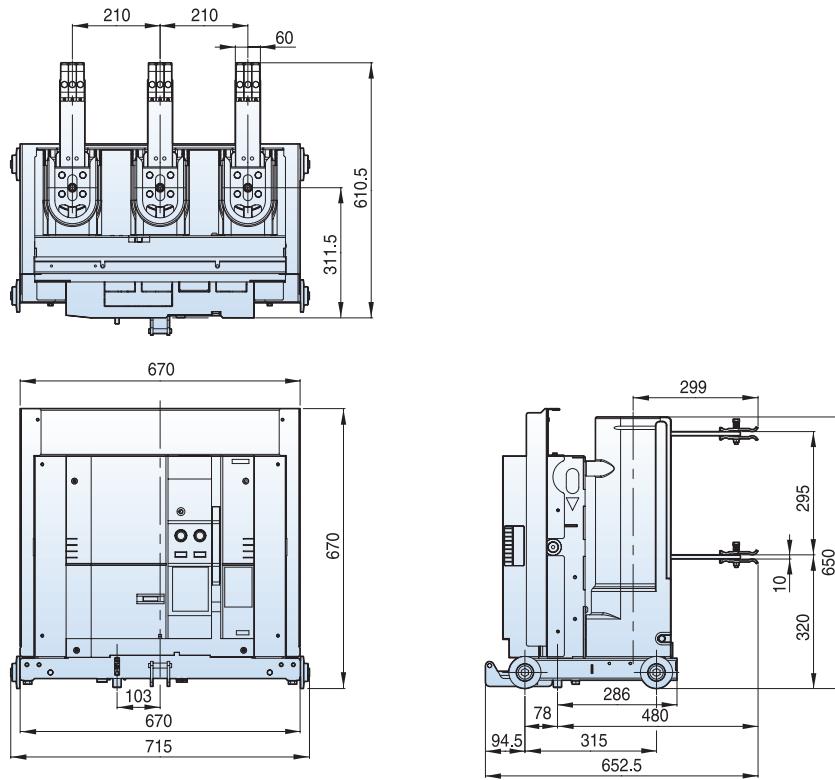
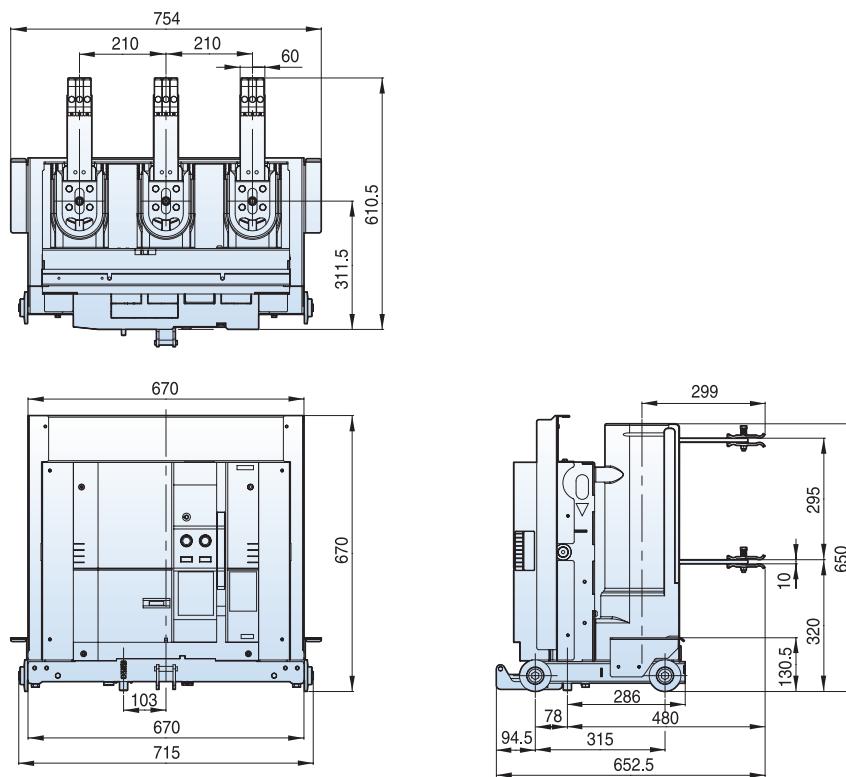
Susol**12/17.5kV, 20/25kA, 630/1250A****Withdrawable (E type unit, phase distance 210mm)****Withdrawable (F type unit, phase distance 210mm)**

Dimensions - VL type




Susol

12kV, 20/25kA, 630/1250A

Withdrawable (K type unit T type, phase distance 150mm)

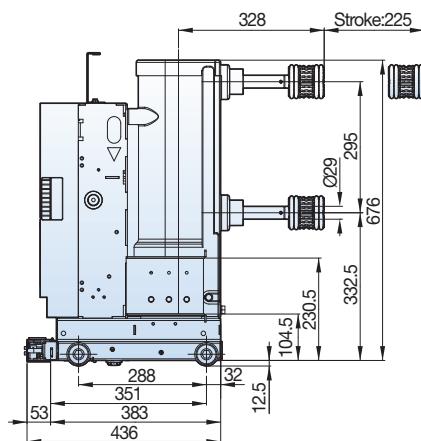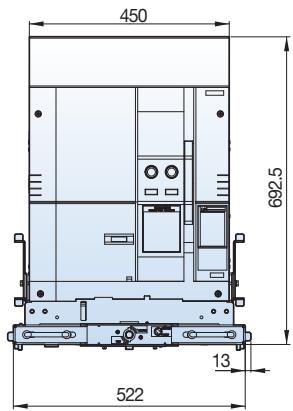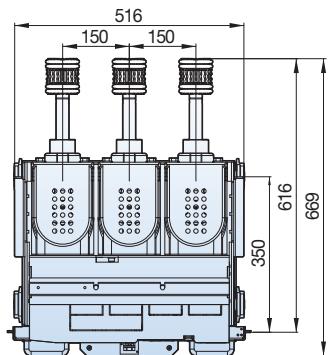


Withdrawable (K type unit T2 type, phase distance 150mm)

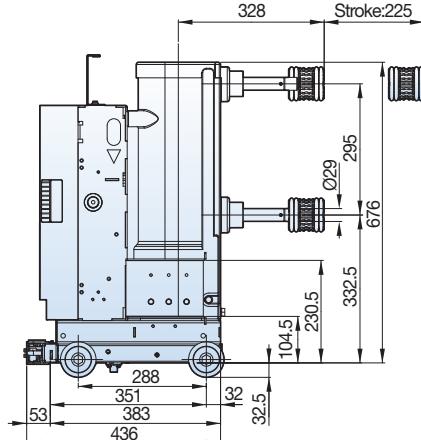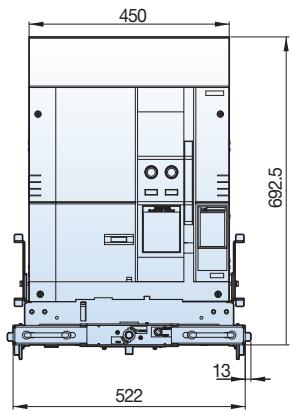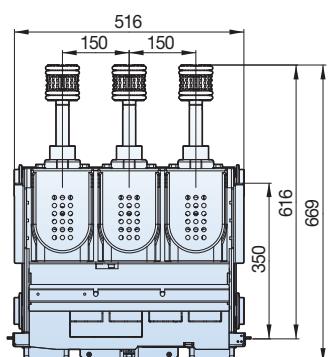

Susol

12/17.5kV, 20/25kA, 630A


Withdrawable (Compatible with existing E cradle, phase distance 210mm)

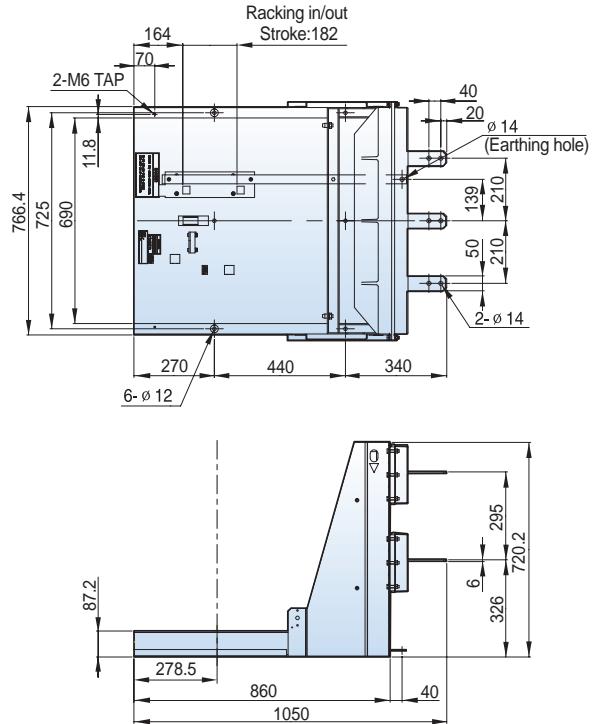

* Please be informed that the switchgear IP cover has to be back of —— mark.

12/17.5kV, 20/25kA, 1250A

Withdrawable (Compatible with existing E cradle, phase distance 210mm)

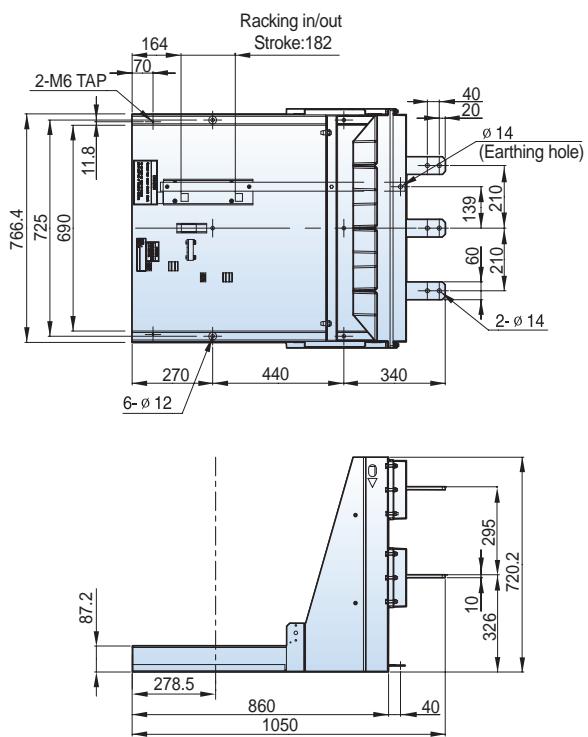


* Please be informed that the switchgear IP cover has to be back of —— mark.

Dimensions - VL type

Susol

12/17.5kV, 20/25kA, 630A


Withdrawable (Compatible with existing F cradle, phase distance 210mm)

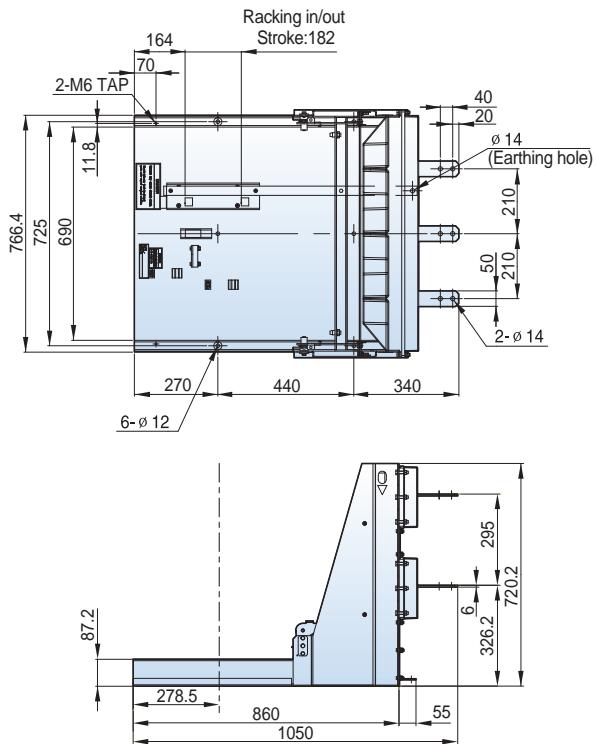


* Please be informed that the switchgear IP cover has to be back of —— mark.

12/17.5kV, 20/25kA, 1250A


Withdrawable (Compatible with existing F cradle, phase distance 210mm)

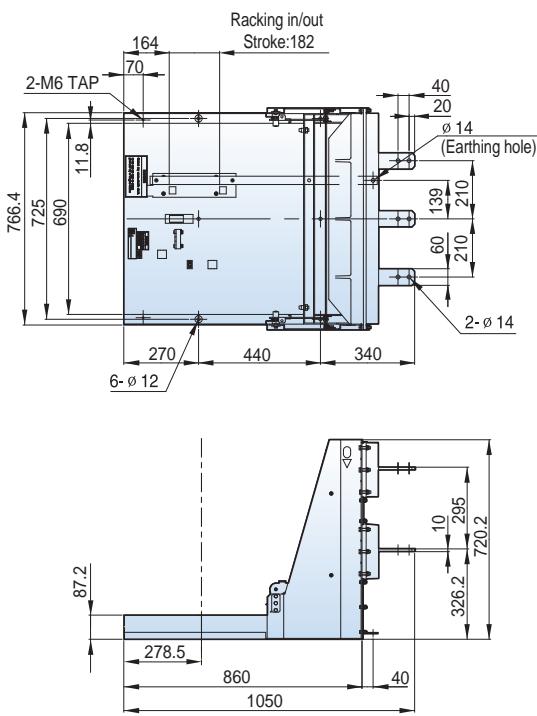

* Please be informed that the switchgear IP cover has to be back of —— mark.

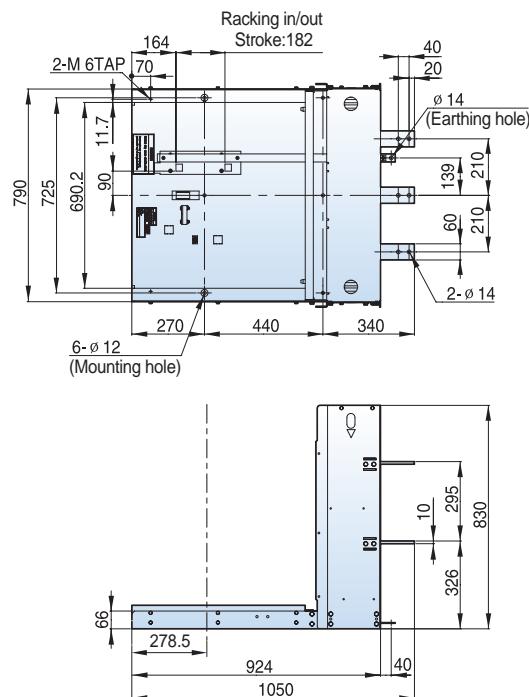Susol**12/17.5kV, 20/25kA, 630/1250A****Withdrawable (E type cradle, phase distance 210mm)**

* Please be informed that the switchgear IP cover has to be back of —— mark.

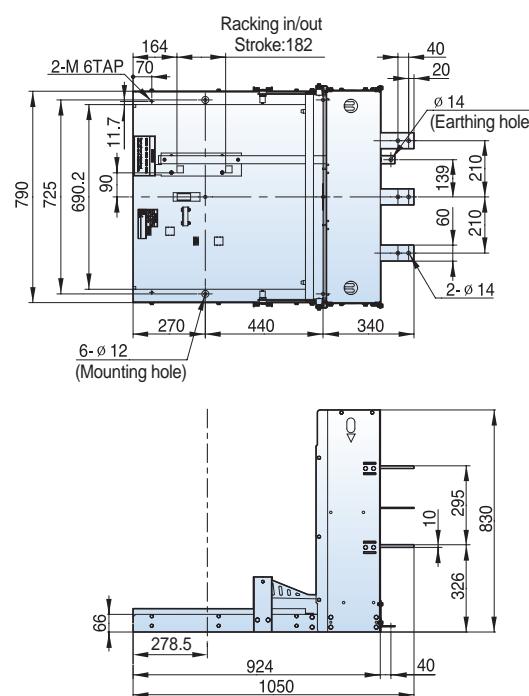Withdrawable (F type cradle, phase distance 210mm)



* Please be informed that the switchgear IP cover has to be back of —— mark.

Dimensions - VL type



Susol

12/17.5kV, 20/25kA, 630/1250A



Withdrawable (H type unit, phase distance 150mm)

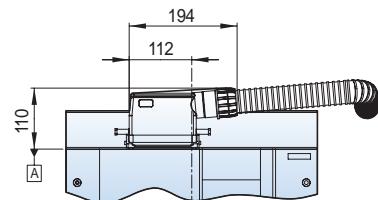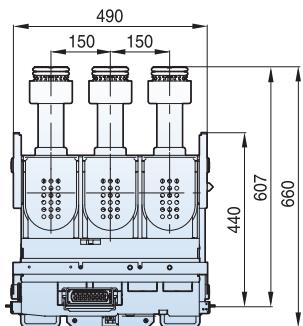



Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

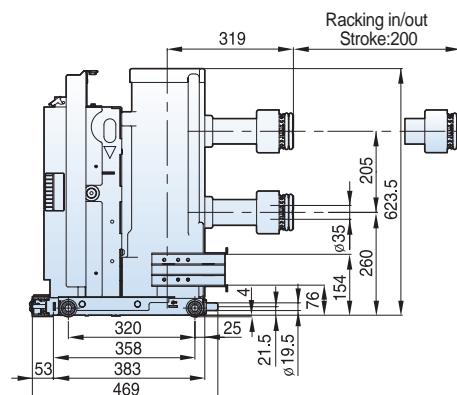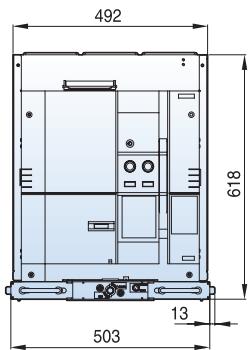

Withdrawable (H type unit, phase distance 210mm)

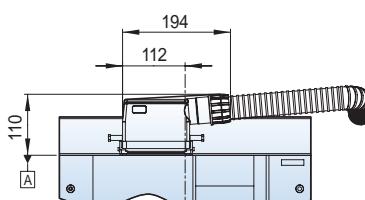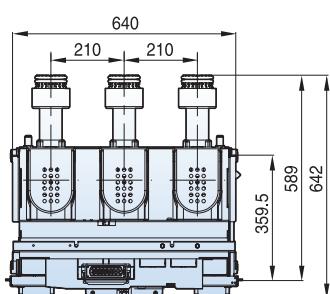


Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

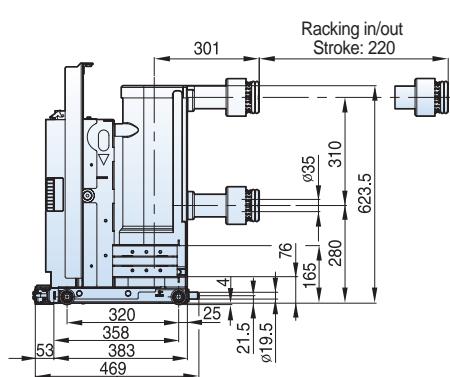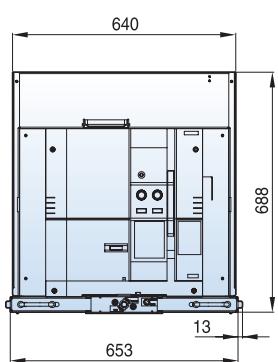

Susol

12/17.5kV, 20/25kA, 630/1250A

Withdrawable (H type cradle, phase distance 150mm)

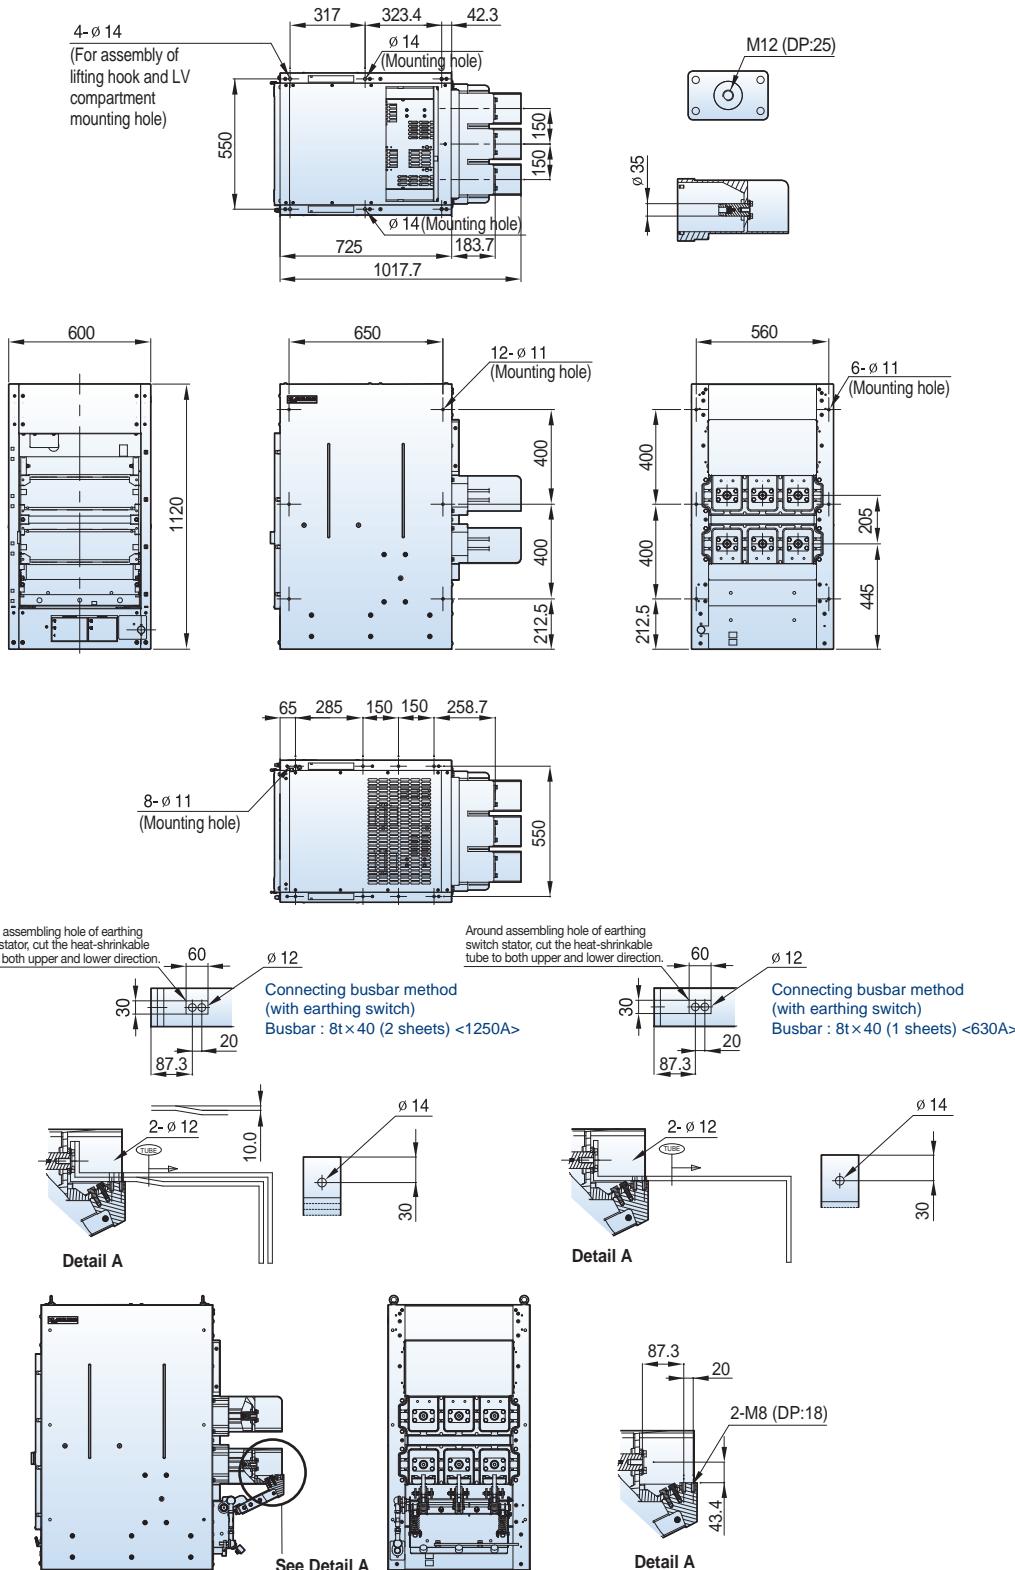




Dimensions - VL type

Susol

12/17.5kV, 20/25kA, 630/1250A

Drawable (H type cradle, phase distance 210mm)

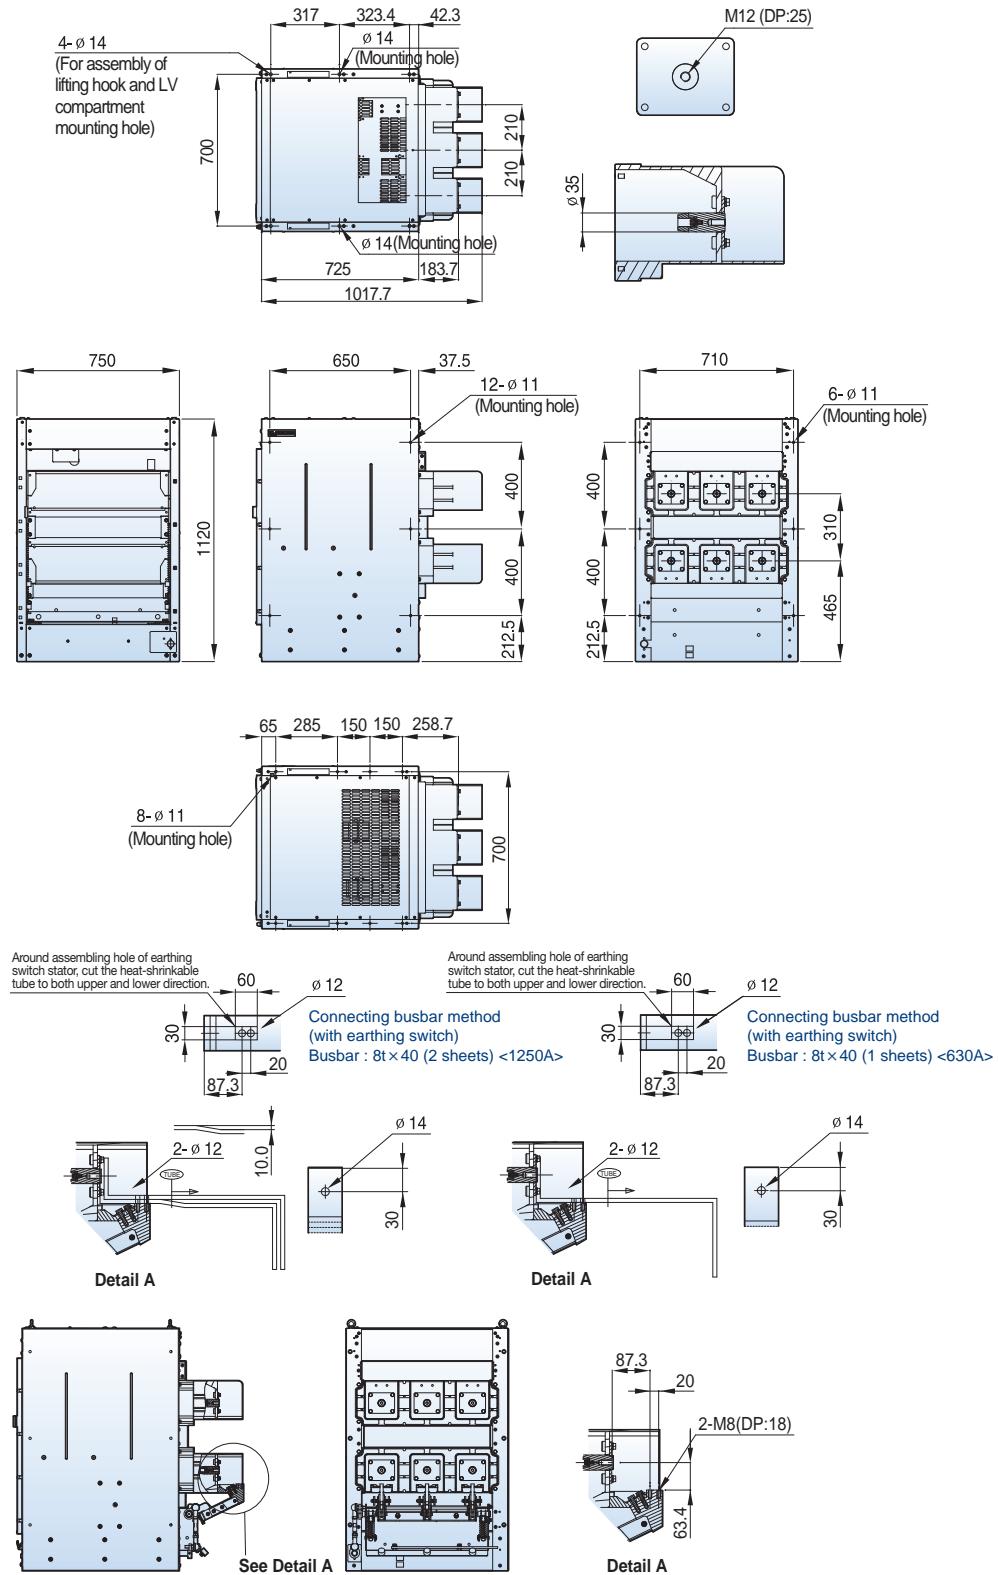


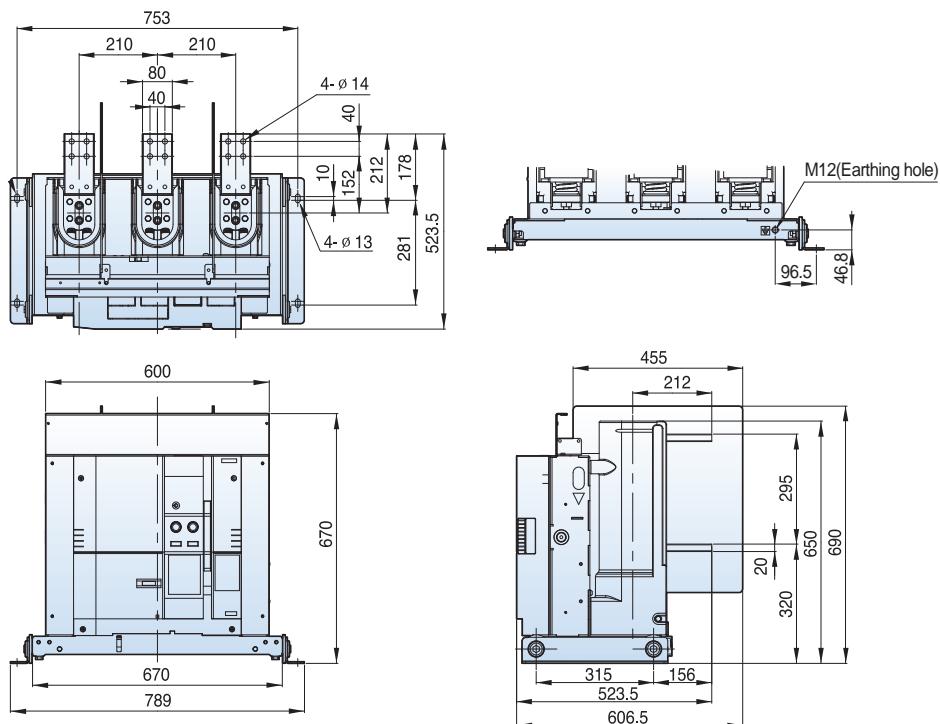
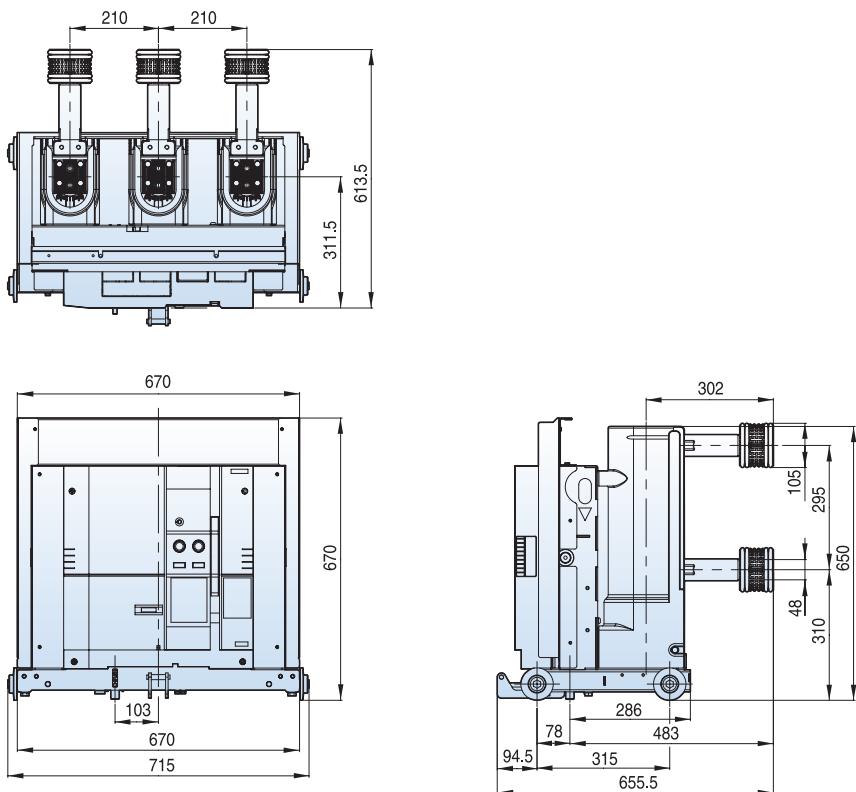
Susol**12/17.5kV, 20/25kA, 2000A****Fixed (P type, phase distance 210mm)****Withdrawable (E type unit, phase distance 210mm)**

Dimensions - VL typ





Susol

12/17.5kV, 20/25kA, 2000A


Withdrawable (F type unit, phase distance 210mm)

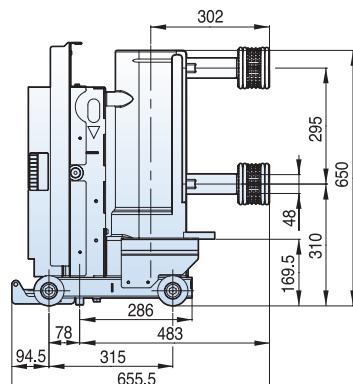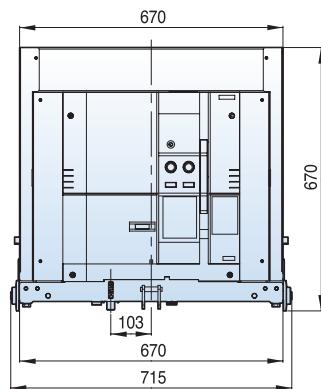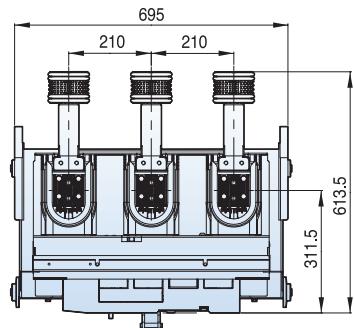

Withdrawable (E type cradle, phase distance 210mm)

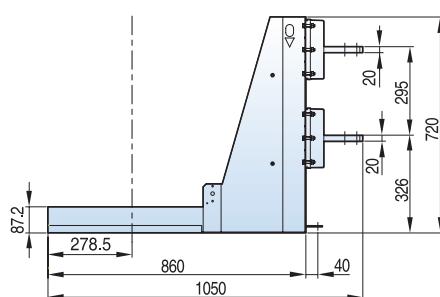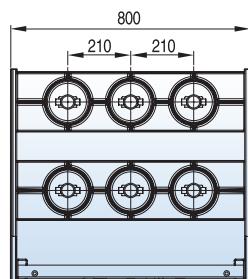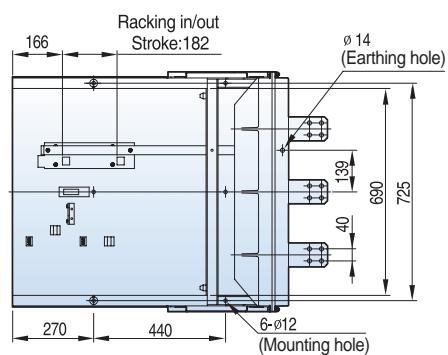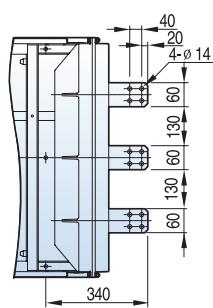

* Please be informed that the switchgear IP cover has to be back of —— mark.

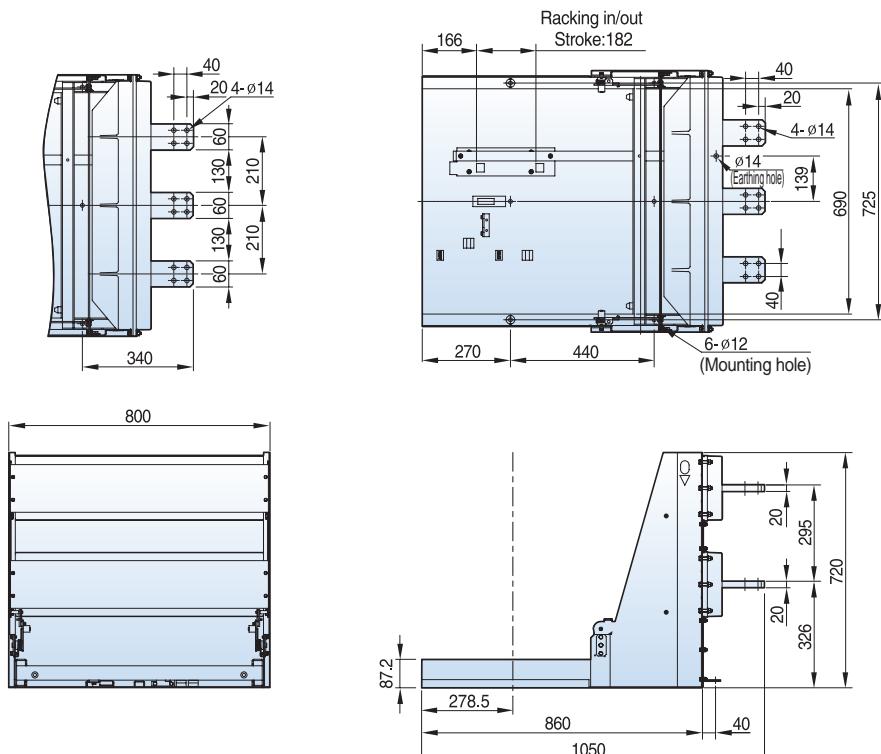Susol**12/17.5kV, 20/25kA, 2000A****Withdrawable (F type cradle, phase distance 210mm)**



* Please be informed that the switchgear IP cover has to be back of —— mark.

Dimensions - VL type



Susol

12/17.5kV, 20/25kA, 2000A



Withdrawable (H type unit, phase distance 150mm)

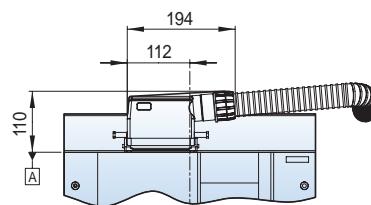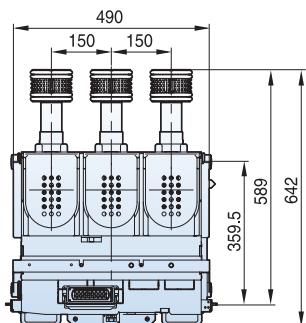



Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

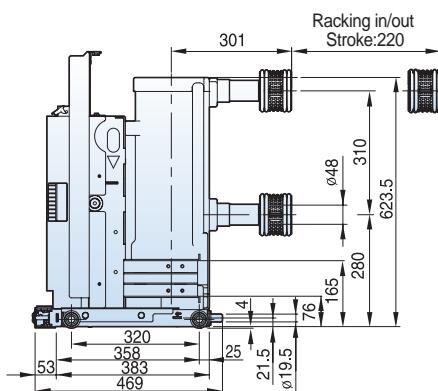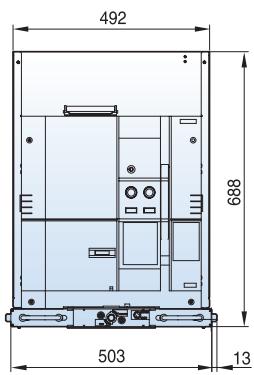


Withdrawable (H type unit, phase distance 210mm)

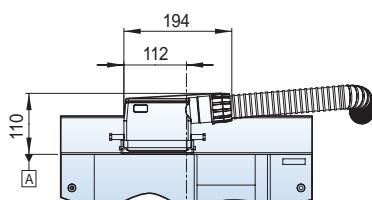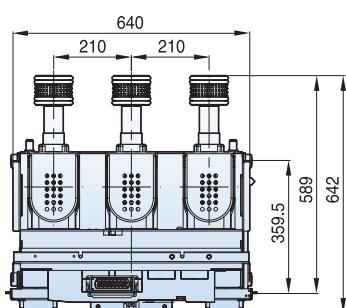

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

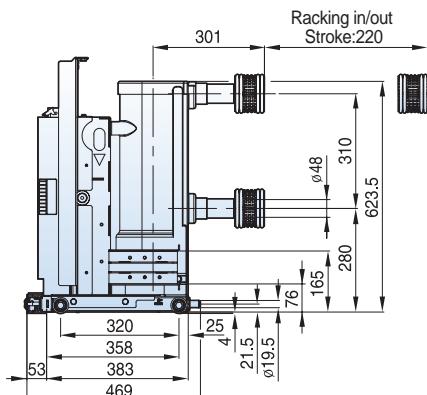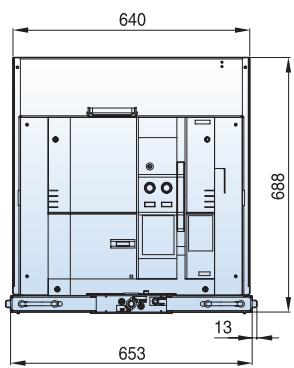

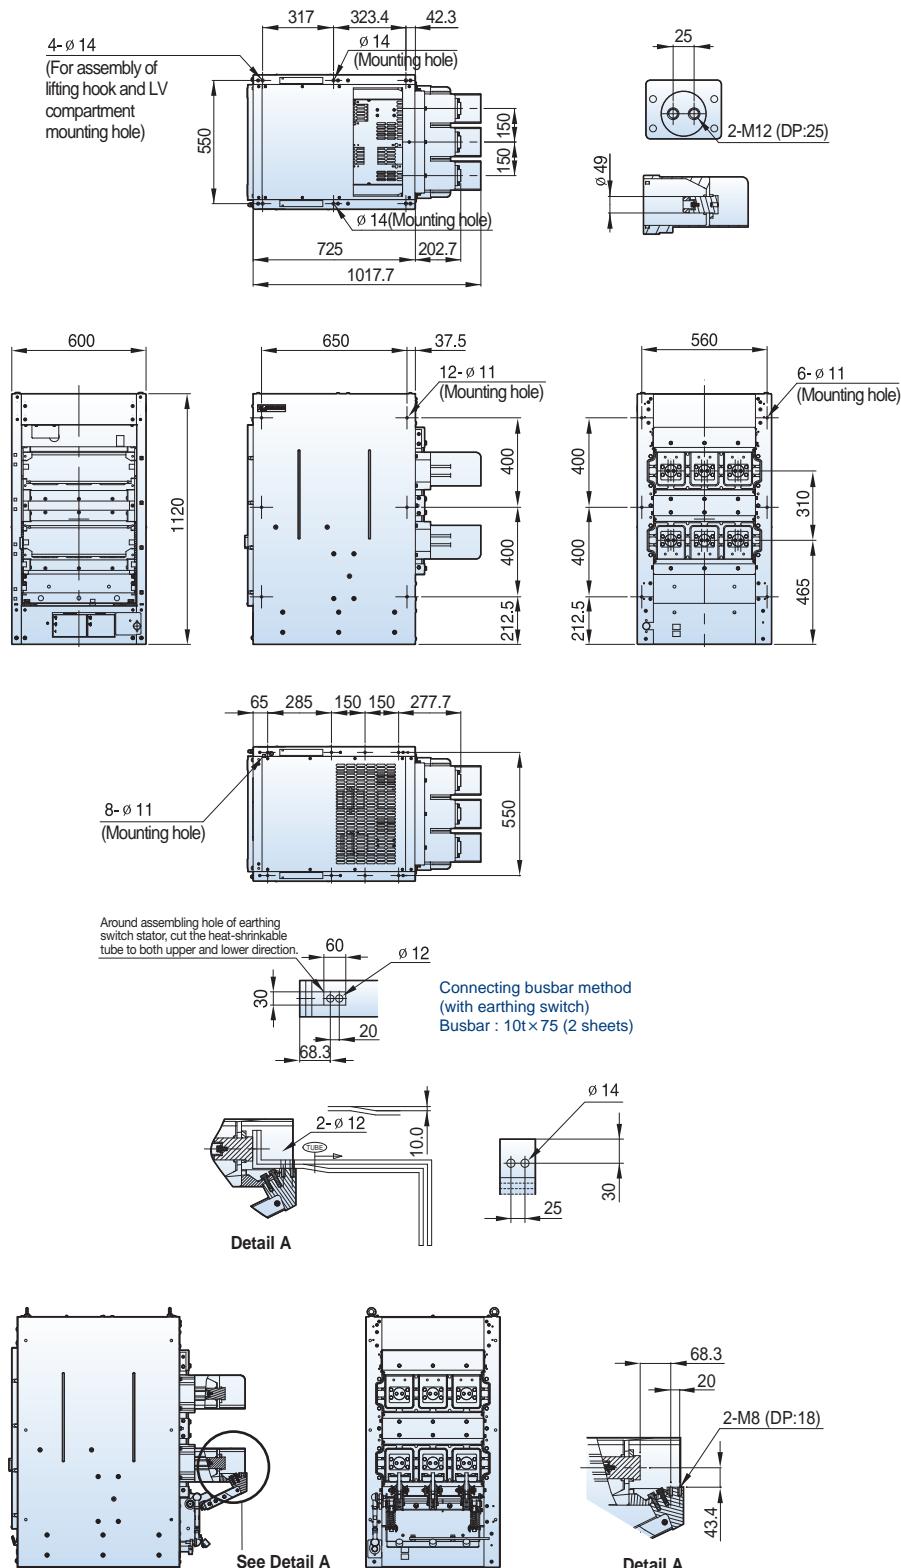
Susol**12/17.5kV, 20/25kA, 2000A****Withdrawable (H type cradle, phase distance 150mm)**



Dimensions - VL type

Susol

12/17.5kV, 20/25kA, 2000A

Withdrawable (H type cradle, phase distance 210mm)

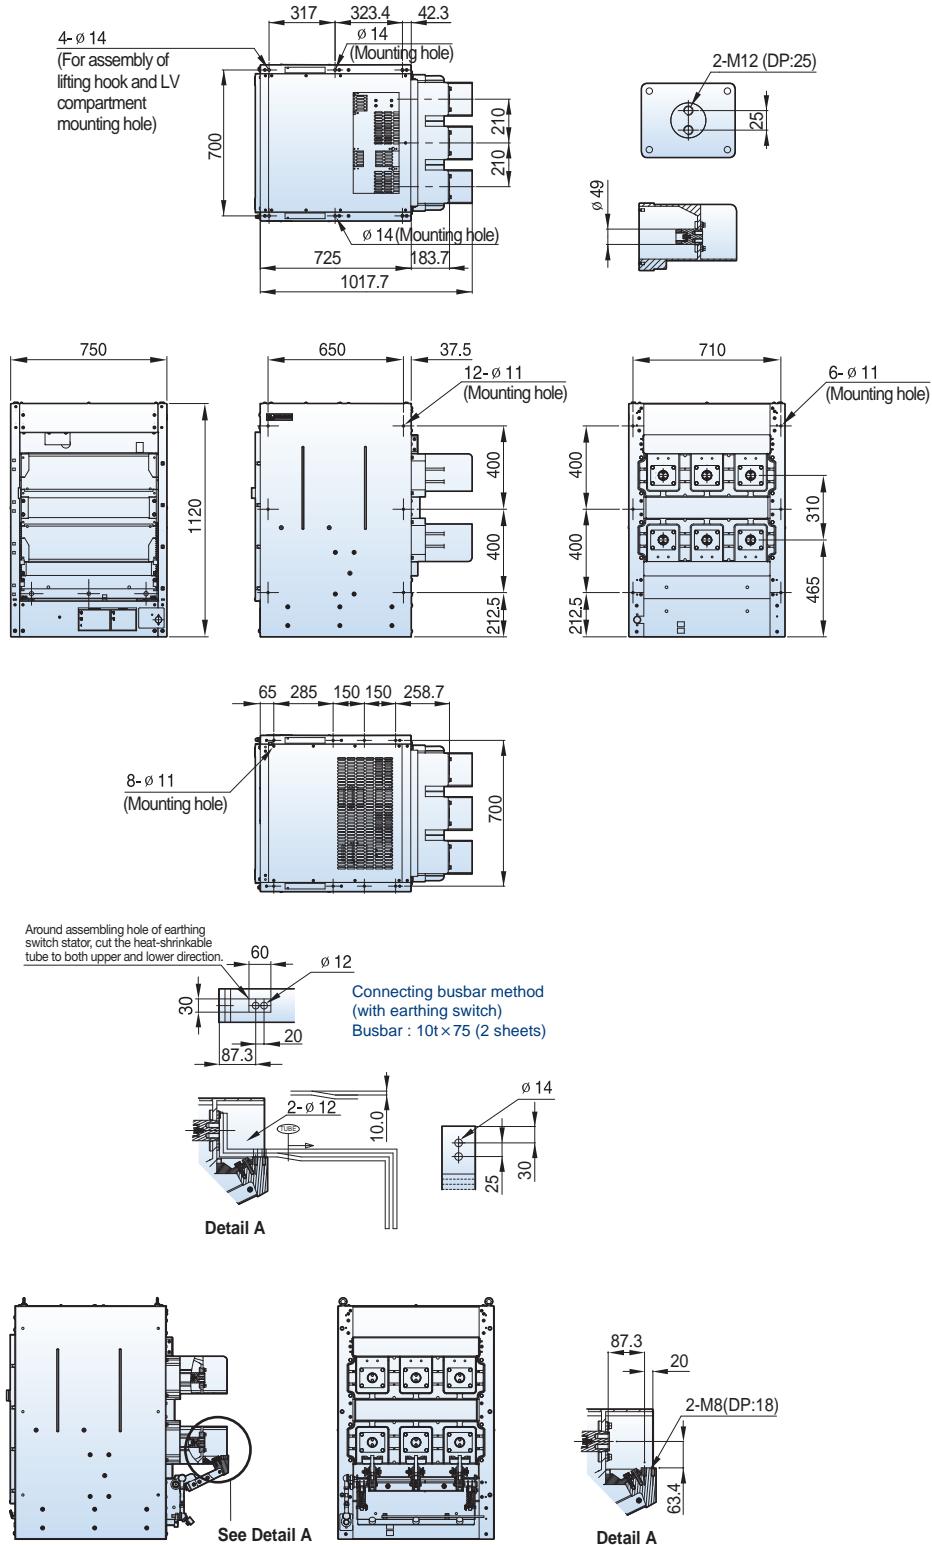

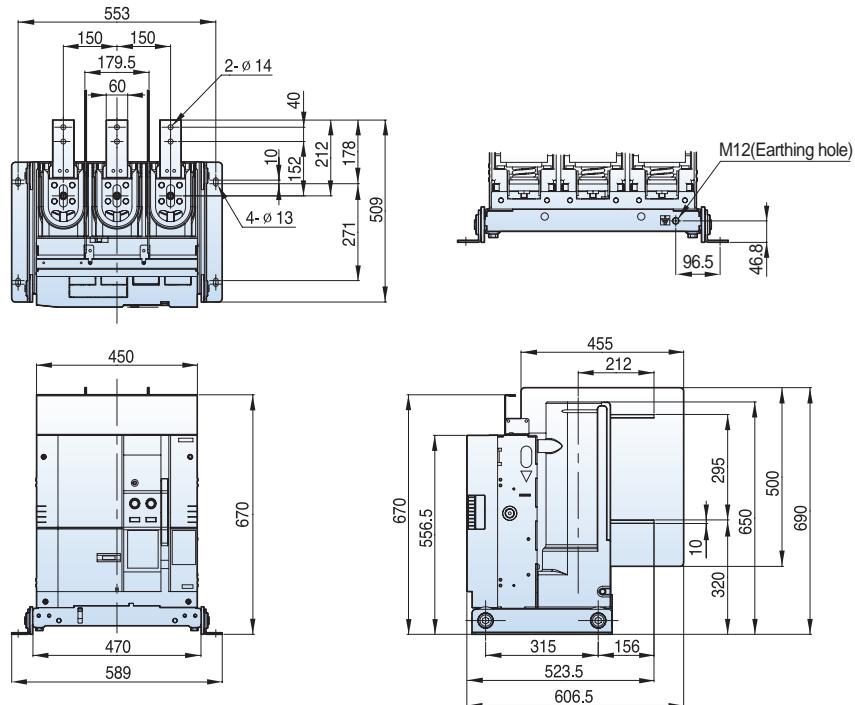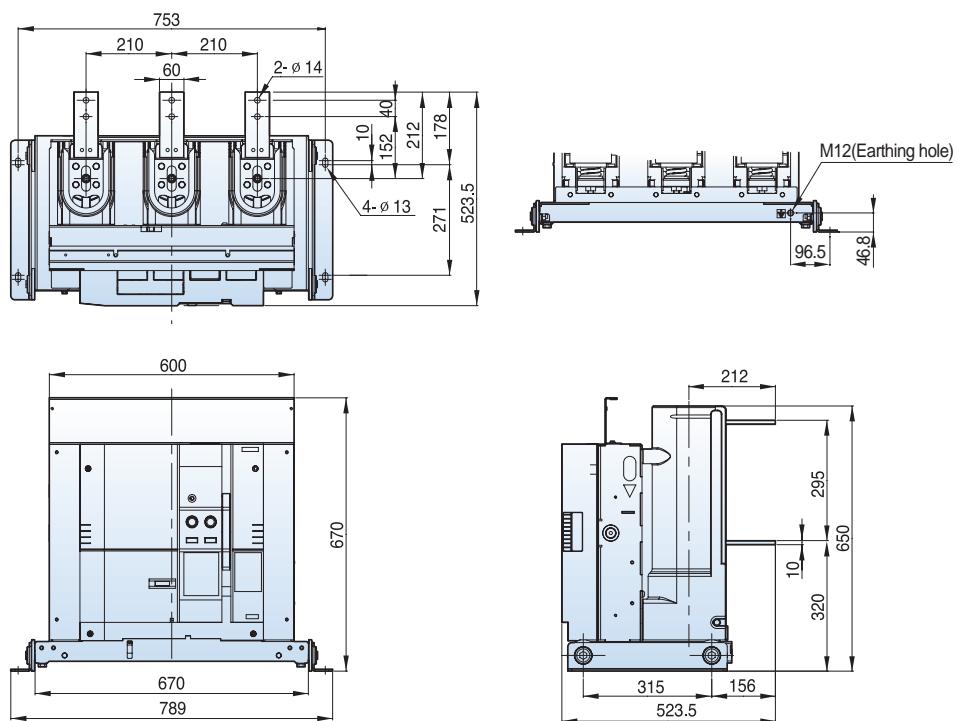
Susol**12/17.5kV, 31.5kA, 630/1250A****Fixed (P type, phase distance 150mm)****Fixed (P type, phase distance 210mm)**

Dimensions - VL type


Susol



7.2/12kV, 31.5kA, 1250/2000A

Withdrawable (Gs type unit, phase distance 150mm)

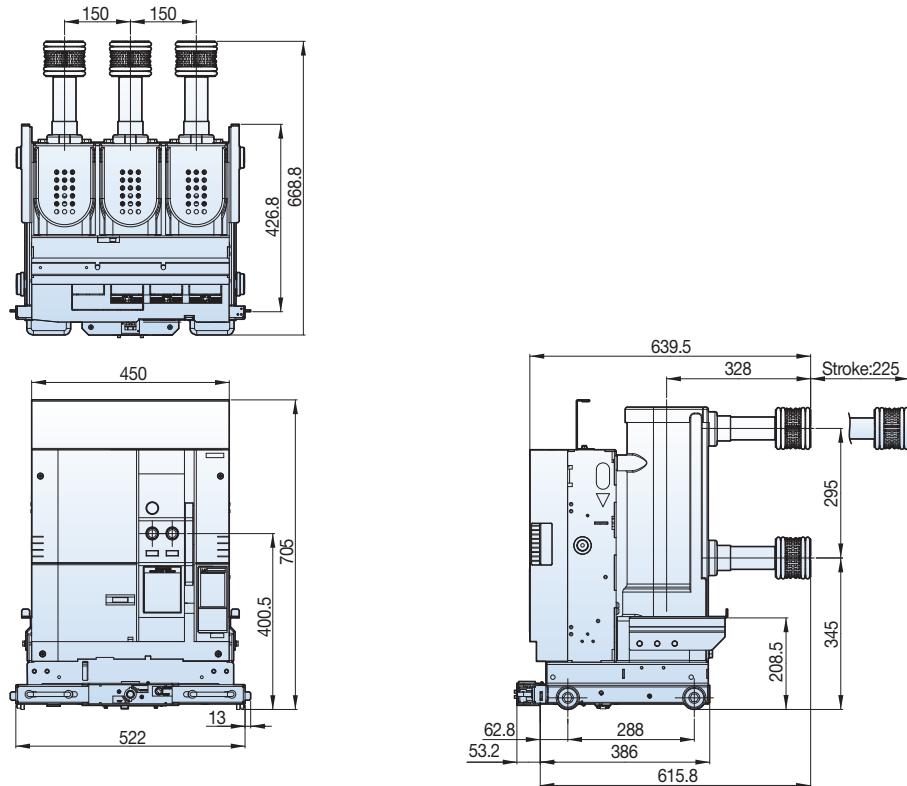

Withdrawable (Gs type cradle, phase distance 150mm)

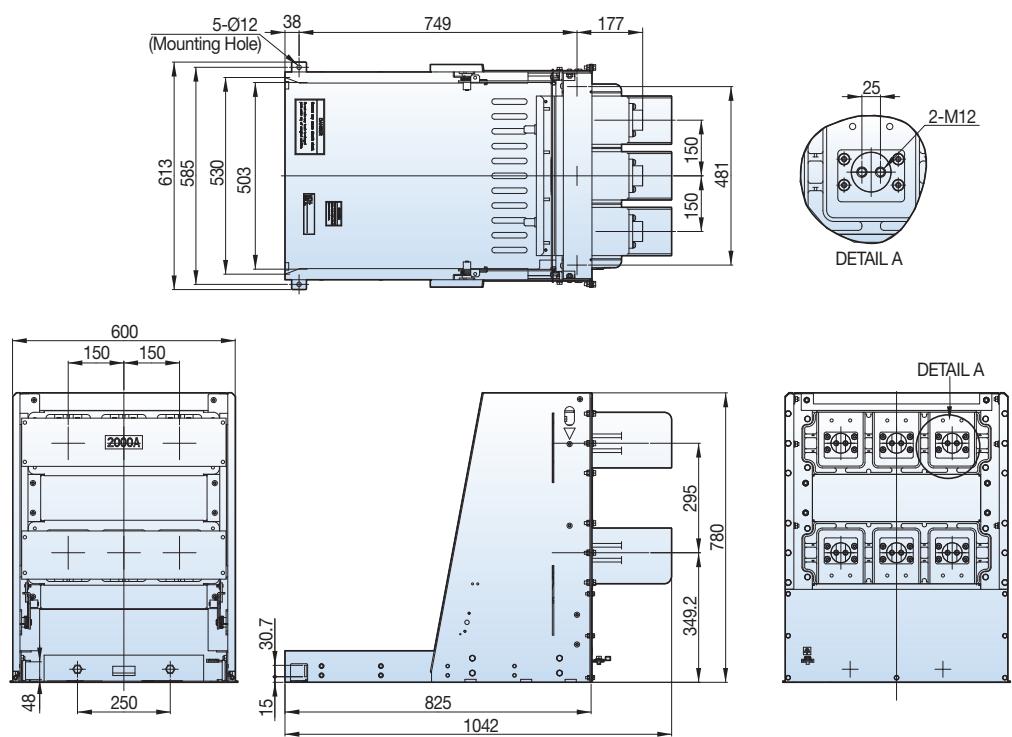

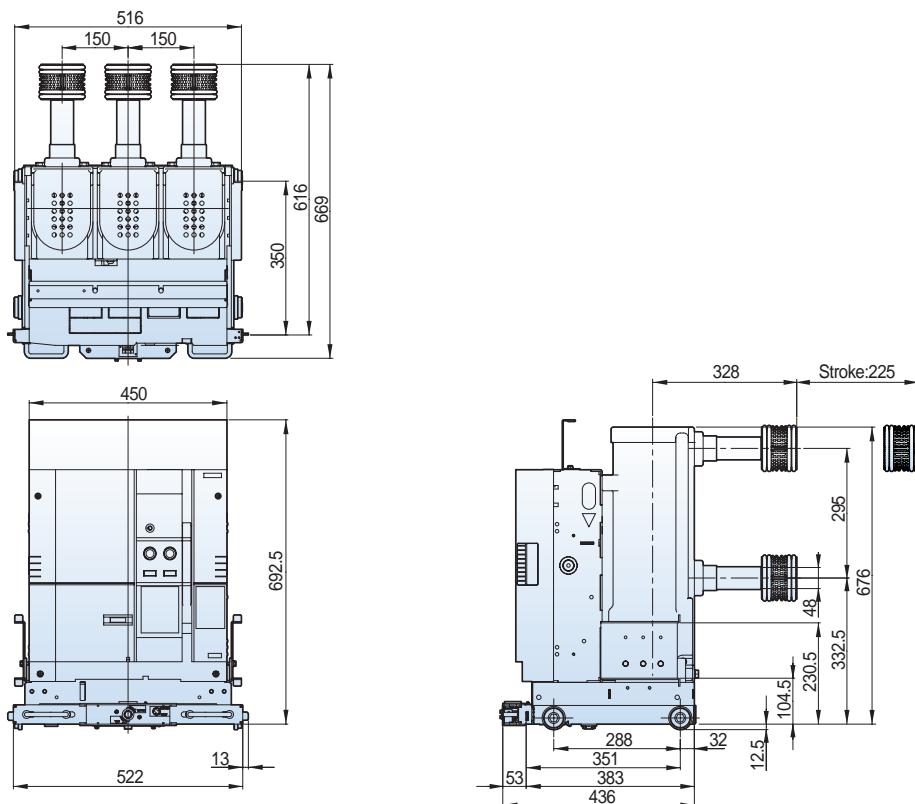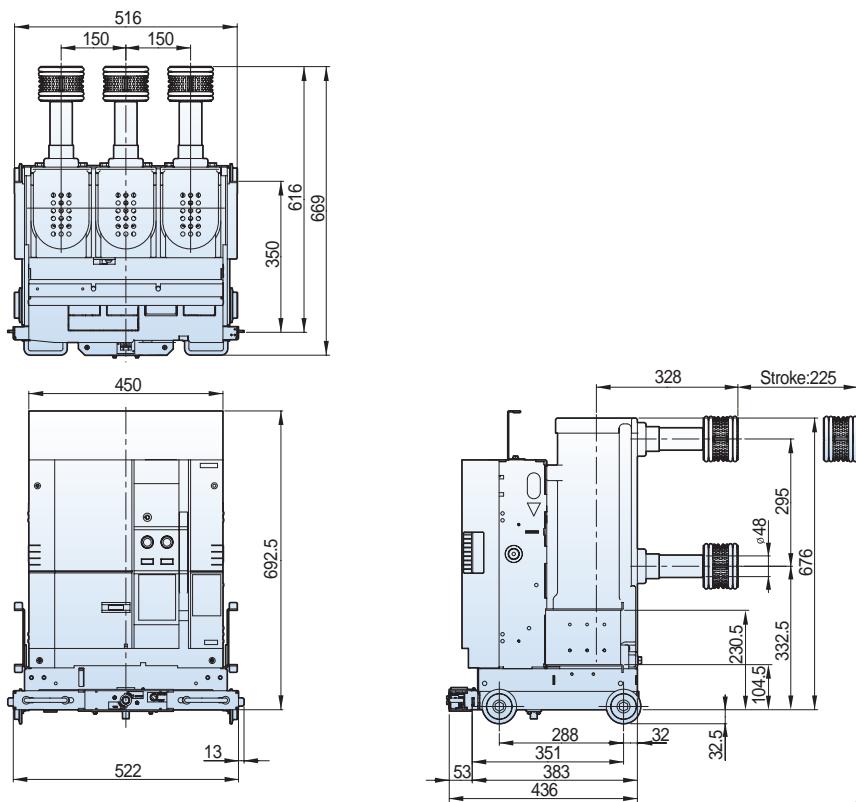
Susol**12kV, 31.5kA, 1250A****Withdrawable (K type unit T type, phase distance 150mm)****Withdrawable (K type unit T2 type, phase distance 150mm)**

Dimensions - VL type


Susol



12kV, 31.5kA, 1250A

Withdrawable (G type cradle T type, phase distance 150mm)

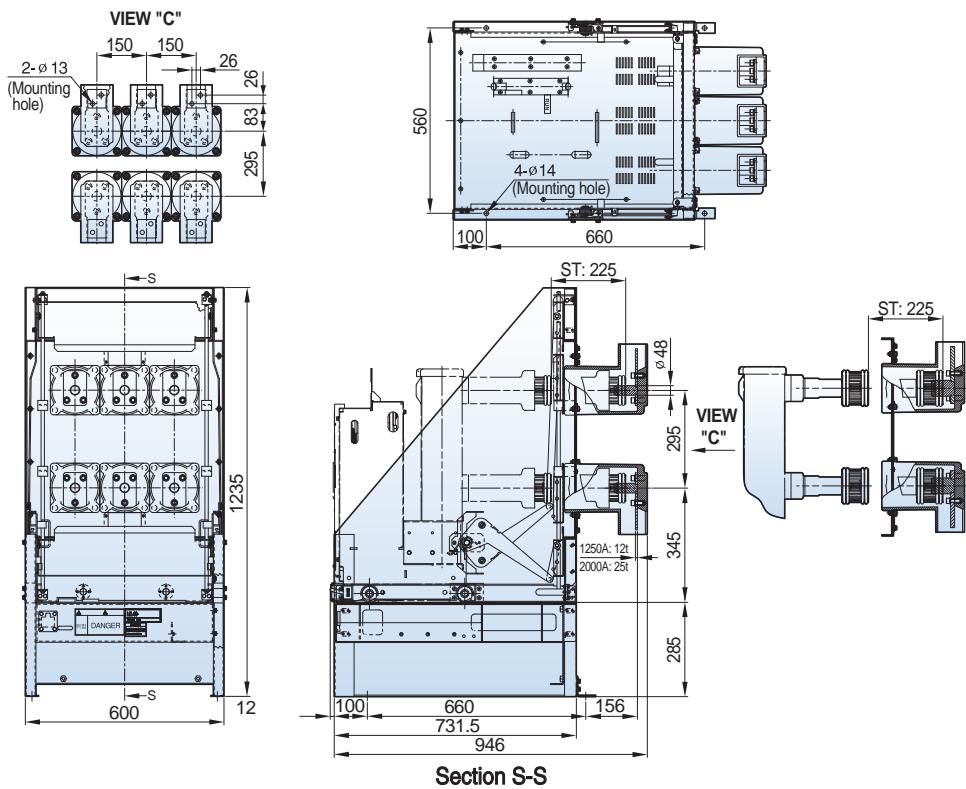

Withdrawable (MCSG cradle T2 type, phase distance 150mm)

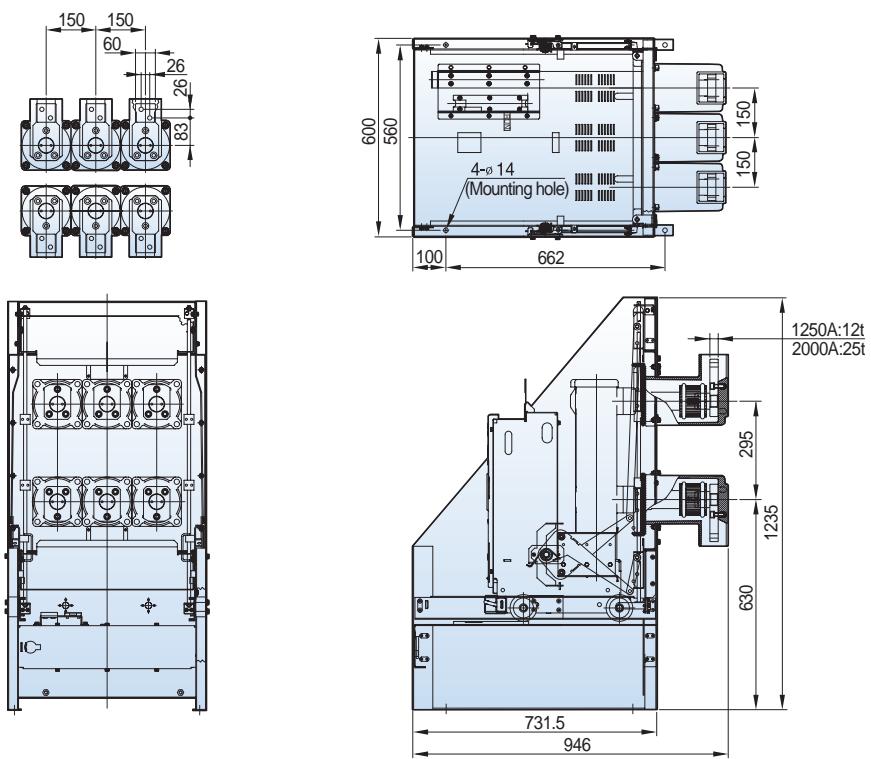

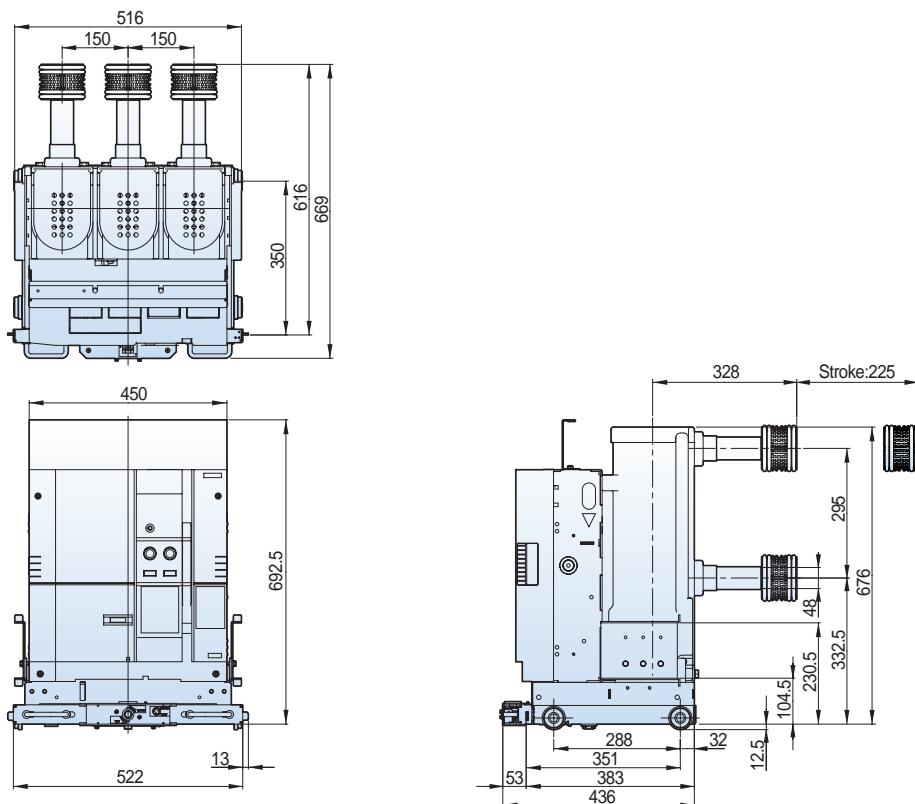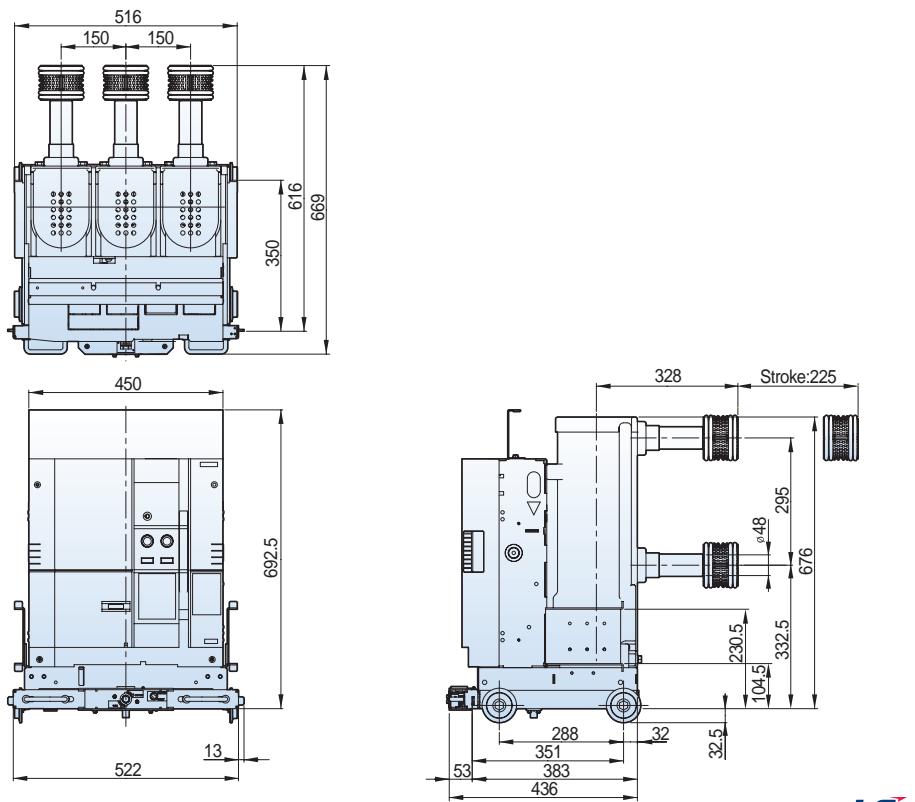
Susol**12kV, 31.5kA, 2000A****Withdrawable (K type unit T type, phase distance 150mm)****Withdrawable (K type unit T2 type, phase distance 150mm)**

Dimensions - VL type


Susol



12kV, 31.5kA, 2000A

Withdrawable (G type cradle T type, phase distance 150mm)




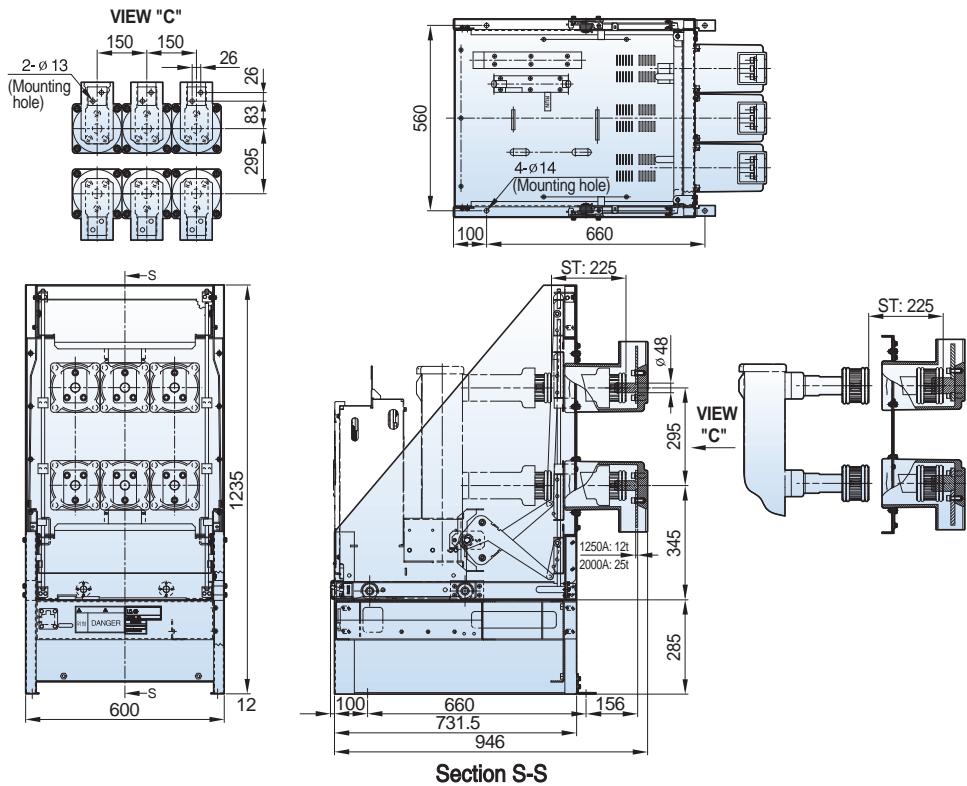


Withdrawable (MCSG cradle T2 type, phase distance 150mm)


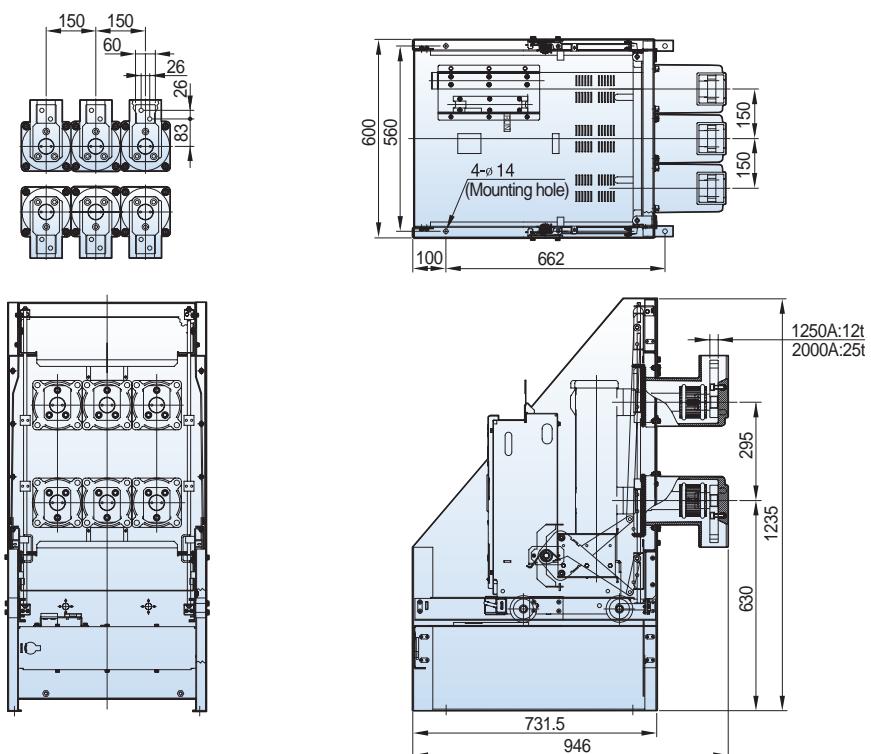


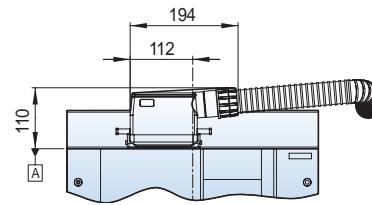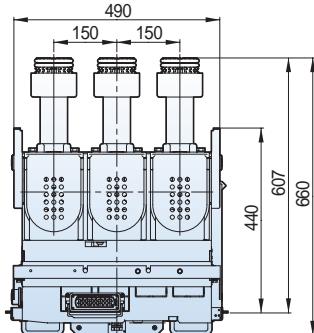Susol**12/17.5kV, 31.5kA, 630/1250A****Withdrawable (H type unit, phase distance 150mm)**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

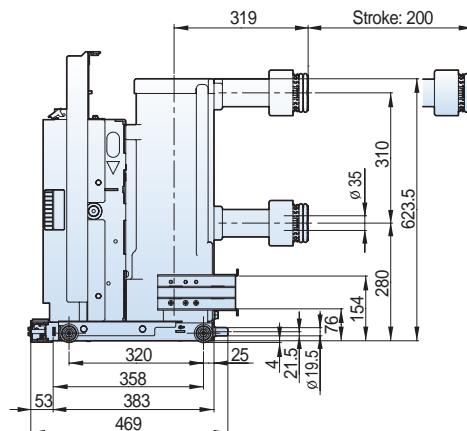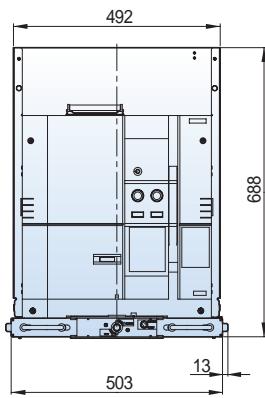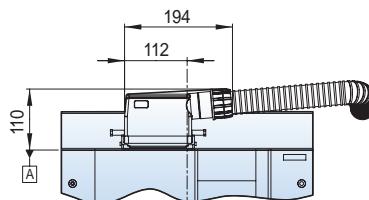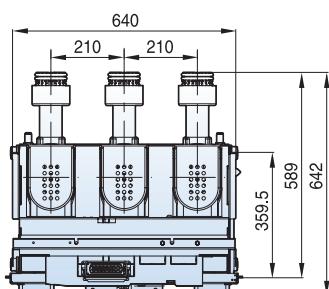**Withdrawable (H type unit, phase distance 210mm)**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

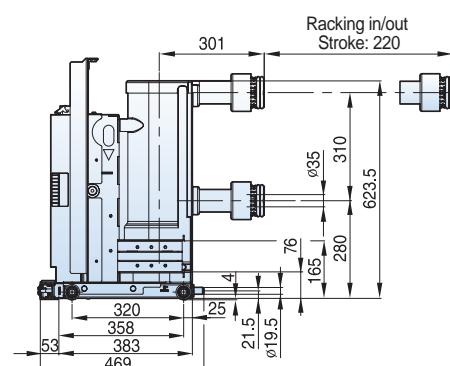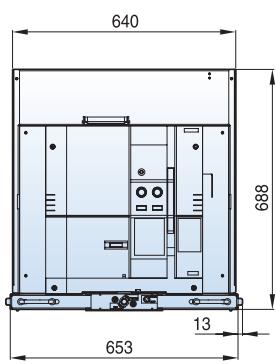










Dimensions - VL type

Susol

12/17.5kV, 31.5kA, 630/1250A

Withdrawable (H type cradle, phase distance 150mm)

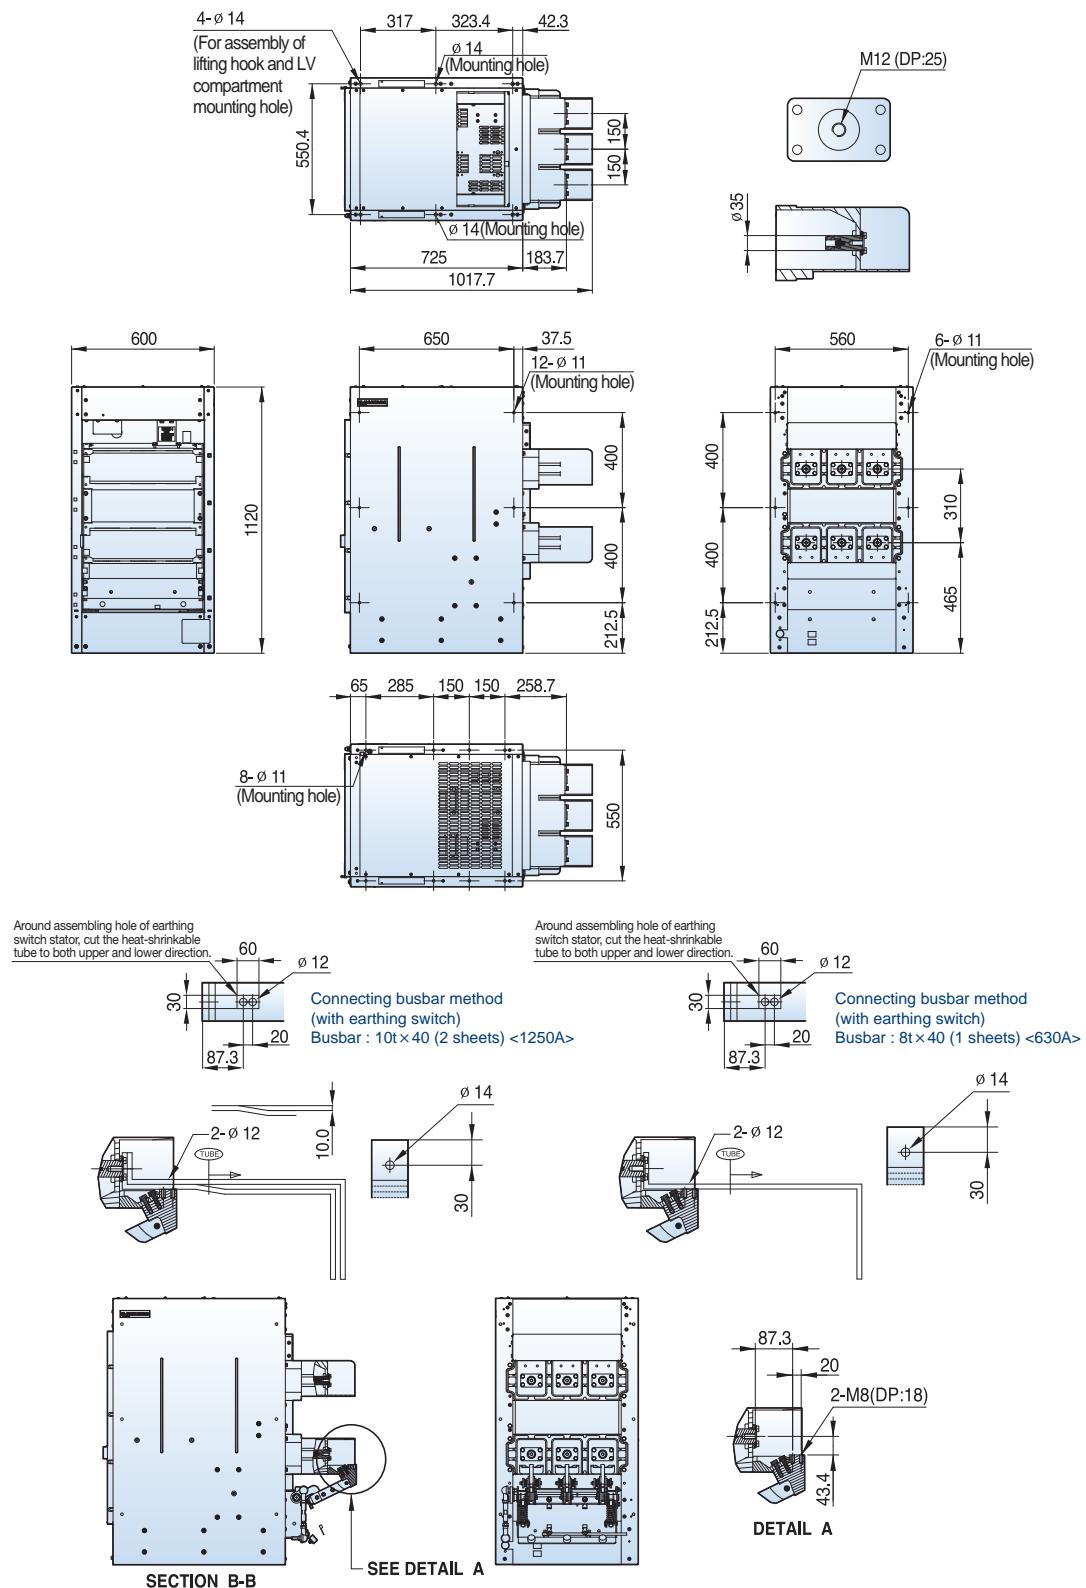

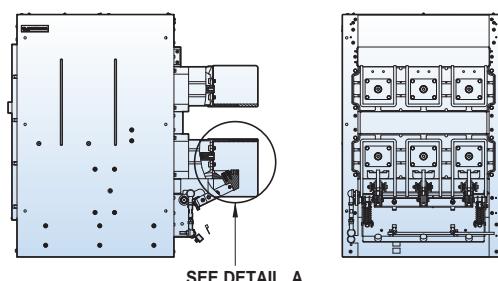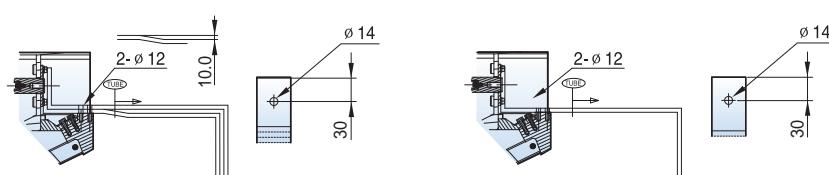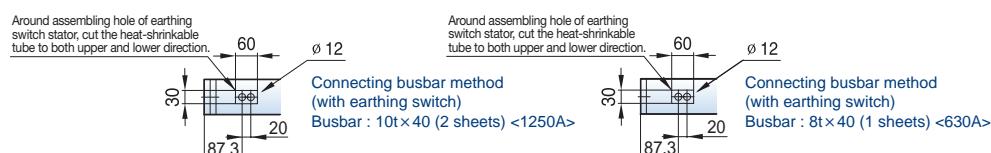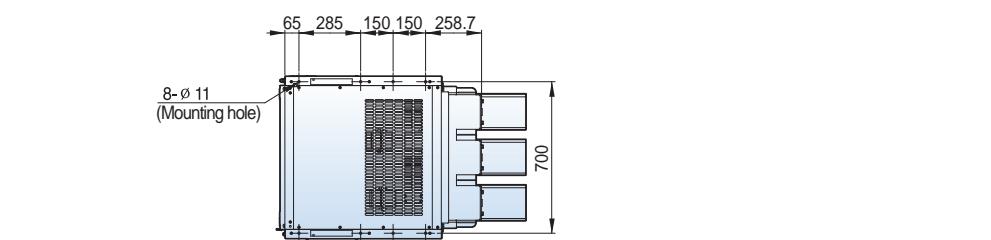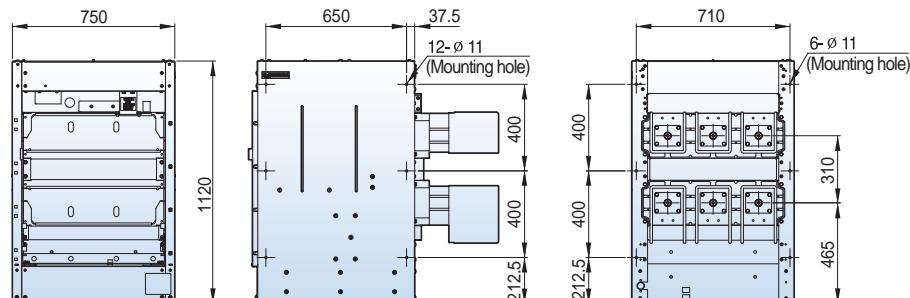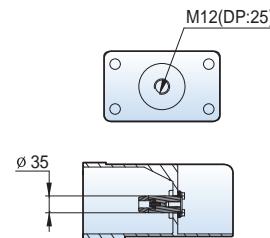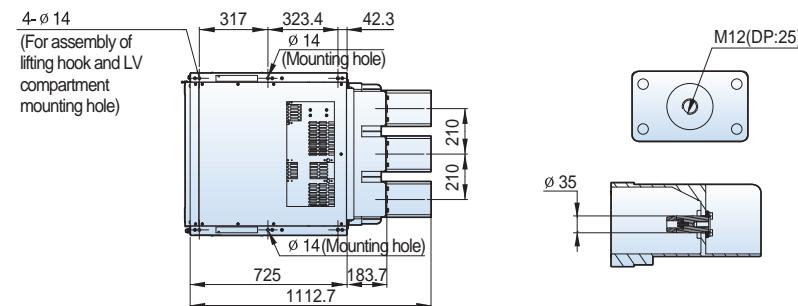Susol**12/17.5kV, 31.5kA, 630/1250A****Withdrawable (H type cradle, phase distance 210mm)**


DETAIL A
SCALE 2/15

Dimensions - VL type


Susol



12/17.5kV, 31.5kA, 2000A

Fixed (P type, phase distance 210mm)


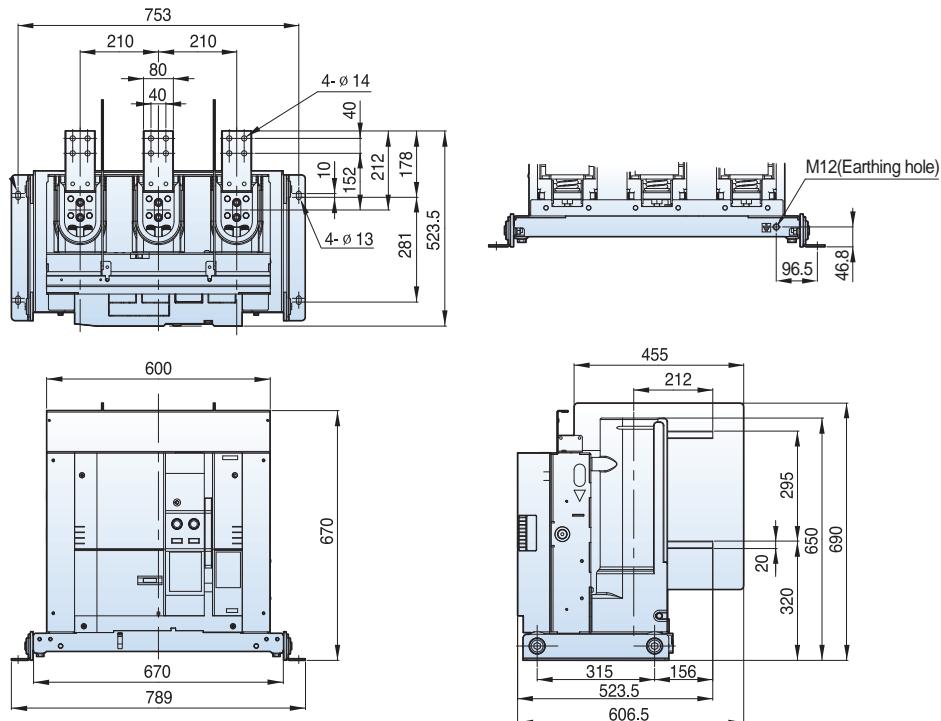


Withdrawable (H type unit, phase distance 150mm)

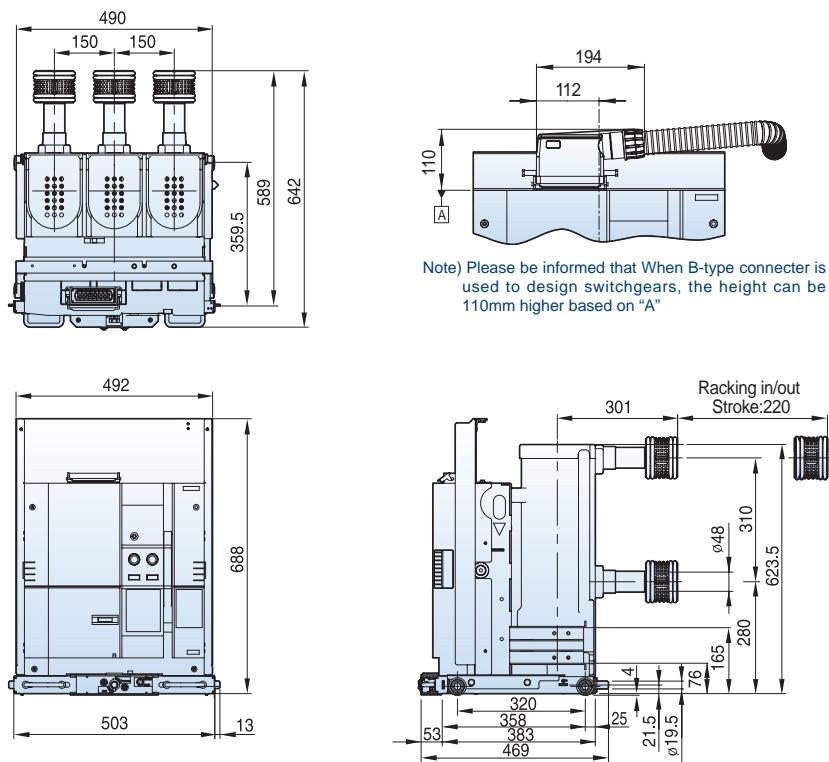

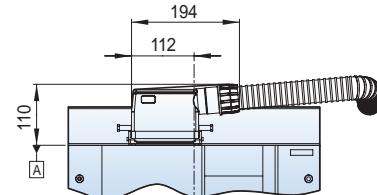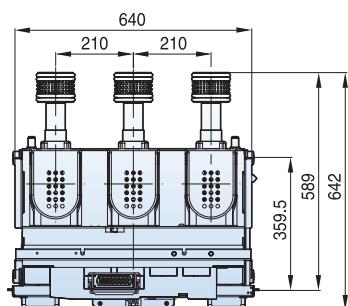Susol**12/17.5kV, 31.5kA, 2000A****Withdrawable (H type unit, phase distance 210mm)**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

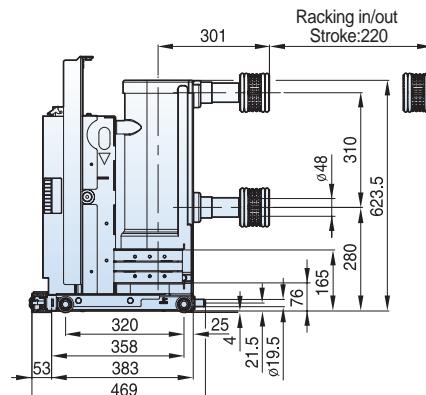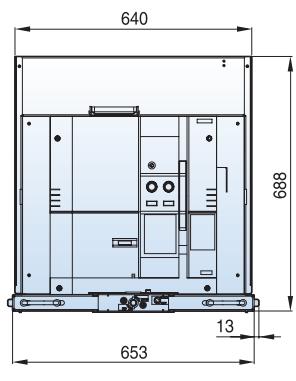


Dimensions - VL type


Susol

12/17.5kV, 31.5kA, 2000A

Withdrawable (H type cradle, phase distance 150mm)

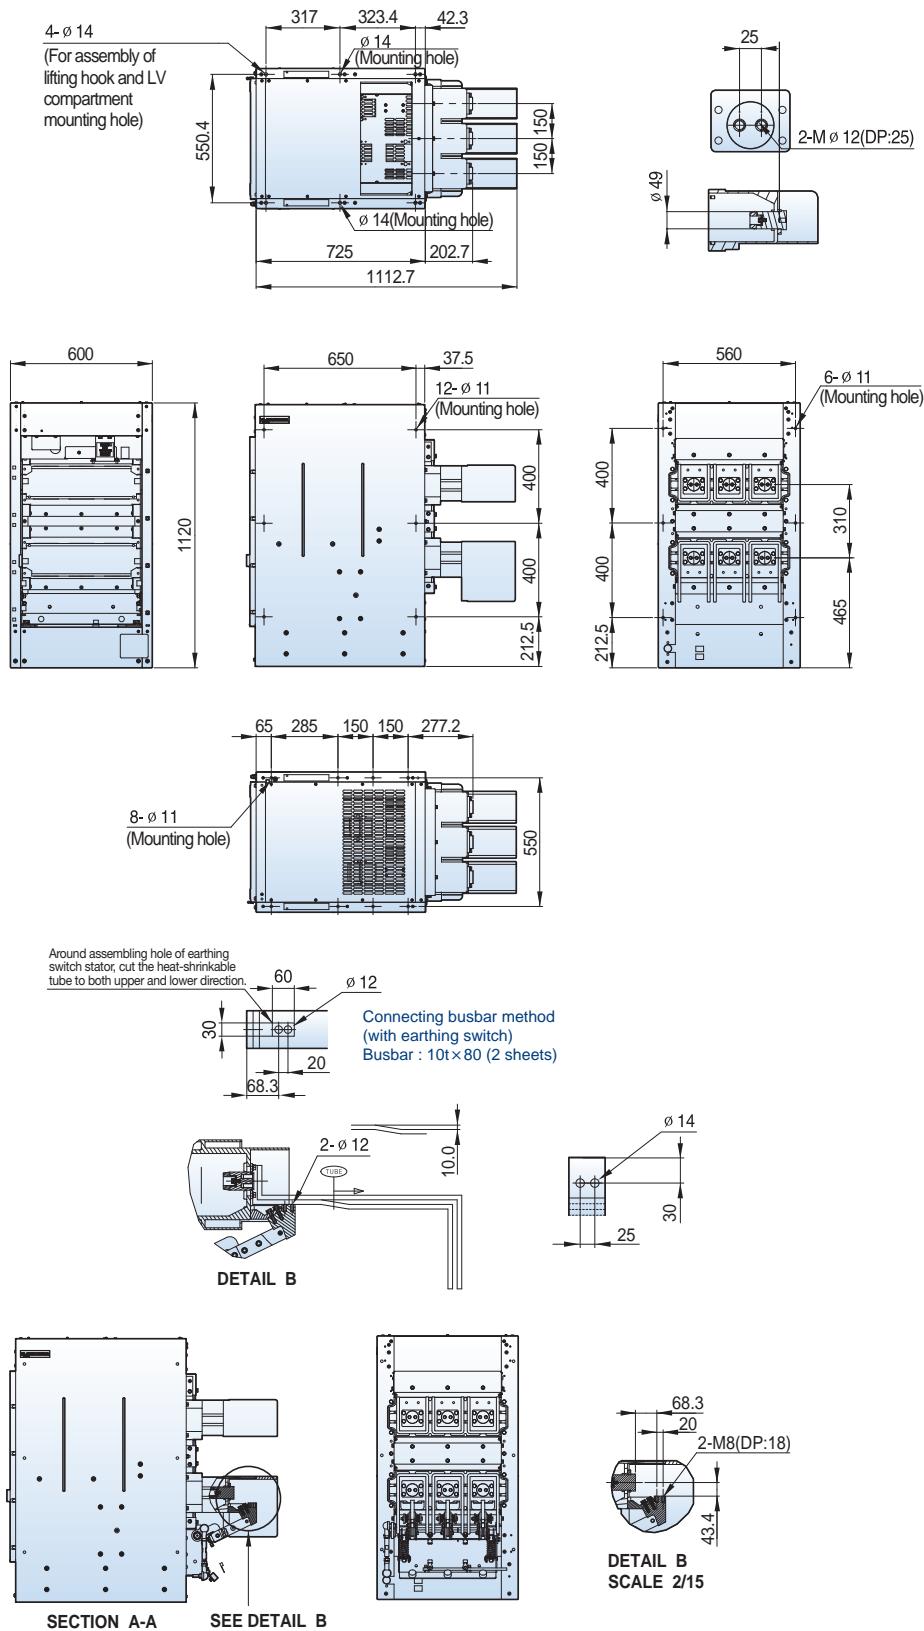

Susol

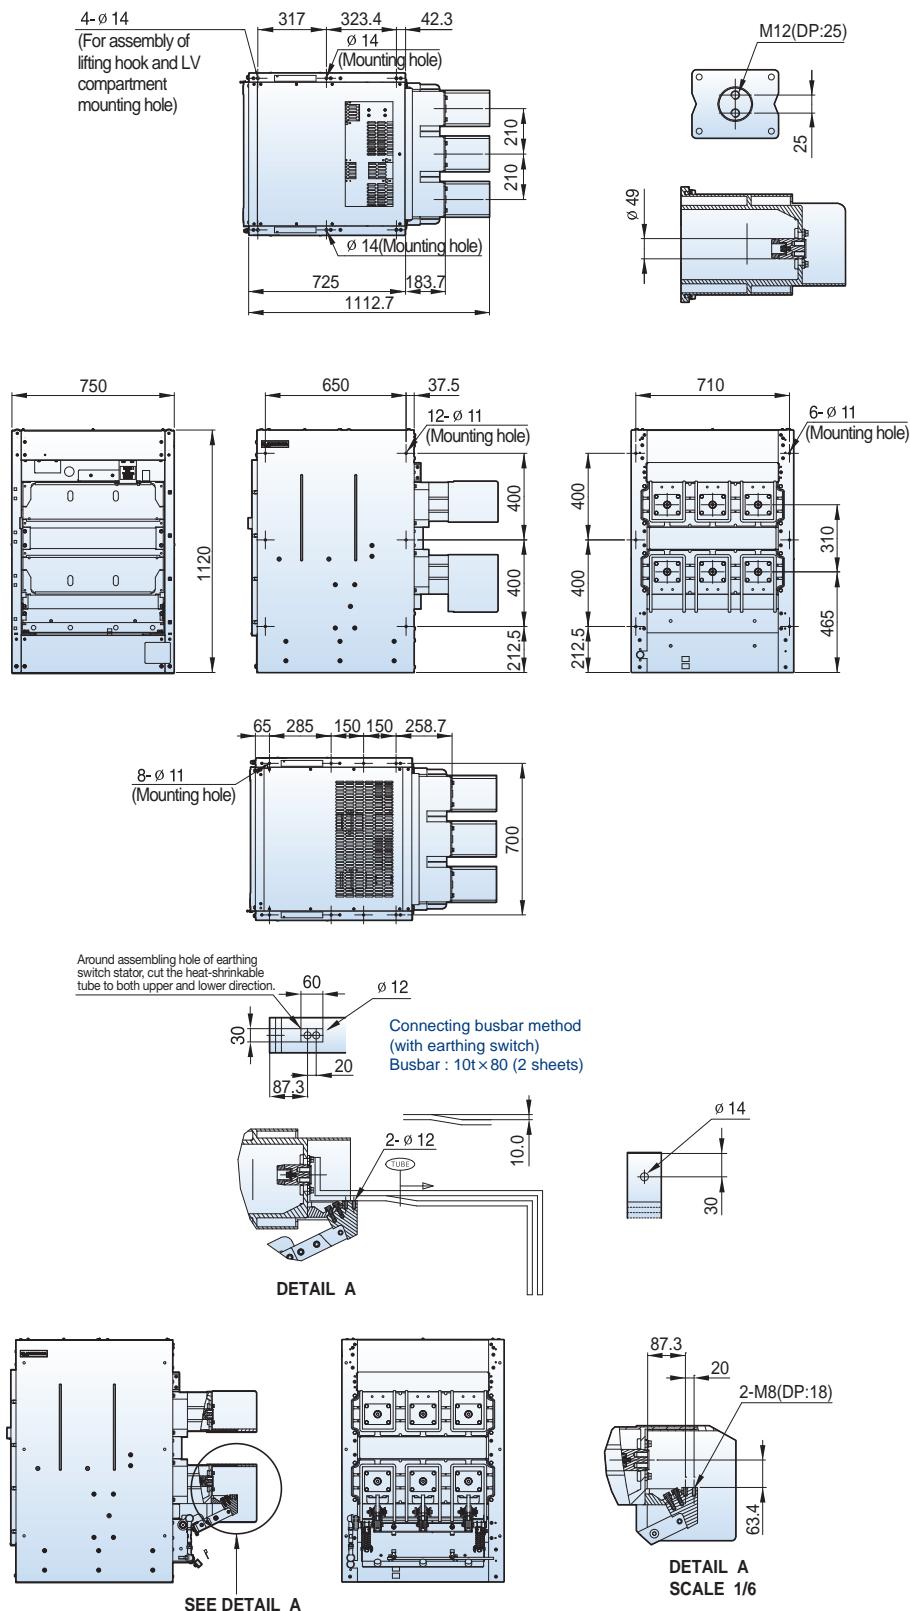
12/17.5kV, 31.5kA, 2000A**Withdrawable (H type cradle, phase distance 210mm)**

Dimensions - VL type


Susol



12/17.5kV, 31.5kA, 2500A

Fixed (P type, phase distance 210mm)

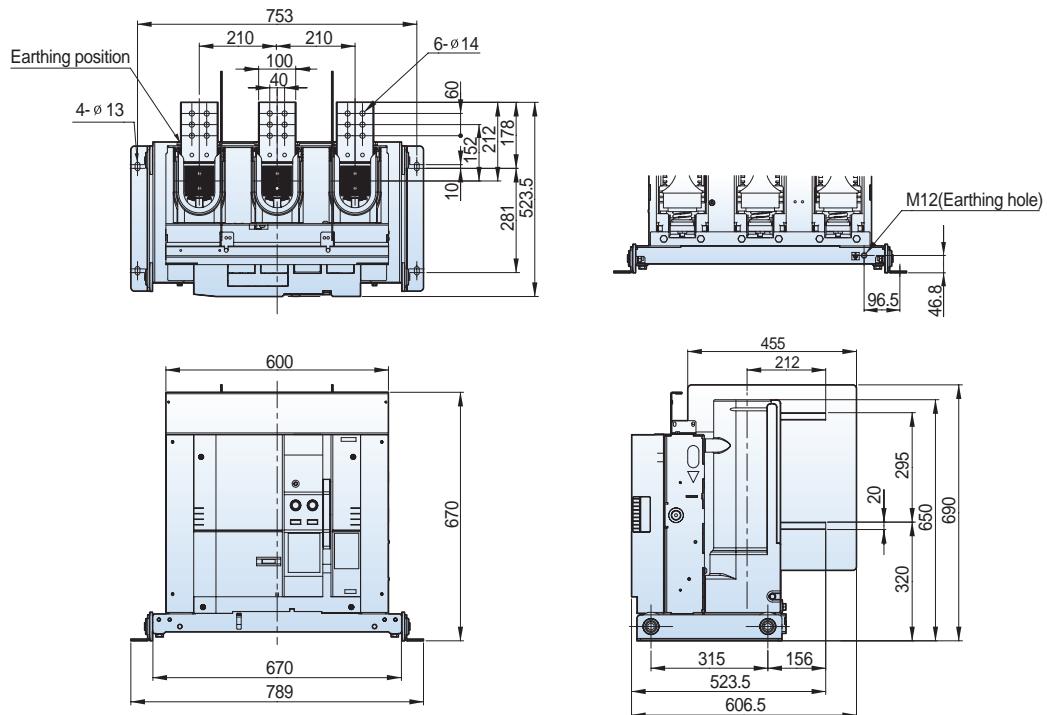

Fixed (P type, phase distance 275mm)

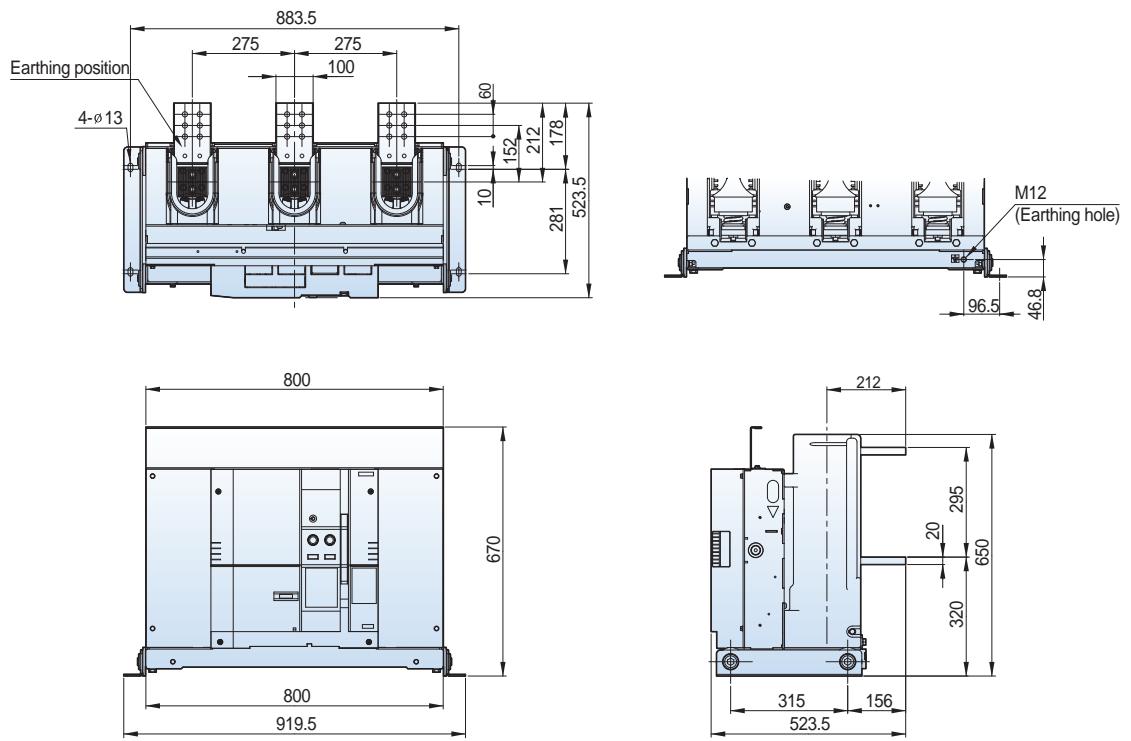

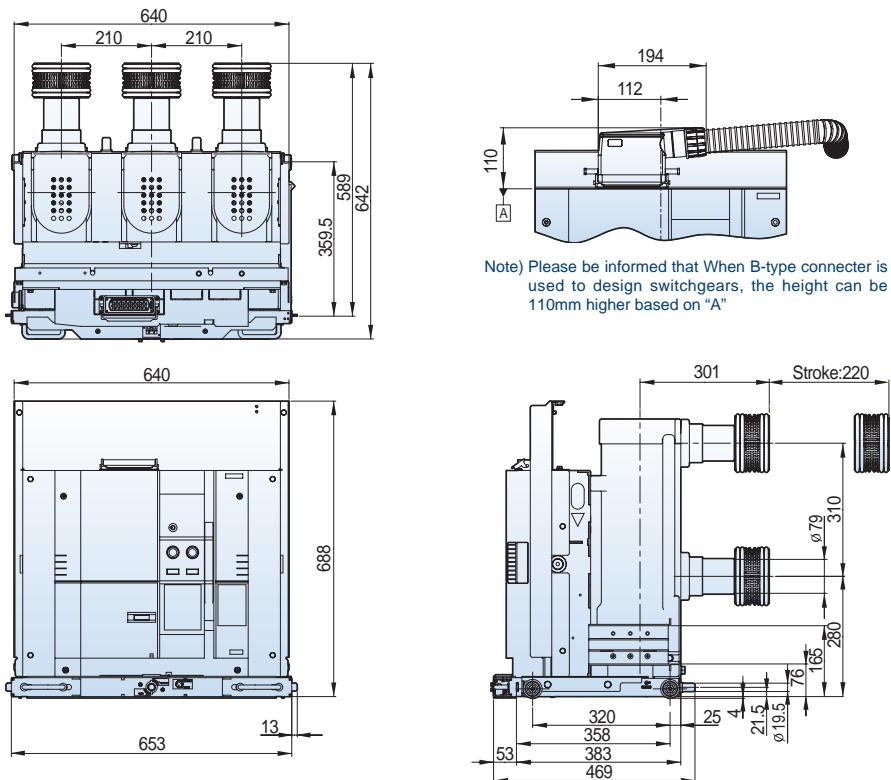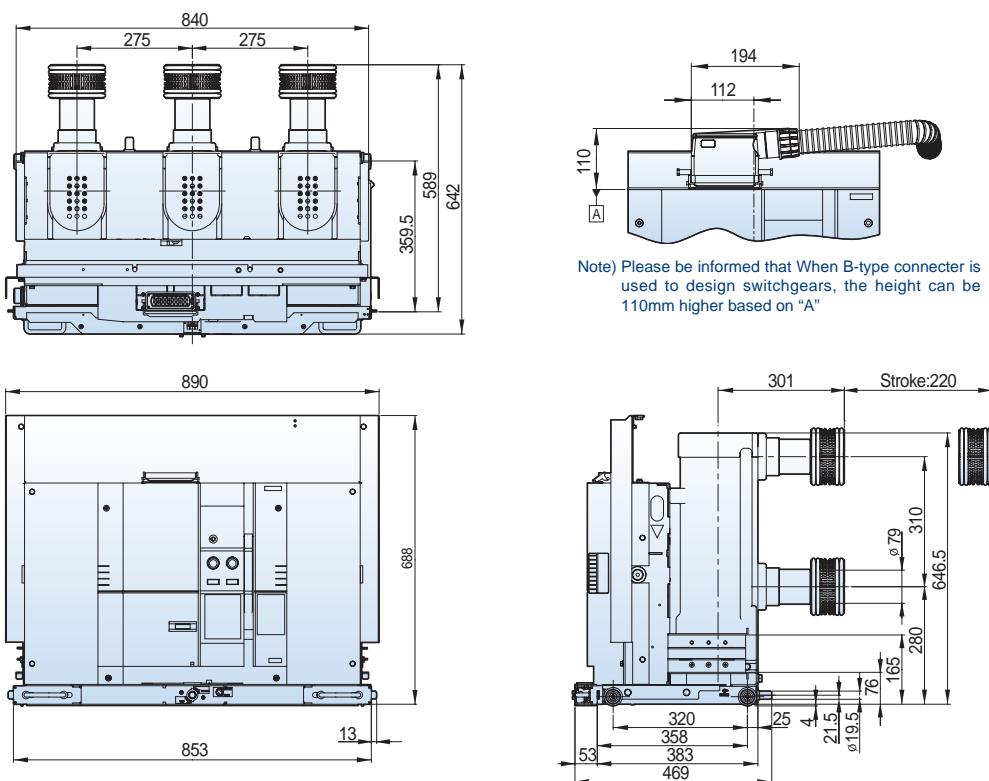
Susol**12/17.5kV, 31.5kA, 2500A****Withdrawable (H type unit, phase distance 210mm)****Withdrawable (H type unit, phase distance 275mm)**

Dimensions - VL type

Susol

12/17.5kV, 31.5A, 2500A


Withdrawable (H type cradle, phase distance 210mm)

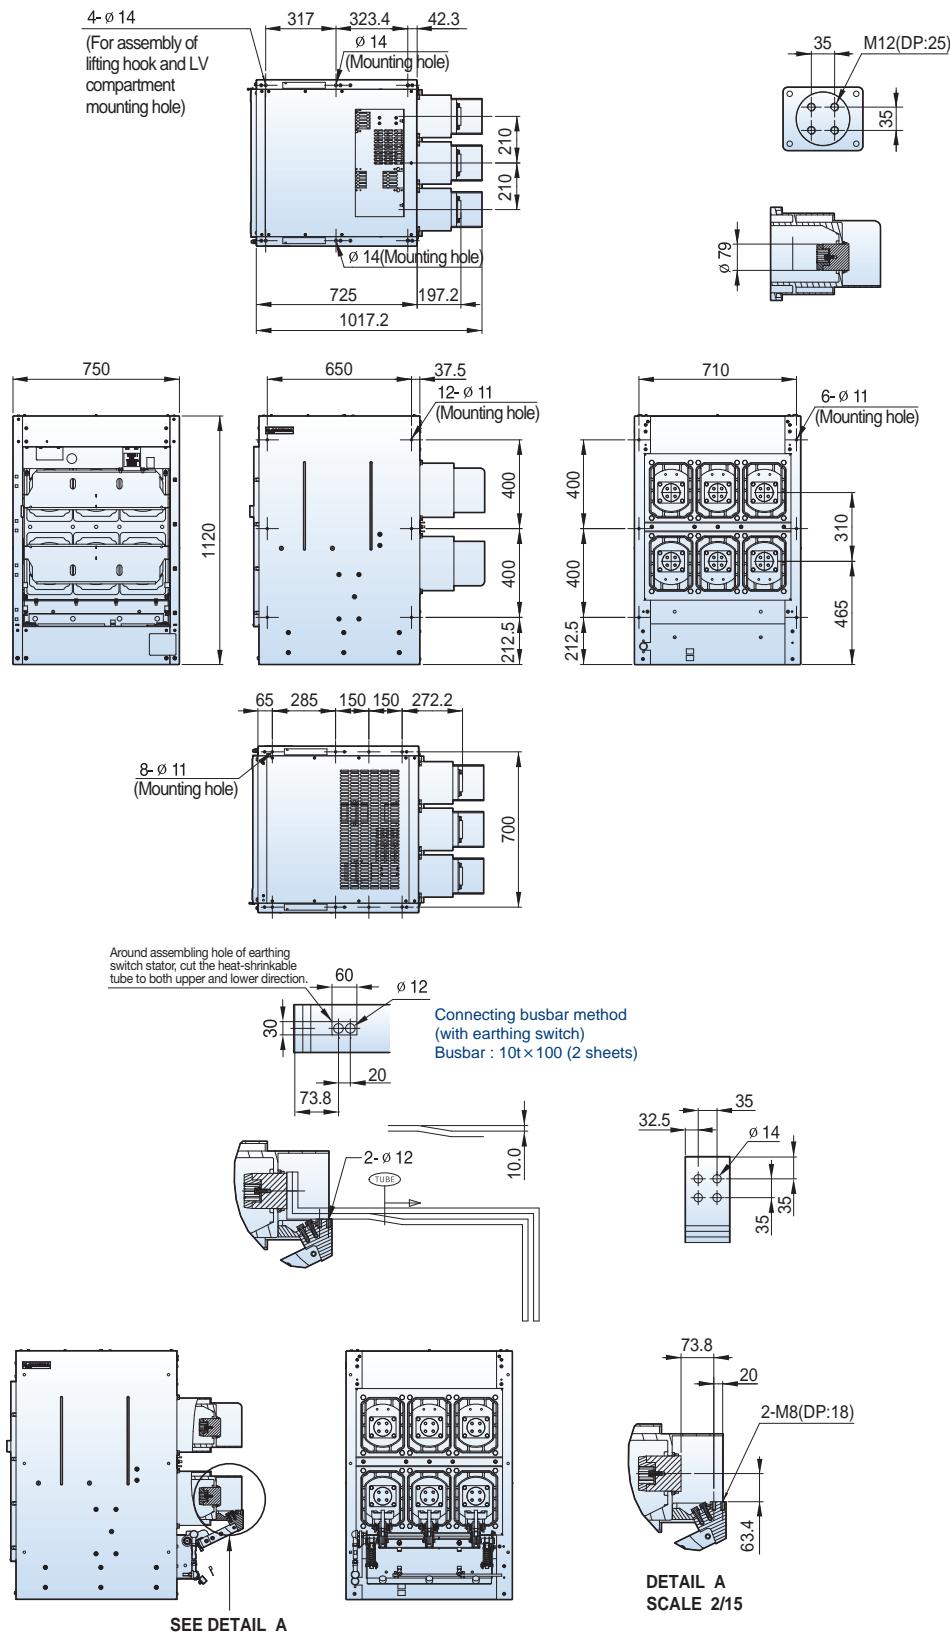

Susol

12/17.5kV, 31.5A, 2500A

Withdrawable (H type cradle, phase distance 275mm)

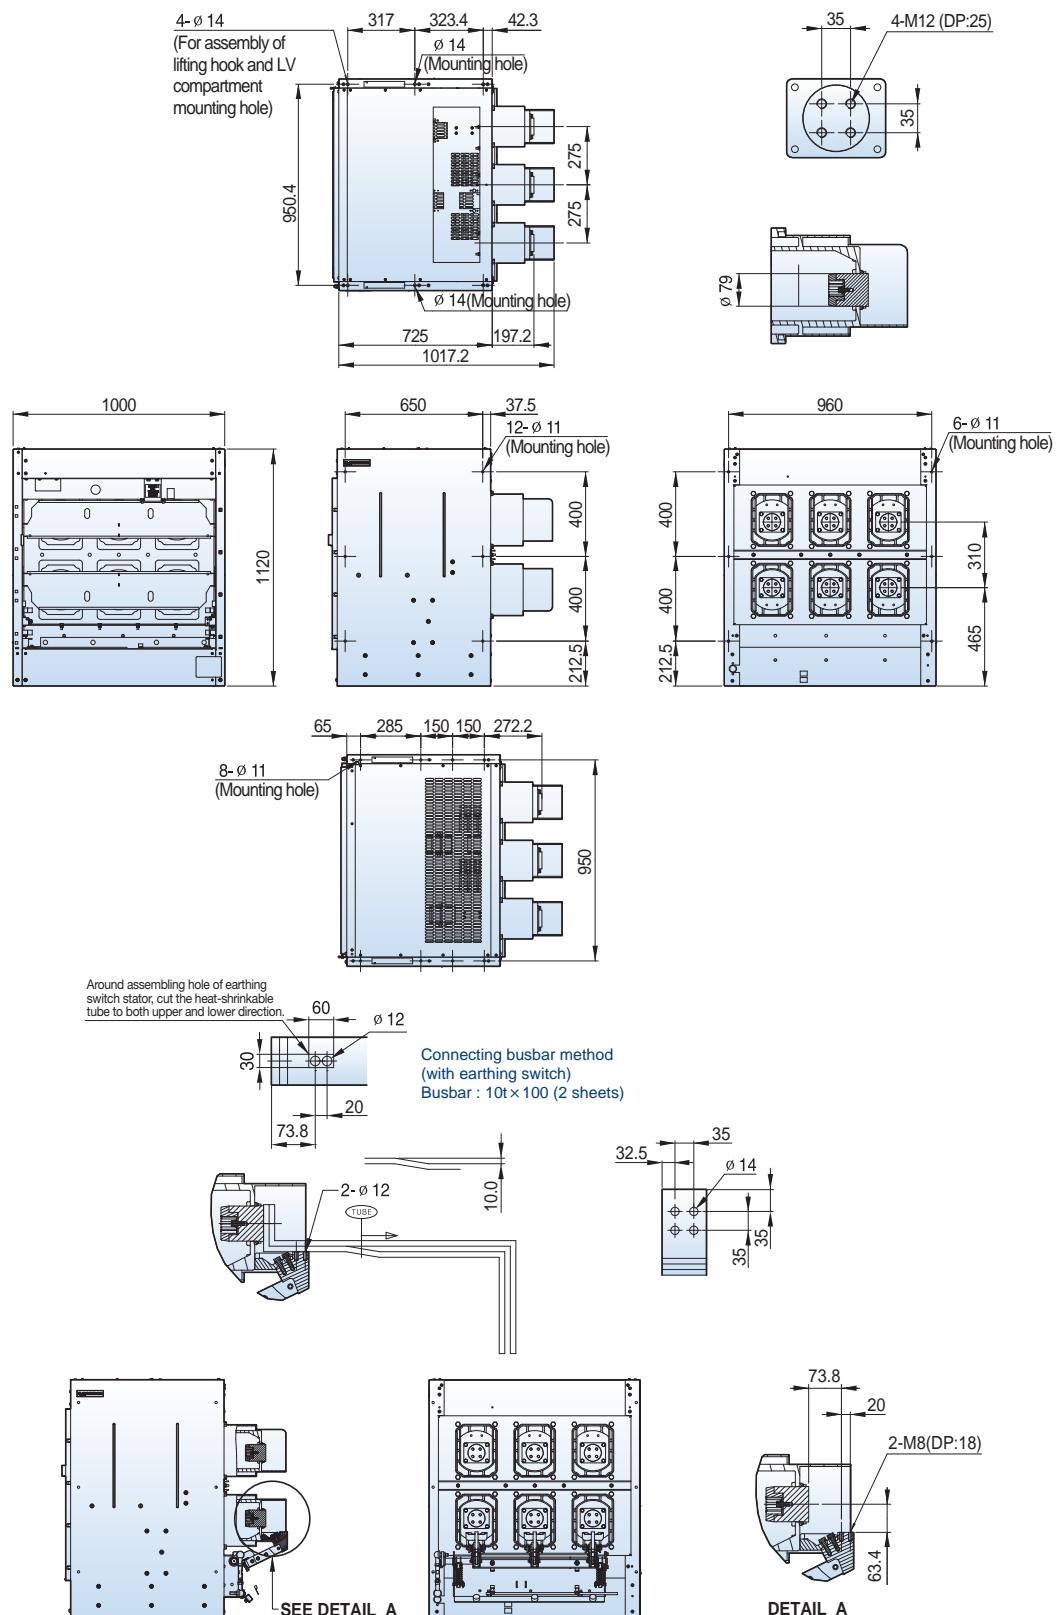


Dimensions - VL type


Susol



24/25.8kV 12.5kA 630A

Fixed (P type, phase distance 265mm)

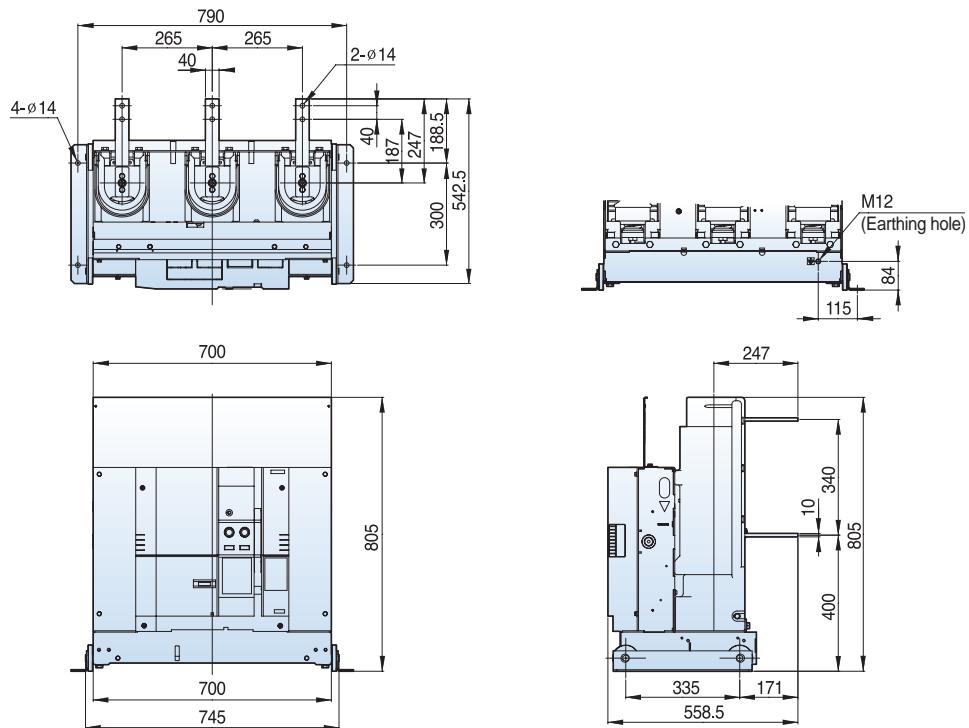

Withdrawable (E type unit Visible, Clip contact, phase distance 265mm)

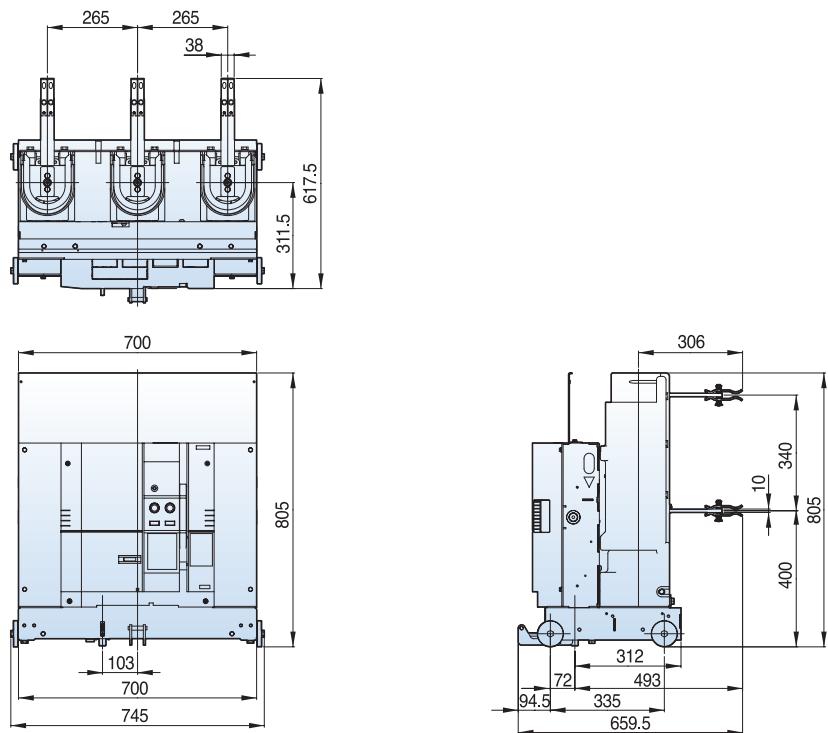


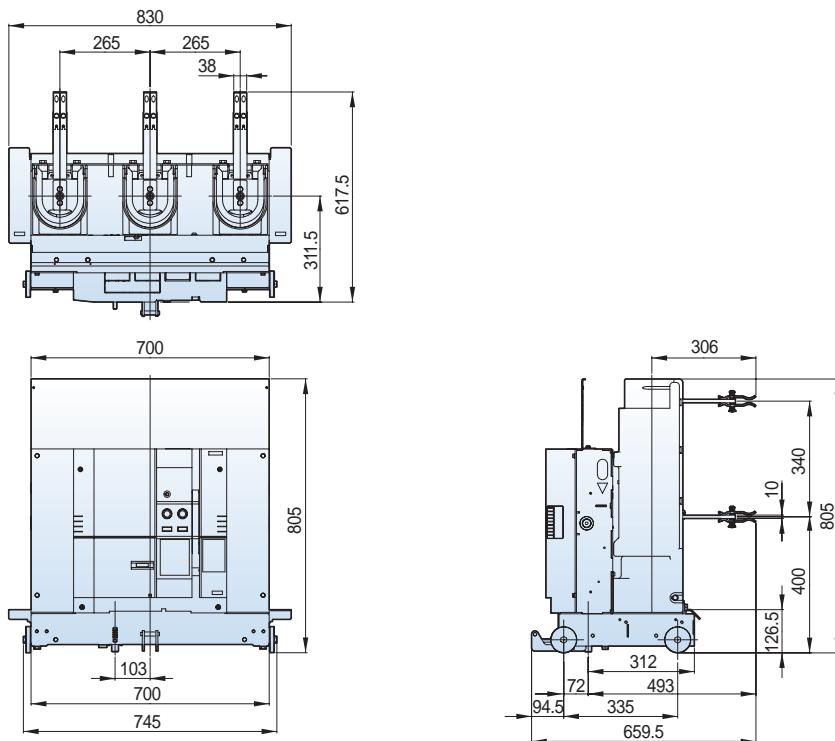
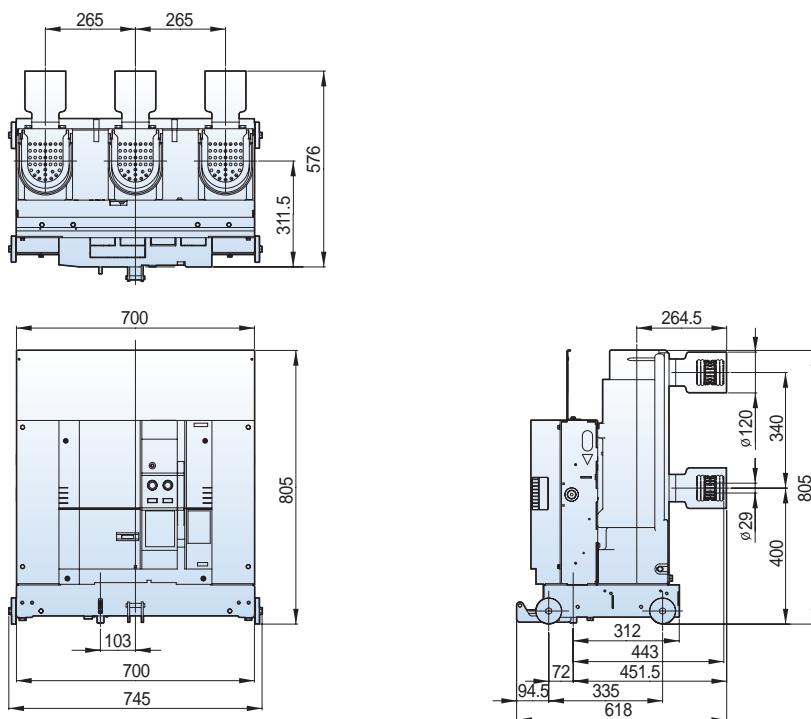
Susol**24/25.8kV 12.5kA 630A****Withdrawable (F type unit Visible, Clip contact, phase distance 265mm)****Withdrawable (E type unit Enclosed, Tulip contact, phase distance 265mm)**

Dimensions - VL type




Susol

24/25.8kV 12.5kA 630A

Withdrawable (F type unit Enclosed, Tulip contact, phase distance 265mm)

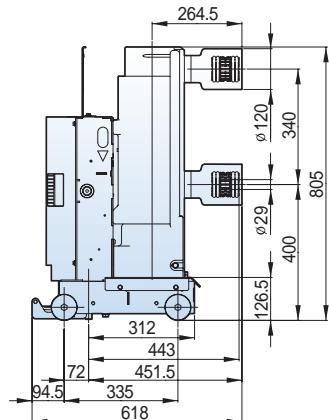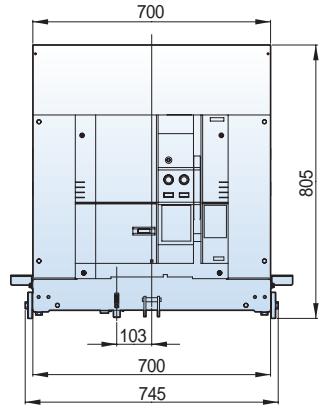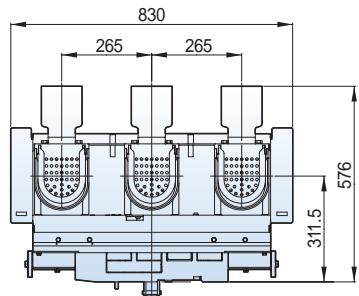


Withdrawable (G type unit Tulip contact, phase distance 265mm)

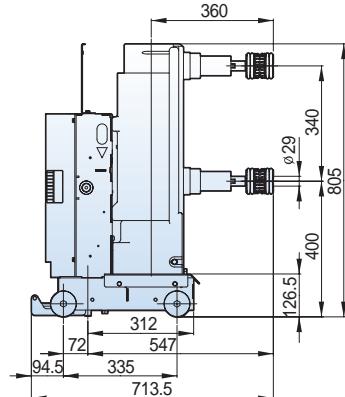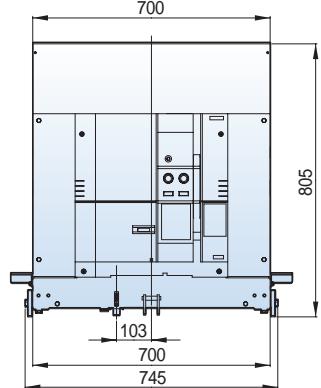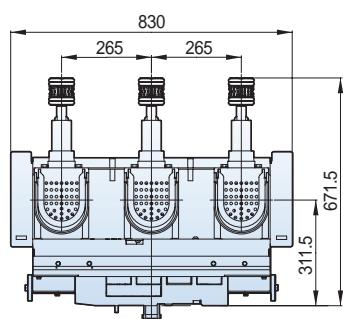


Susol**24/25.8kV 12.5kA 630A**

Withdrawable (G type unit, phase distance 210mm)

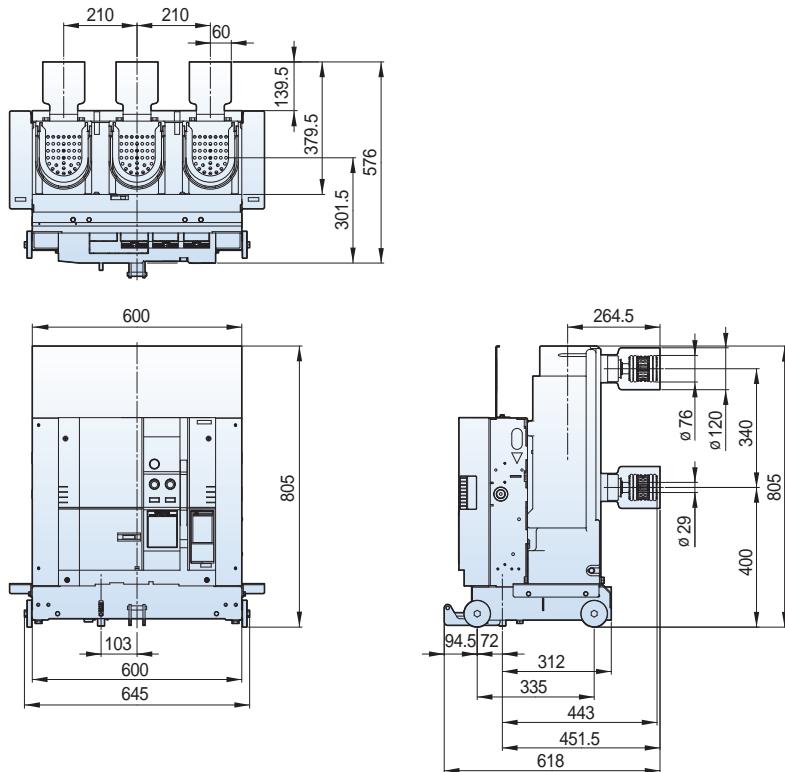

Withdrawable (K type unit, phase distance 210mm)

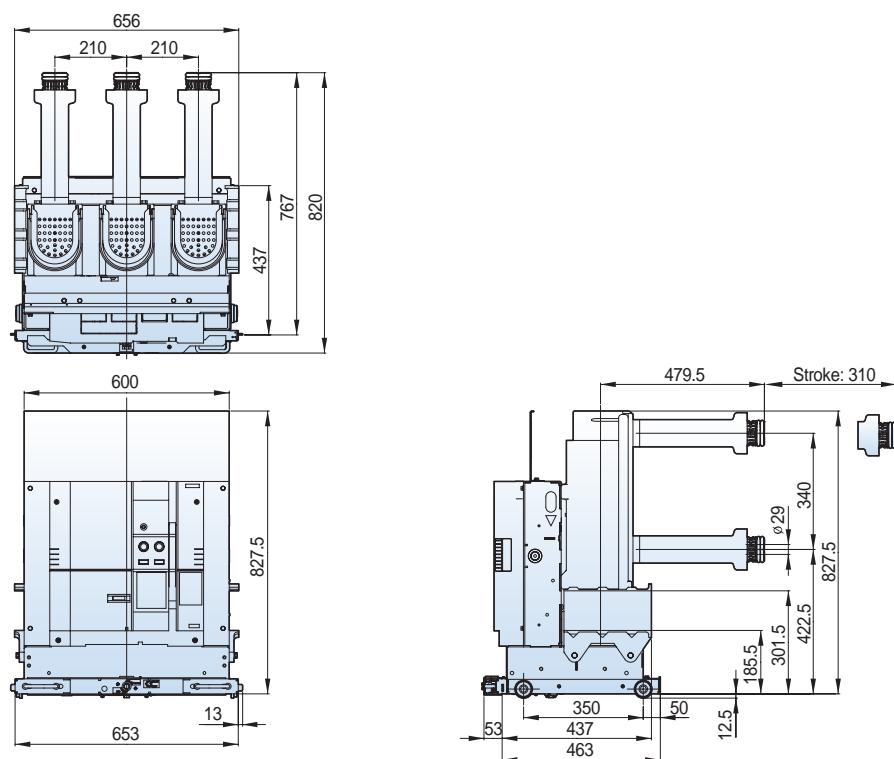


Dimensions - VL type


Susol



24/25.8kV 12.5kA 630A

Withdrawable (K type unit, phase distance 265mm)






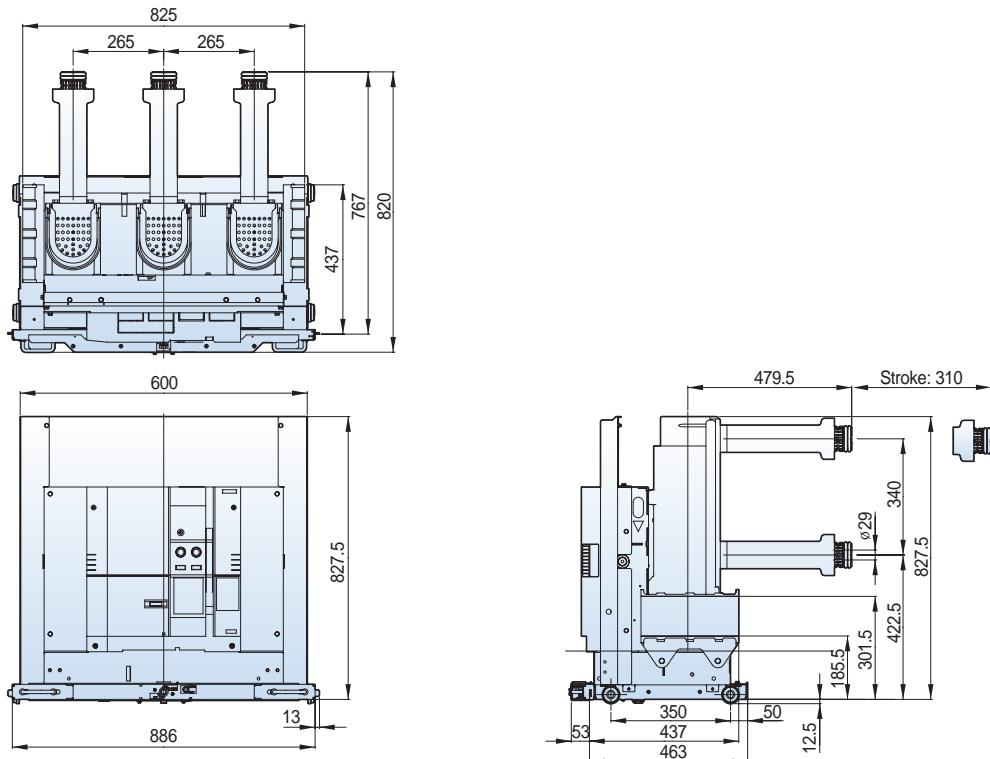


Withdrawable (H type unit, phase distance 210mm)

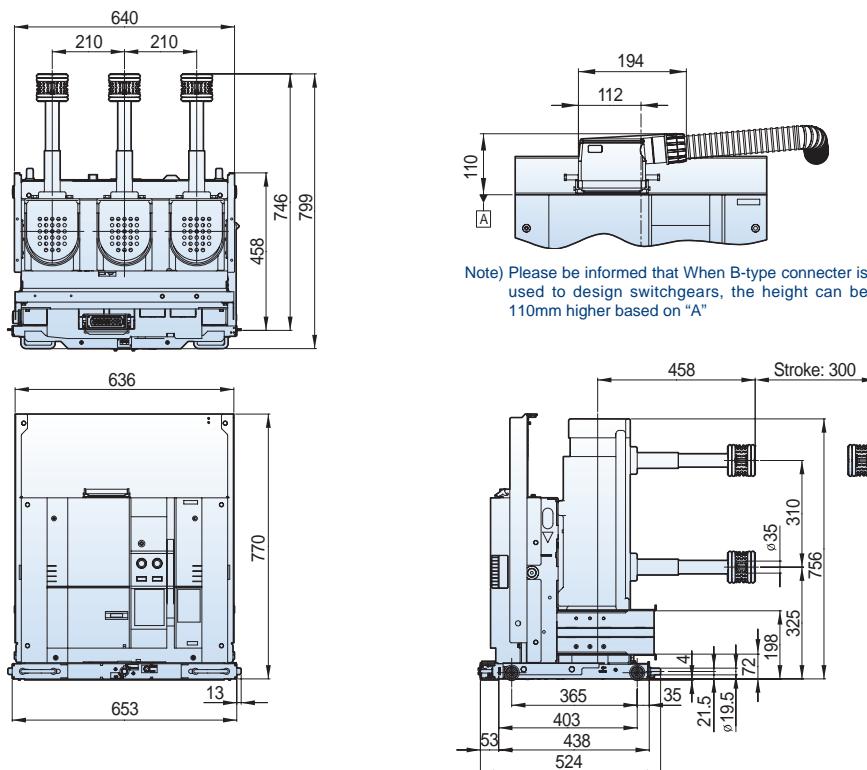

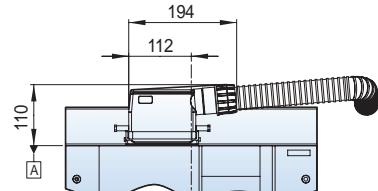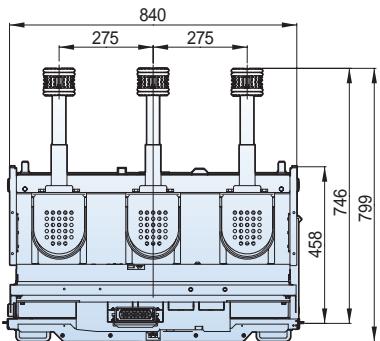Susol**24/25.8kV 12.5kA 630A****Withdrawable (H type unit, phase distance 275mm)**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

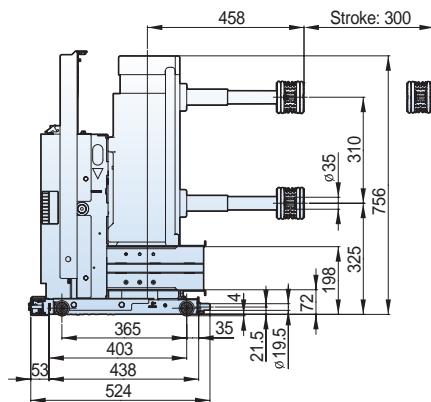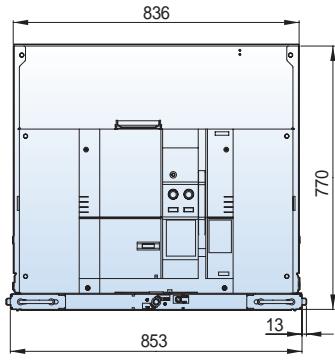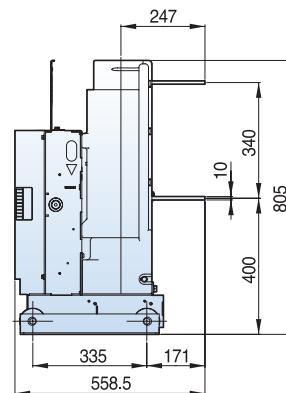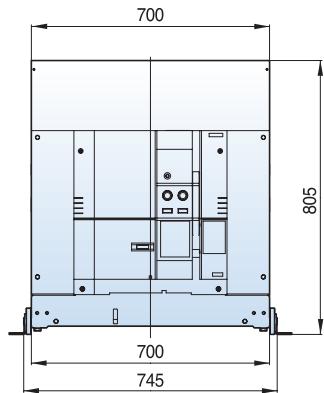
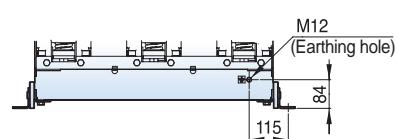
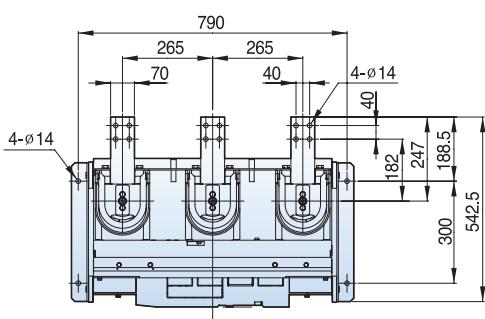
**24/25.8kV 12.5kA 1250A****Fixed (P type, phase distance 265mm)**

Dimensions - VL type




Susol







24/25.8kV 12.5kA 1250A

Withdrawable (E type unit Visible, Clip contact, phase distance 265mm)

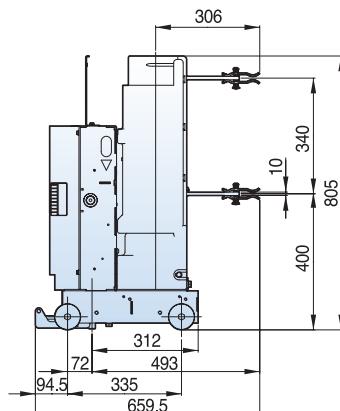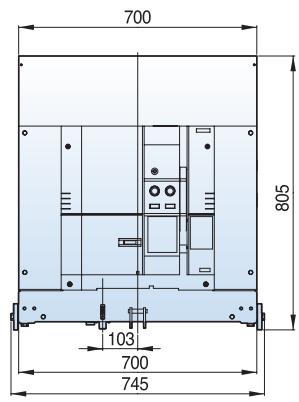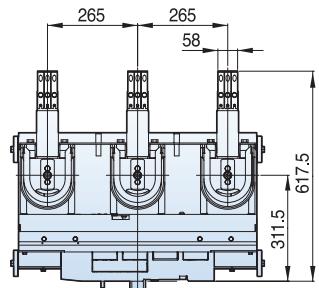

Withdrawable (F type unit Visible, Clip contact, phase distance 265mm)

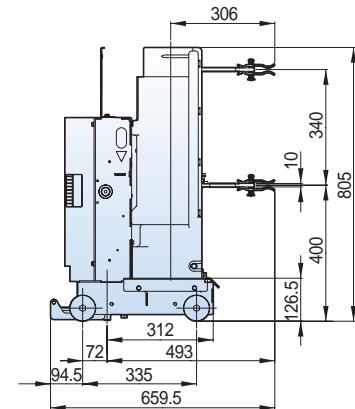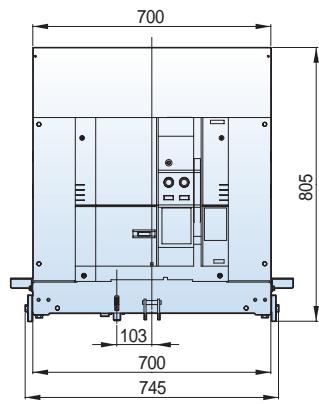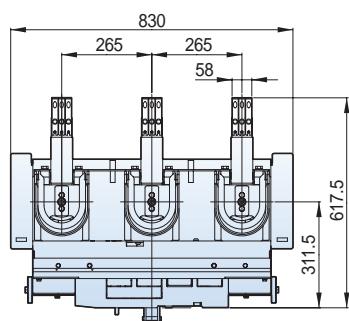

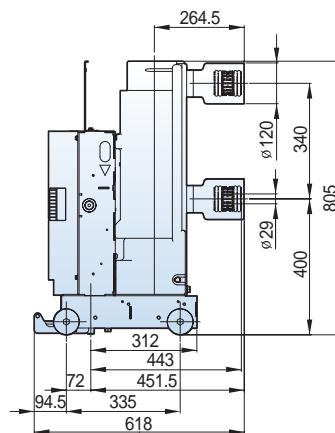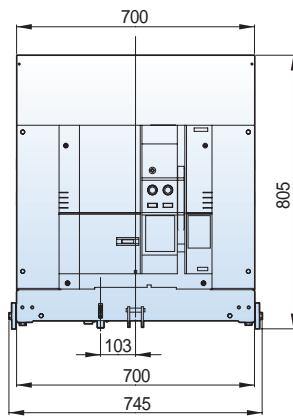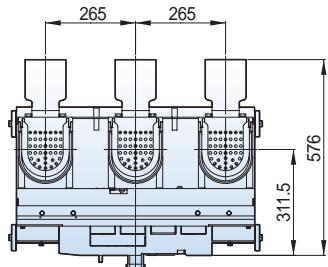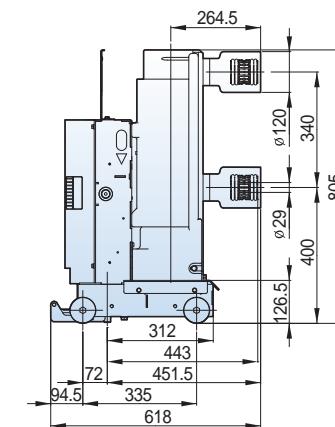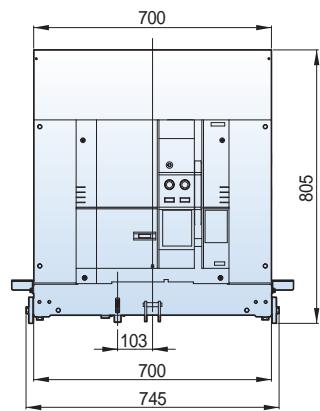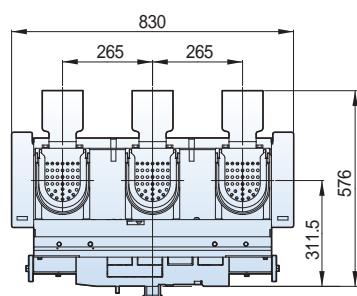
Susol**24/25.8kV 12.5kA 1250A****Withdrawable (E type unit Enclosed, Tulip contact, phase distance 265mm)****Withdrawable (F type unit Enclosed, Tulip contact, phase distance 265mm)**

Dimensions - VL type

Susol


24/25.8kV 12.5kA 1250A

Withdrawable (G type unit Tulip contact, phase distance 265mm)

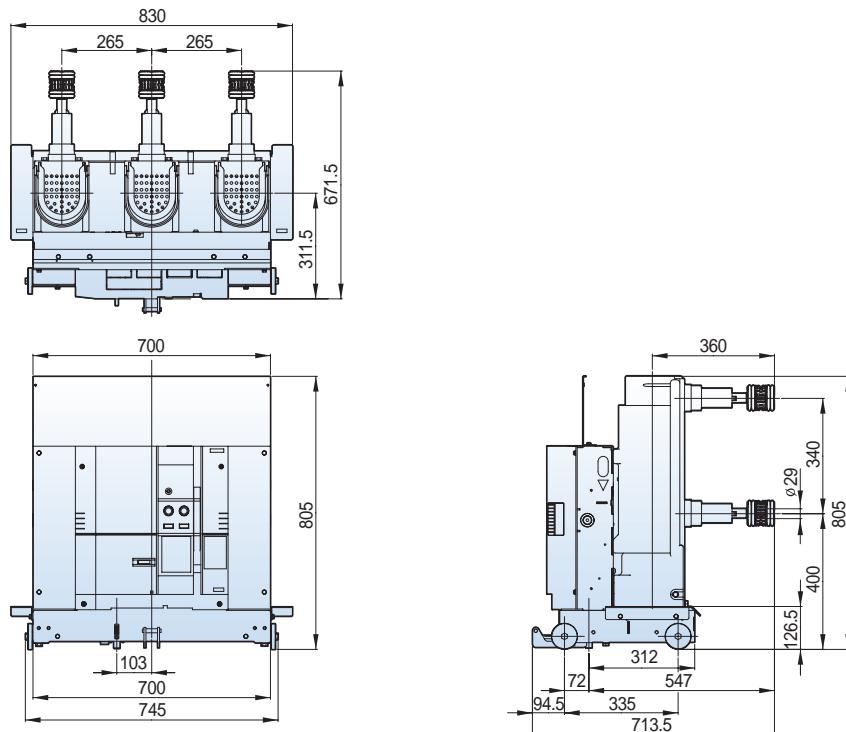

24/25.8kV 12.5kA 1250A & 16/25kA 630/1250A


Withdrawable (G type unit, phase distance 210mm)

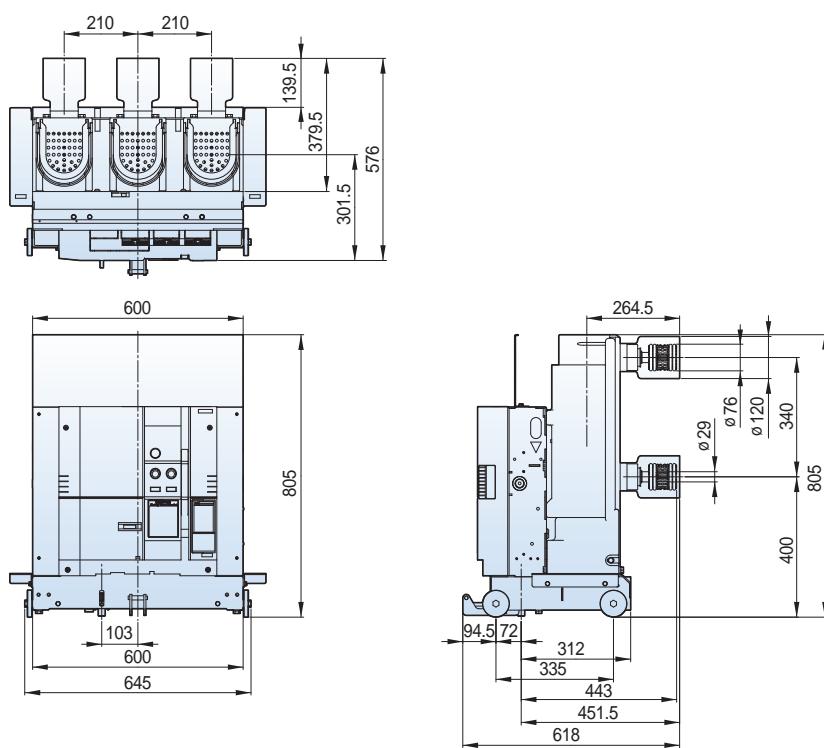


Susol

24/25.8kV 12.5kA 1250A

Withdrawable (K type unit, phase distance 210mm)

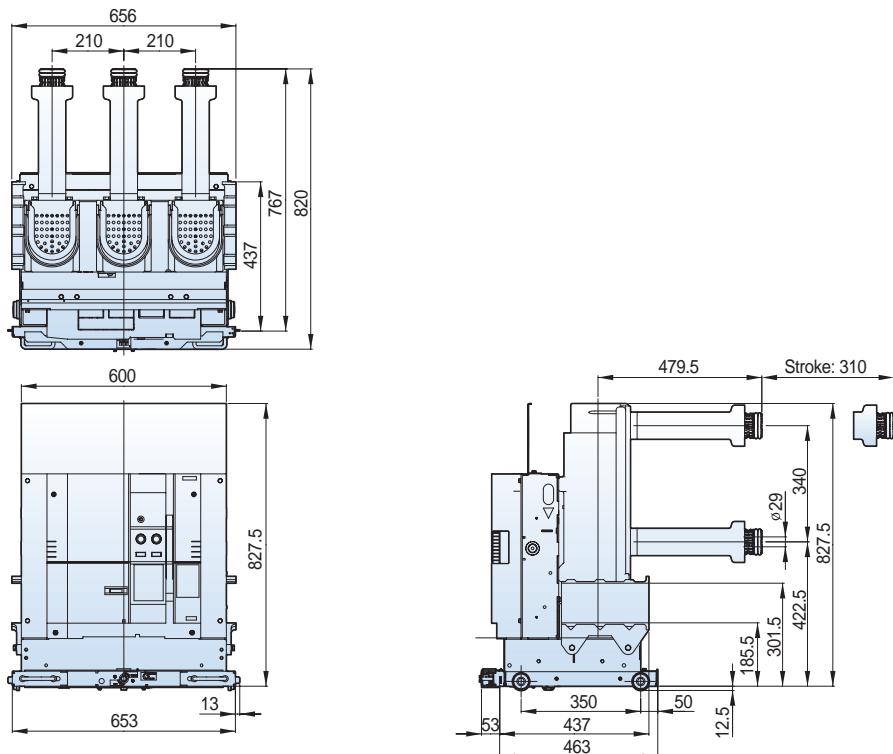

Drawable (K type unit, phase distance 265mm)


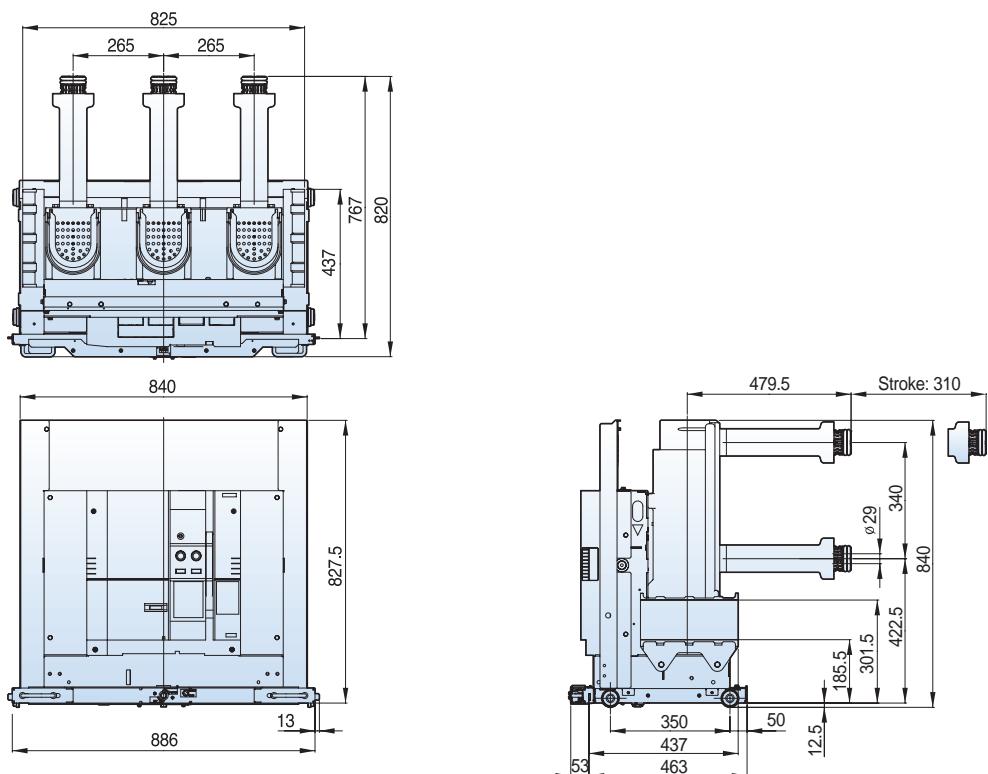


Dimensions - VL type



Susol

24/25.8kV 12.5kA 1250A



Withdrawable (H type unit, phase distance 210mm)

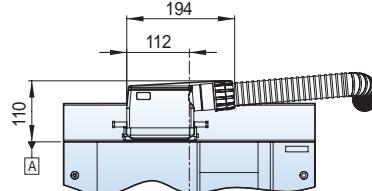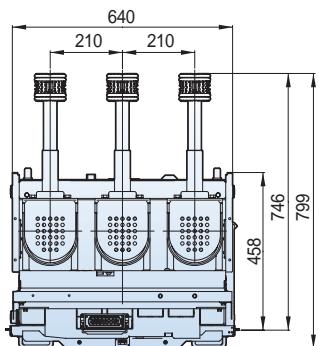



Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

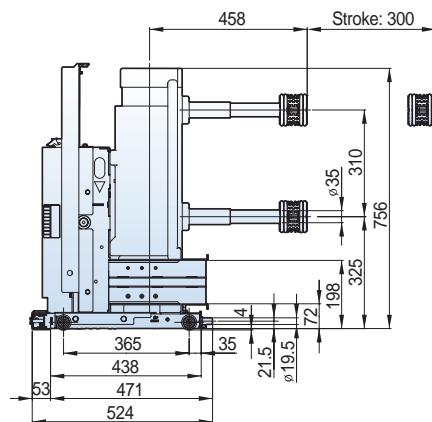
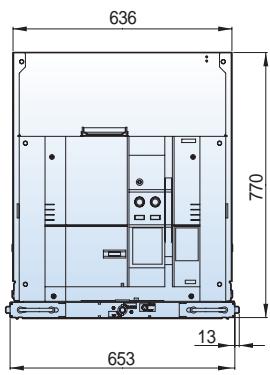


Withdrawable (H type unit, phase distance 275mm)

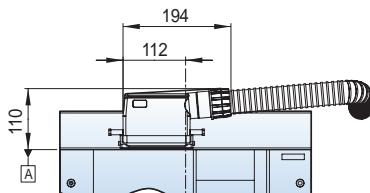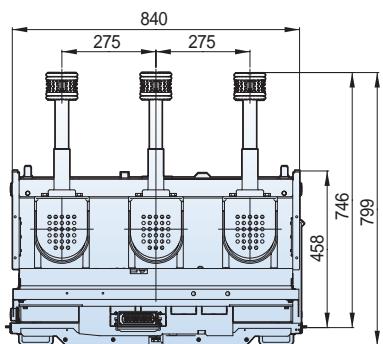

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

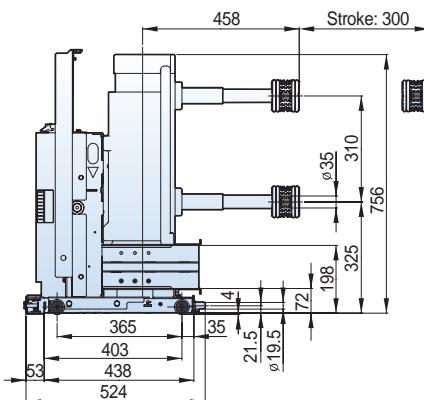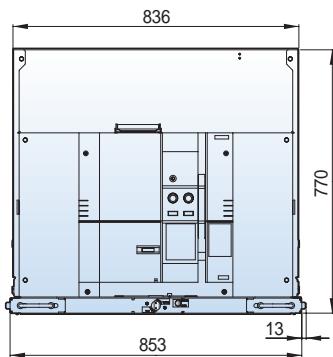

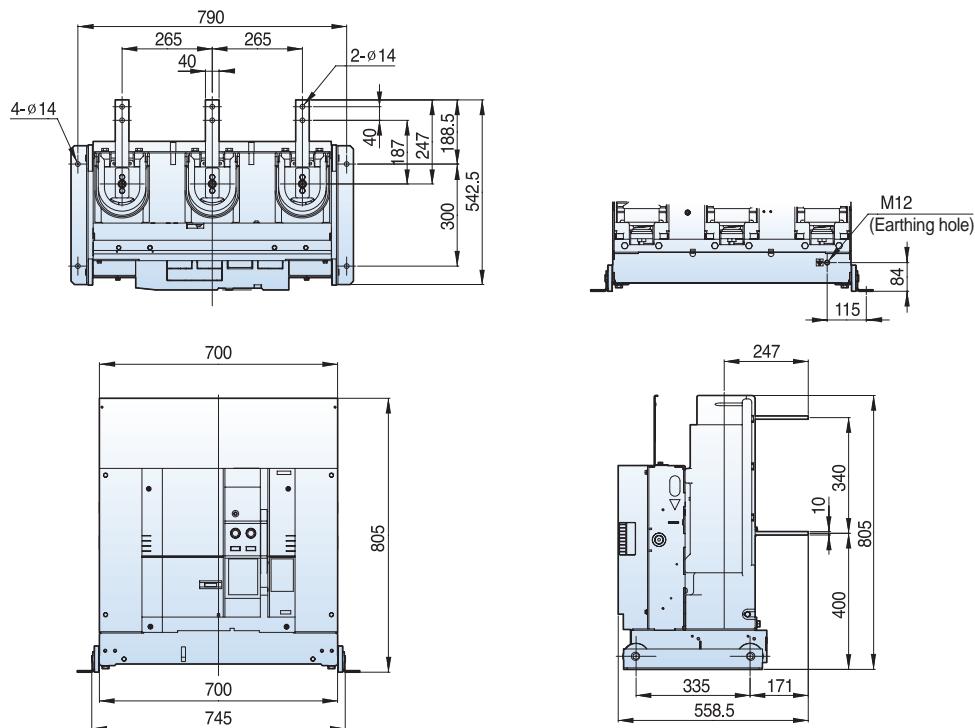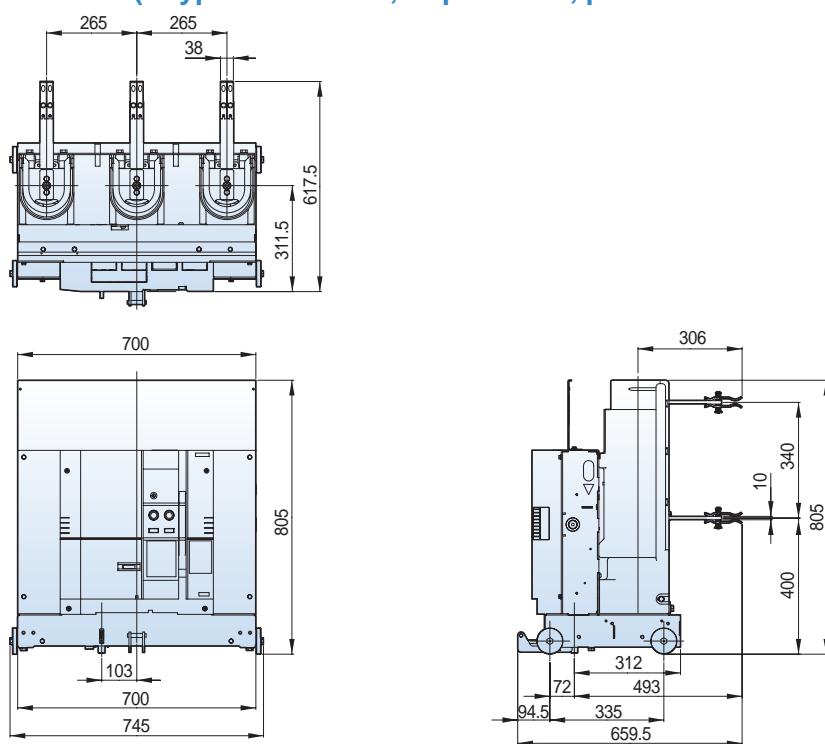
Susol**24/25.8kV 16/25kA 630A****Fixed (P type, phase distance 265mm)****24/25.8kV 16kA 630A****Withdrawable (E type unit Visible, Clip contact, phase distance 265mm)**

Dimensions - VL type

Susol


24/25.8kV 16kA 630A







Withdrawable (F type unit Visible, Clip contact, phase distance 265mm)

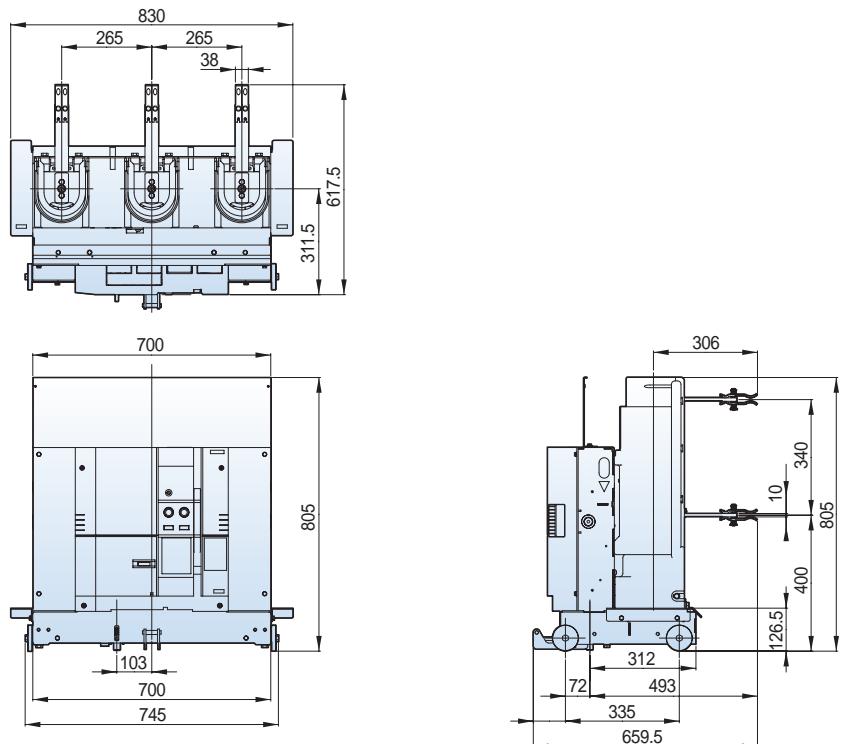

24/25.8kV 16/25kA 1250A

Fixed (P type, phase distance 265mm)

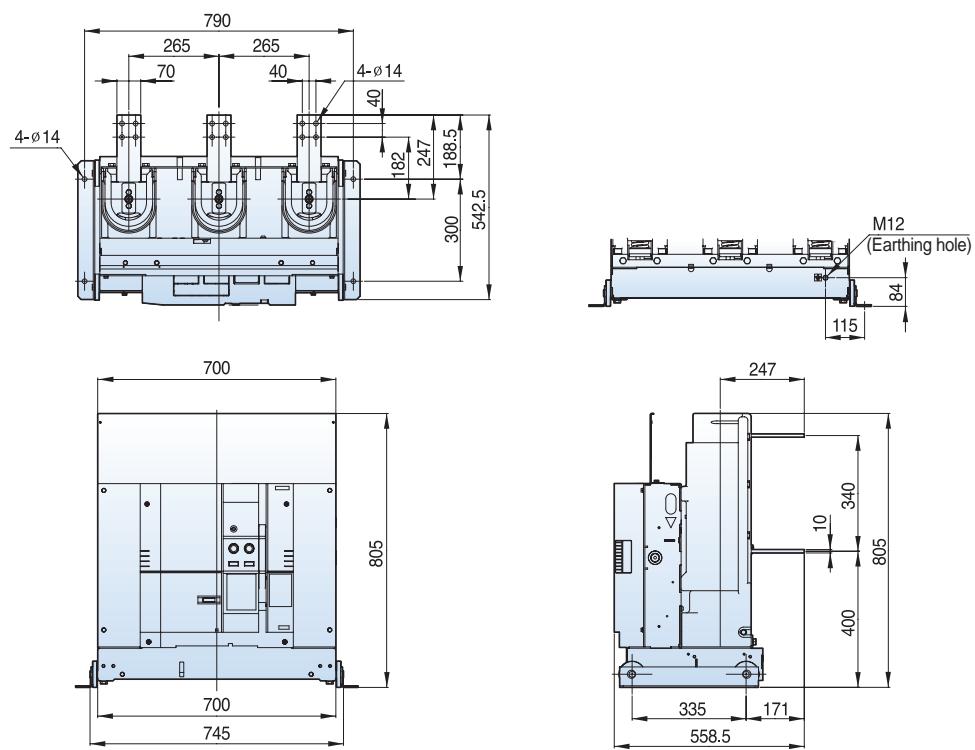

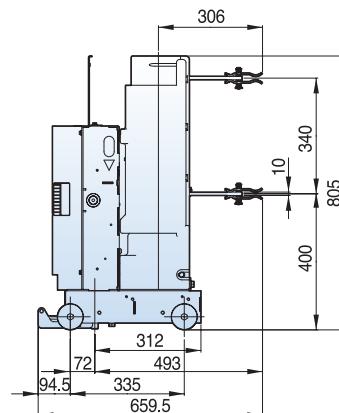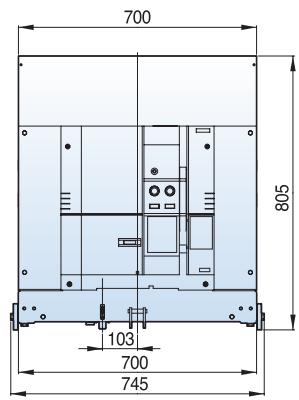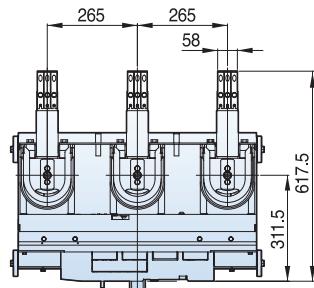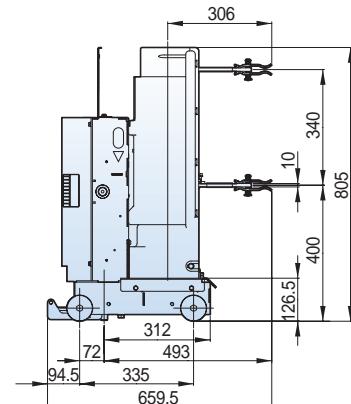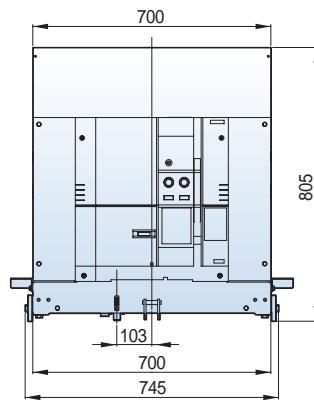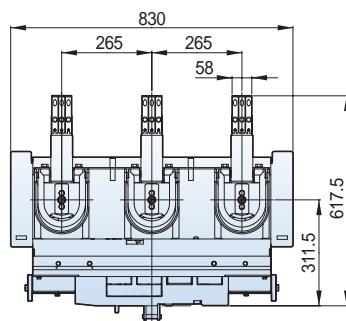
Susol**24/25.8kV 25kA 630A & 24/25.8kV 16/25kA 1250A****Withdrawable (E type unit Visible, Clip contact, phase distance 265mm)****Withdrawable (F type unit Visible, Clip contact, phase distance 265mm)**

Dimensions - VL type


Susol



24/25.8kV 16/25kA 630/1250A

Withdrawable (E type unit Enclosed, Tulip contact, phase distance 265mm)

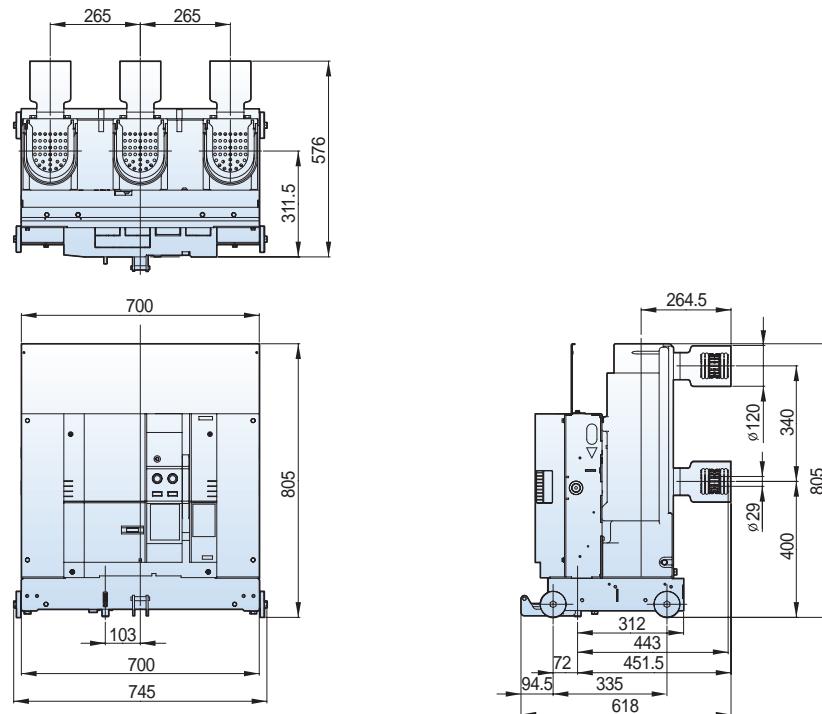

Withdrawable (F type unit Enclosed, Tulip contact, phase distance 265mm)

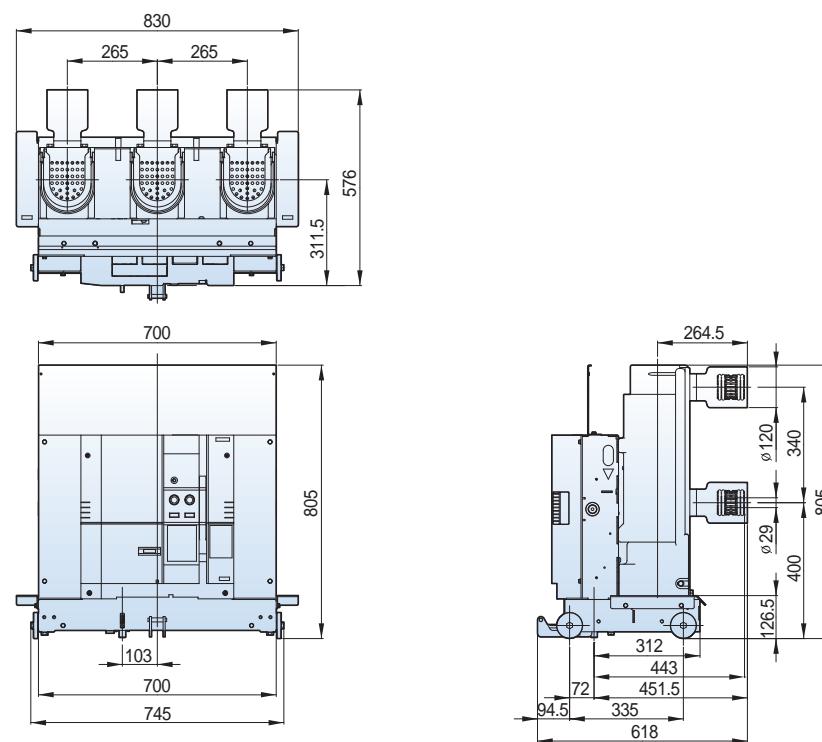

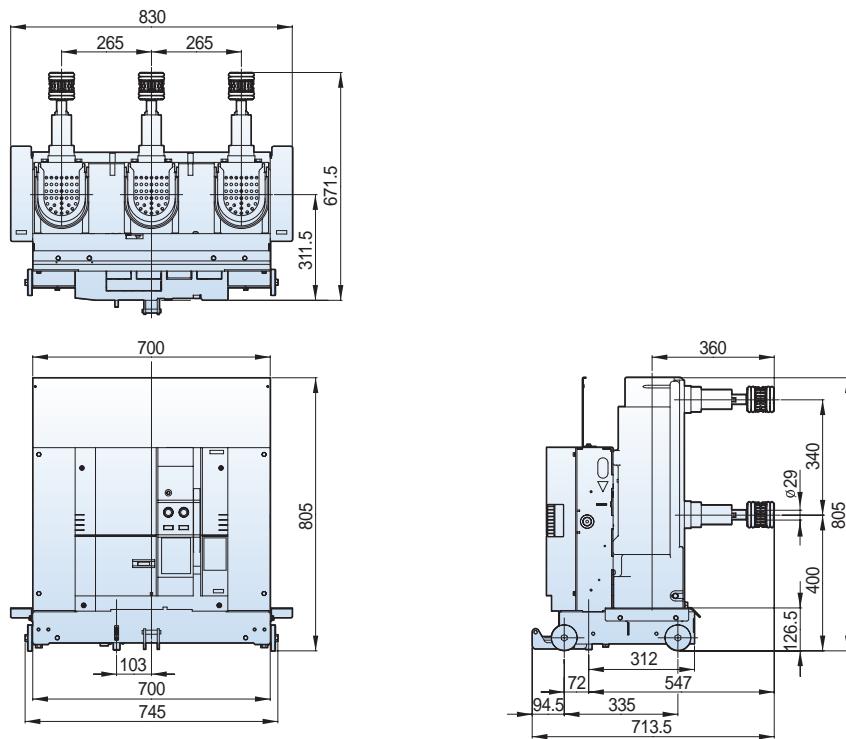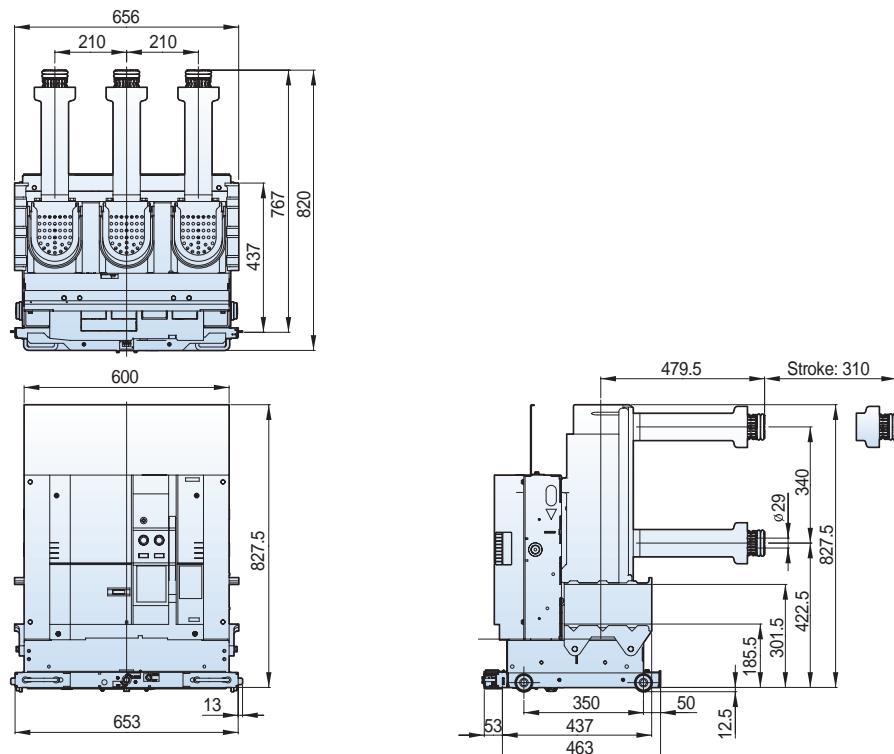
Susol**24/25.8kV 16/25kA 630/1250A****Withdrawable (G type unit Tulip contact, phase distance 265mm)****Withdrawable (K type unit, phase distance 210mm)**

Dimensions - VL type


Susol



24/25.8kV 16/25kA 630/1250A

Withdrawable (K type unit, phase distance 265mm)






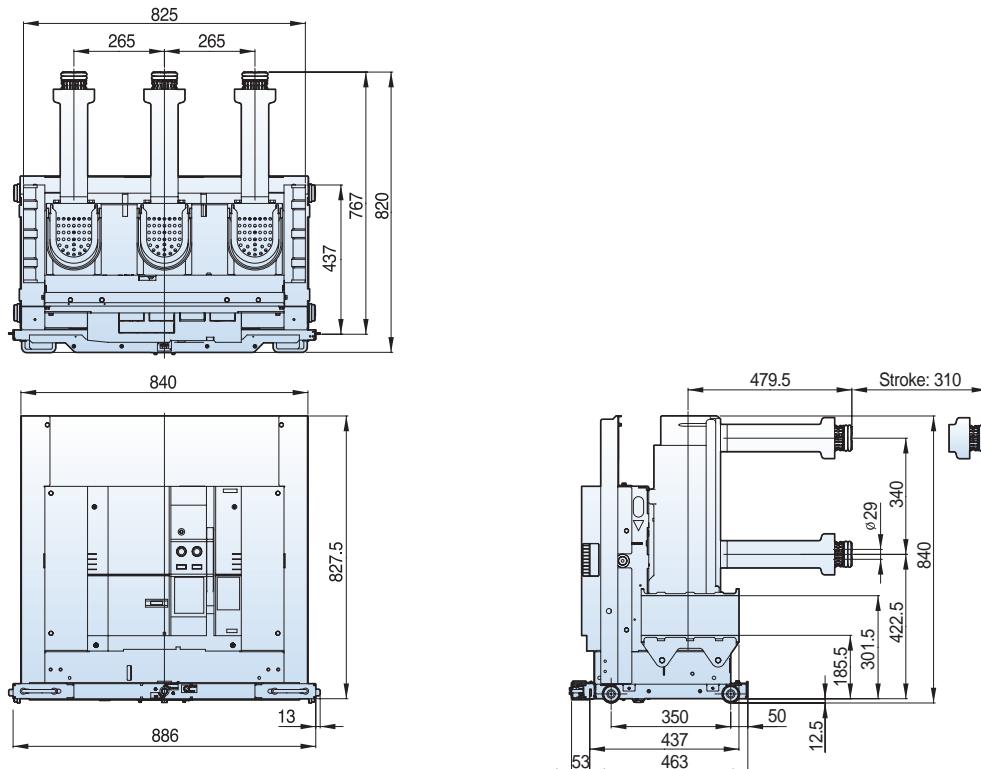


Withdrawable (H type unit, phase distance 210mm)

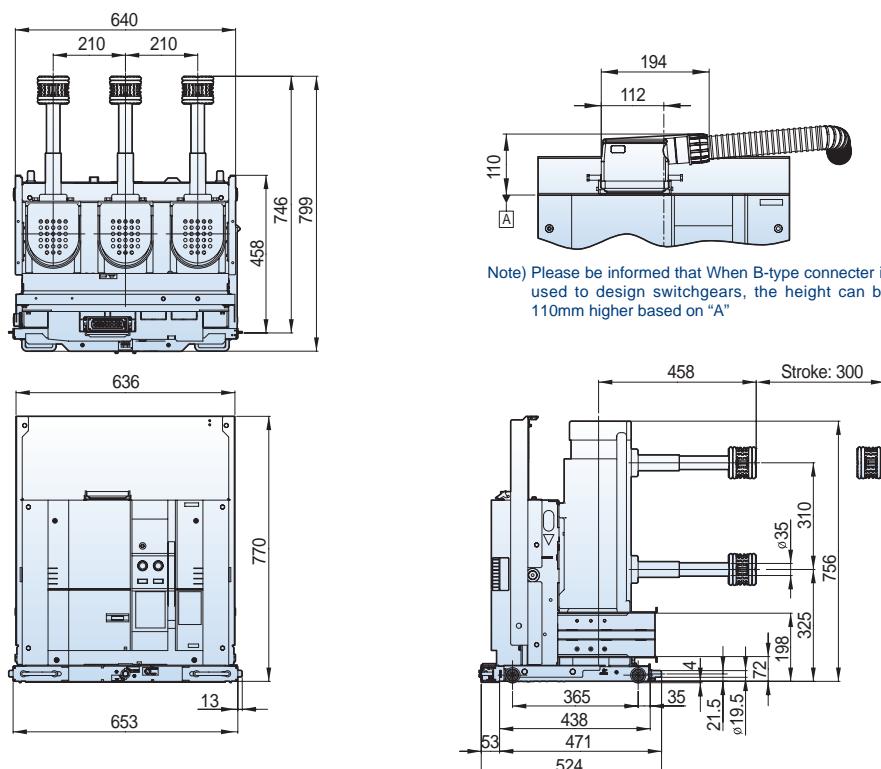

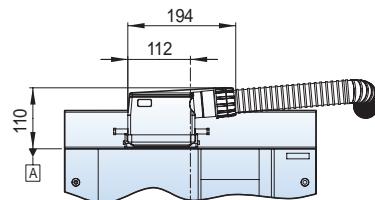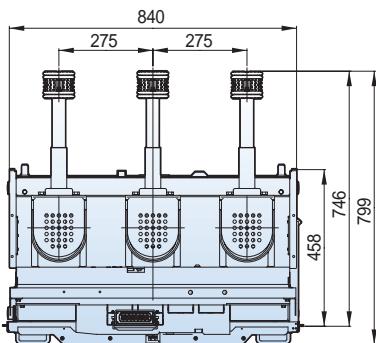Susol**24/25.8kV 16/25kA 630/1250A****Withdrawable (H type unit, phase distance 275mm)**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

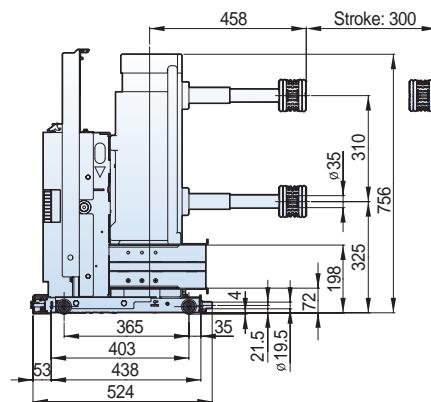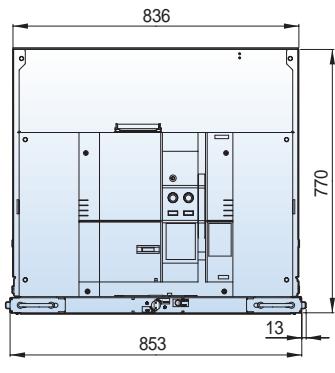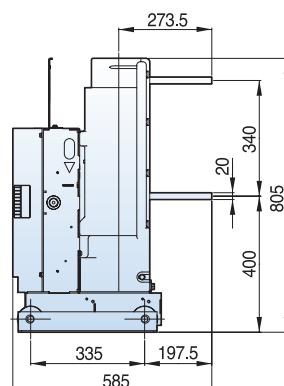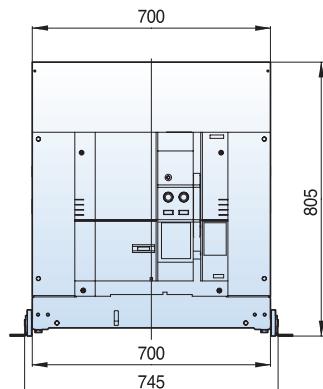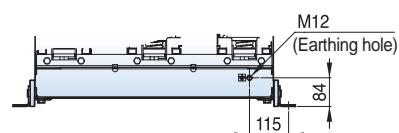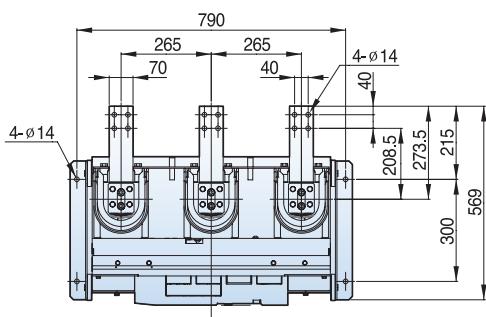
**24/25.8kV 25kA 2000A****Fixed (P type, phase distance 265mm)**

Dimensions - VL type


Susol







24/25.8kV 25kA 2000A

Withdrawable (E type unit Visible, Clip contact, phase distance 265mm)

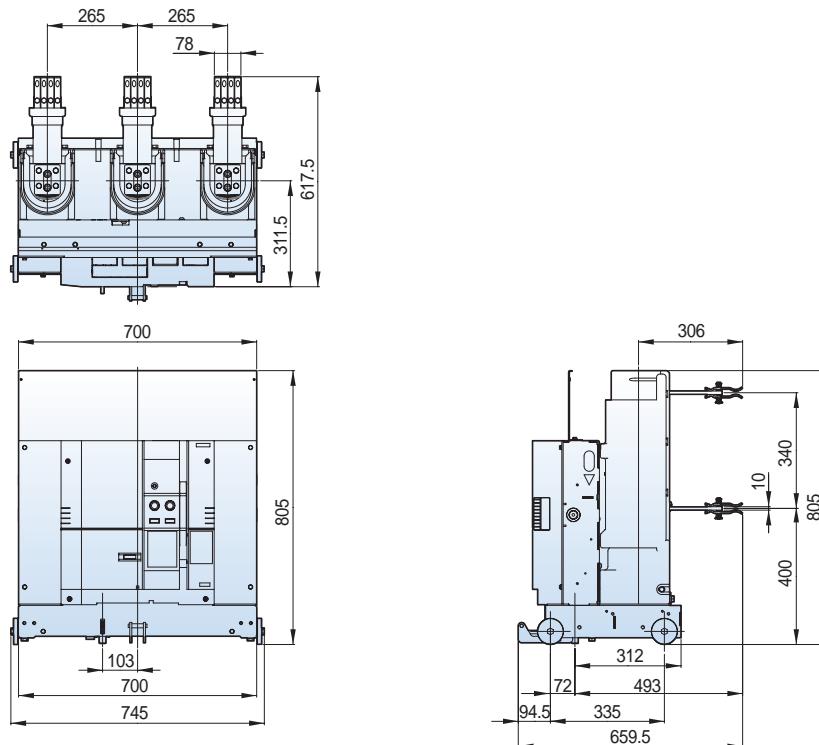

Withdrawable (F type unit Visible, Clip contact, phase distance 265mm)

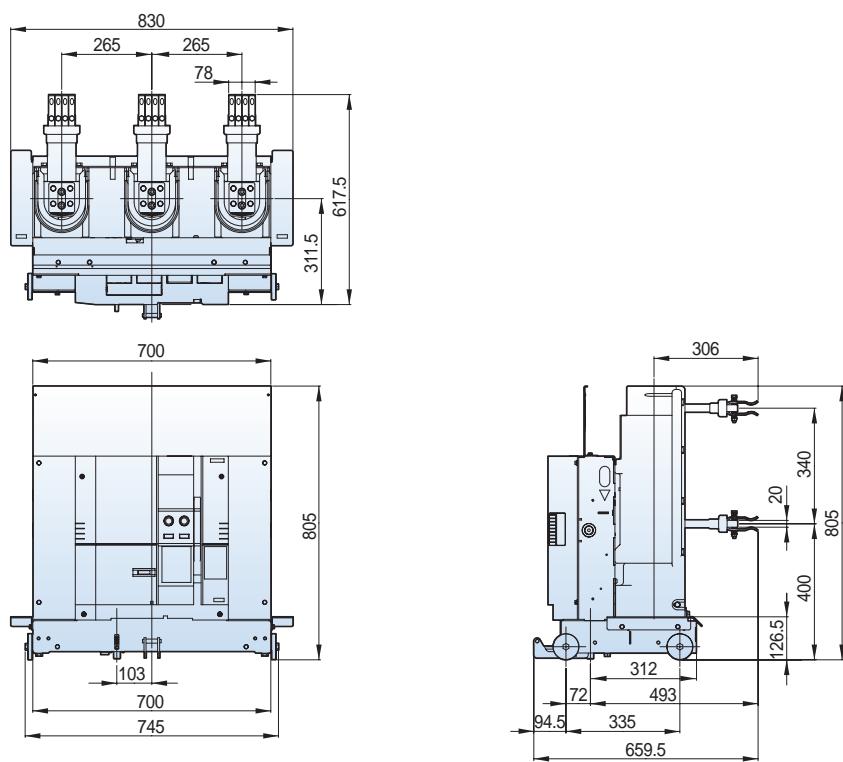

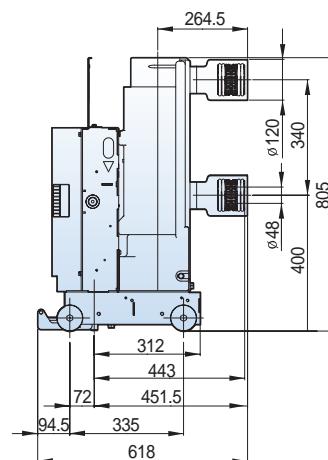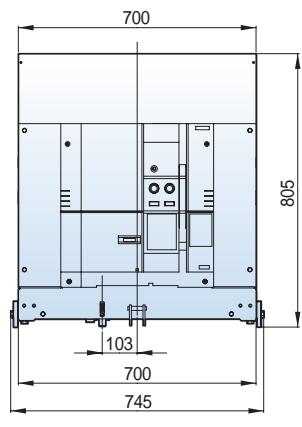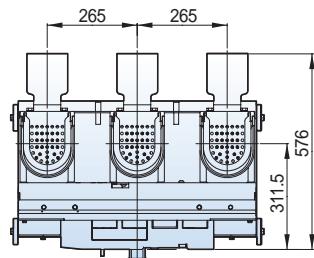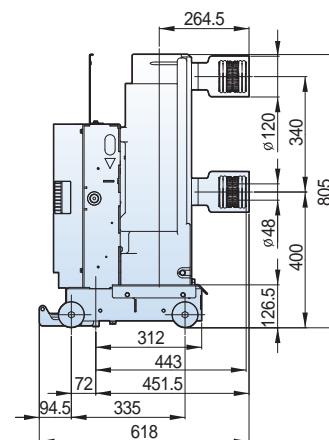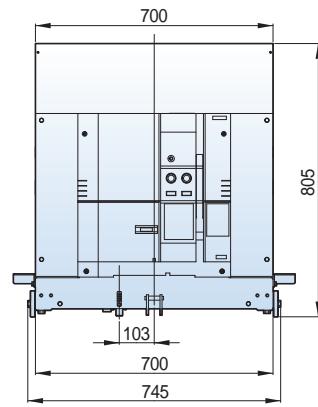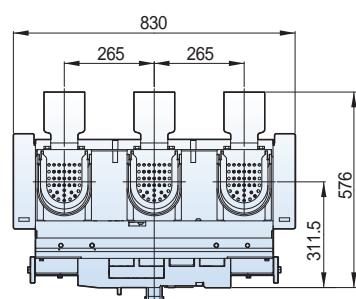
Susol**24/25.8kV 25kA 2000A****Withdrawable (E type unit Enclosed, Tulip contact, phase distance 265mm)****Withdrawable (F type unit Enclosed, Tulip contact, phase distance 265mm)**

Dimensions - VL type


Susol




24/25.8kV 25kA 2000A

Withdrawable (G type unit, phase distance 210mm)




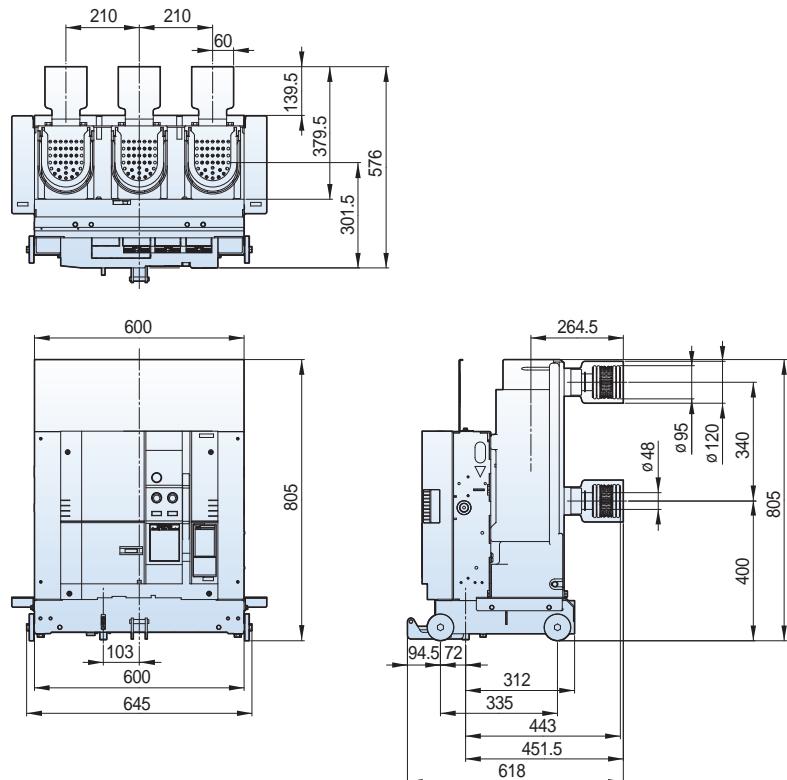


Withdrawable (K type unit, phase distance 265mm)

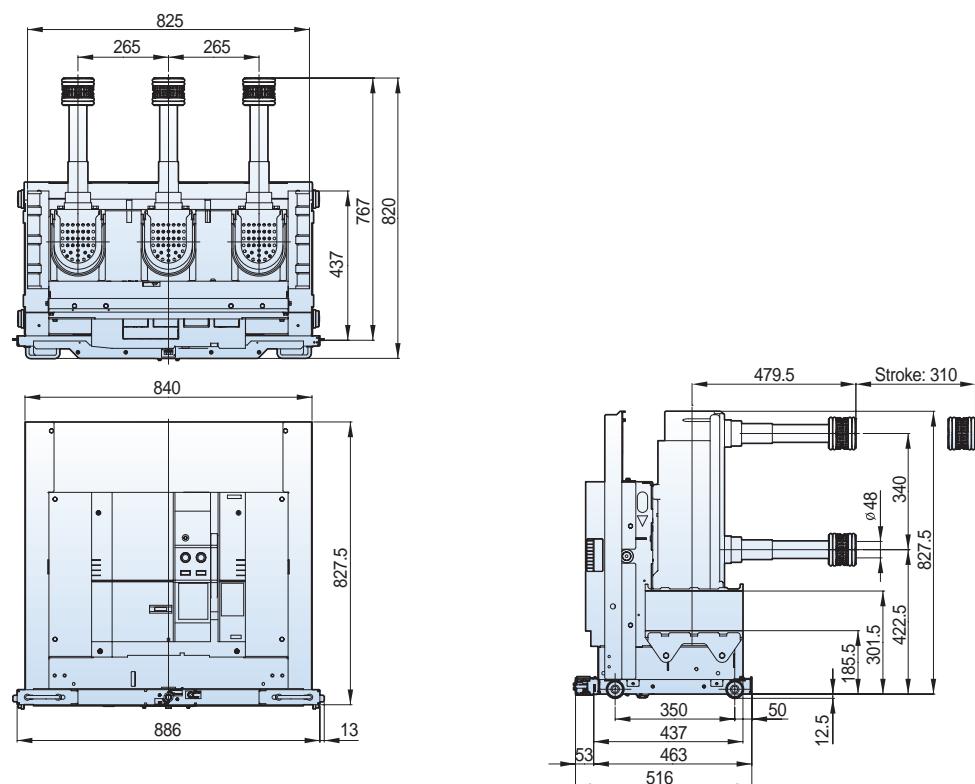


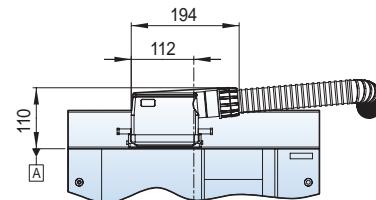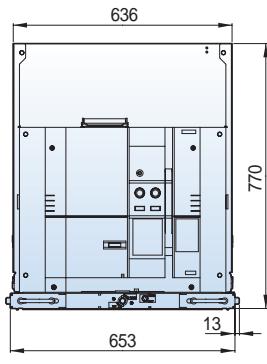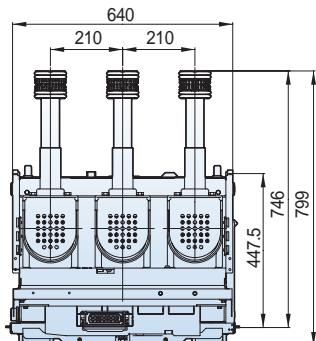Susol**24/25.8kV 25kA 2000A****Withdrawable (H type unit, phase distance 210mm)**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

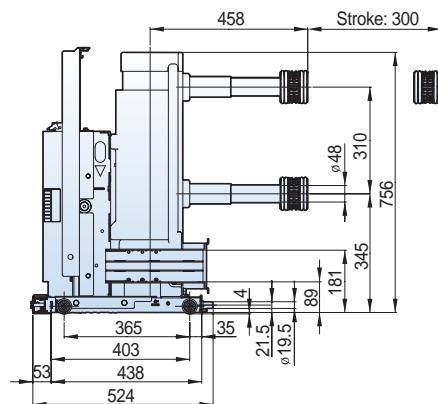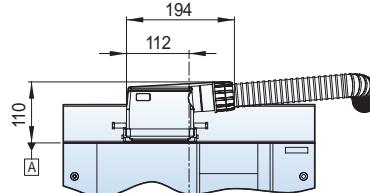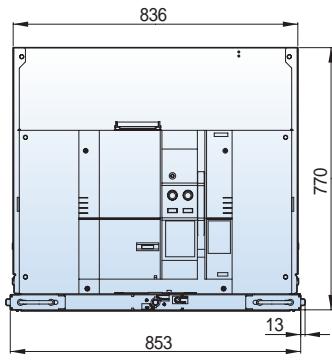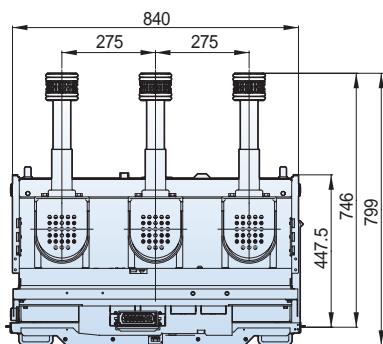**Withdrawable (H type unit, phase distance 275mm)**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

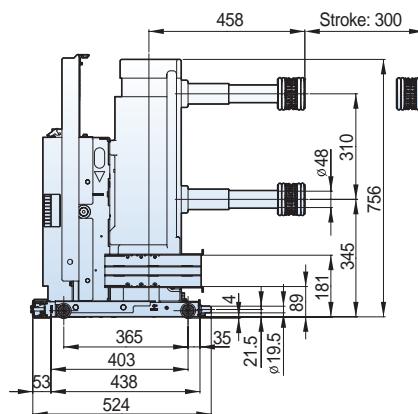


Dimensions - VL type

Susol


24/25.8kV 25kA 2500A

Drawable (H type unit, phase distance 275mm)



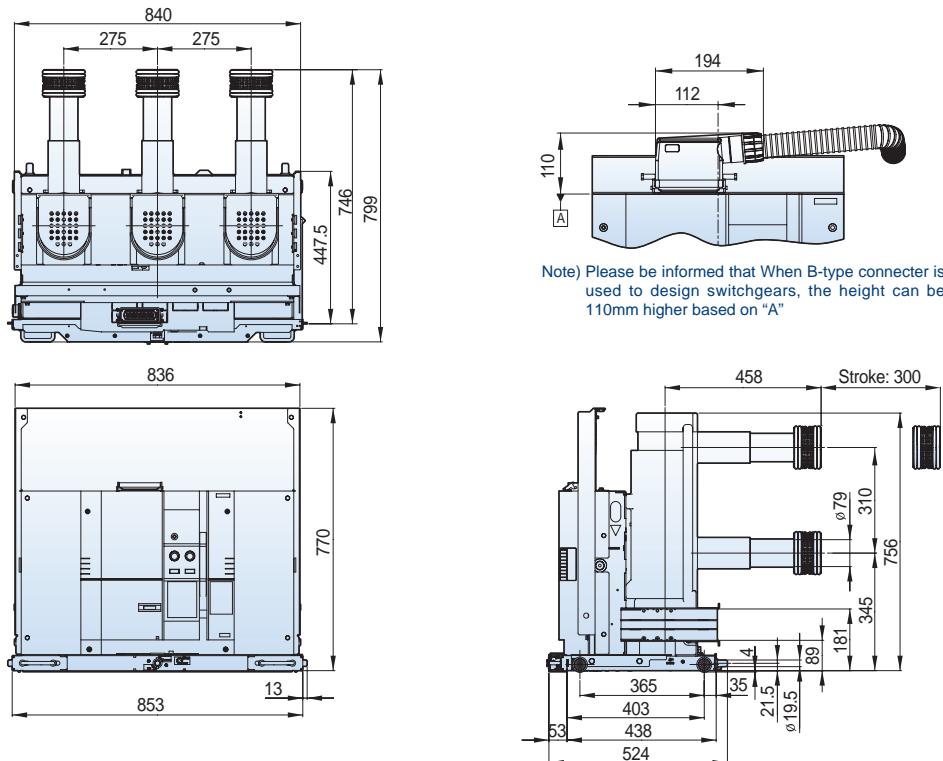


24/25.8kV 12.5/16/25kA 630/1250/2000A

Withdrawable (E type cradle Visible, Clip contact, phase distance 265mm)

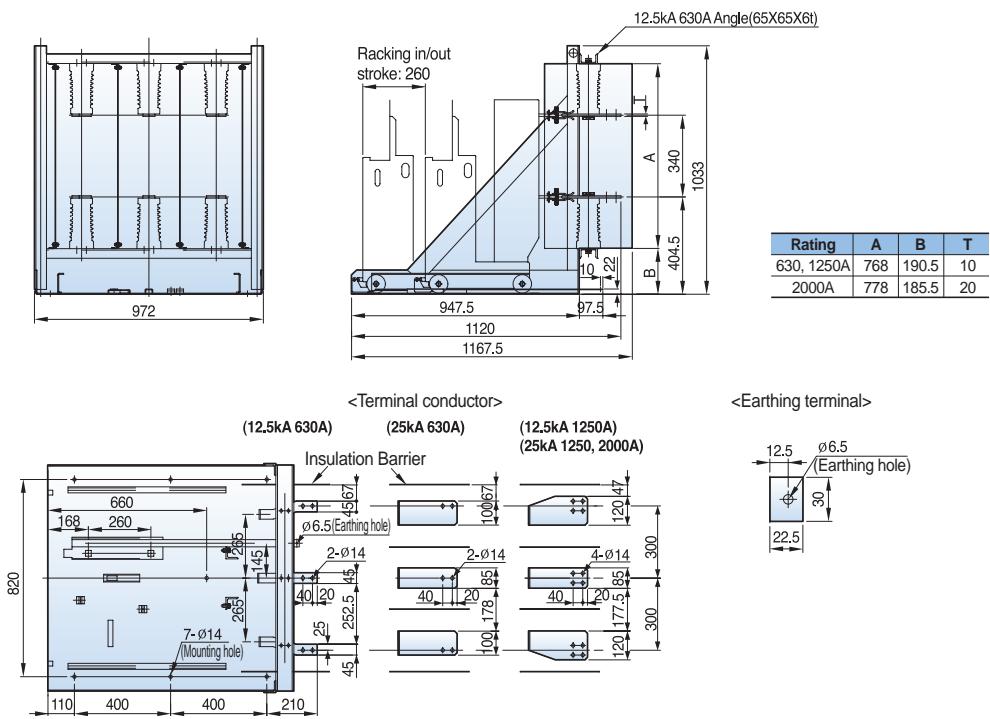

Susol

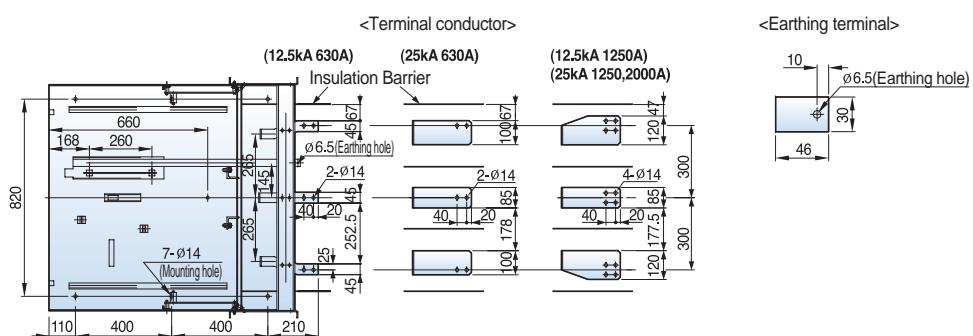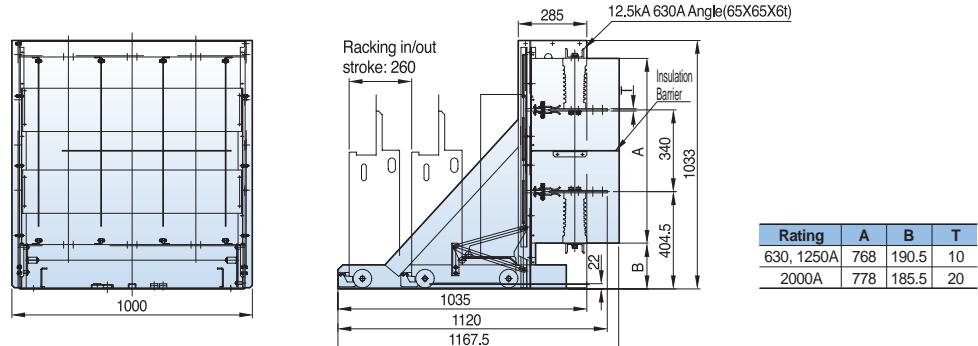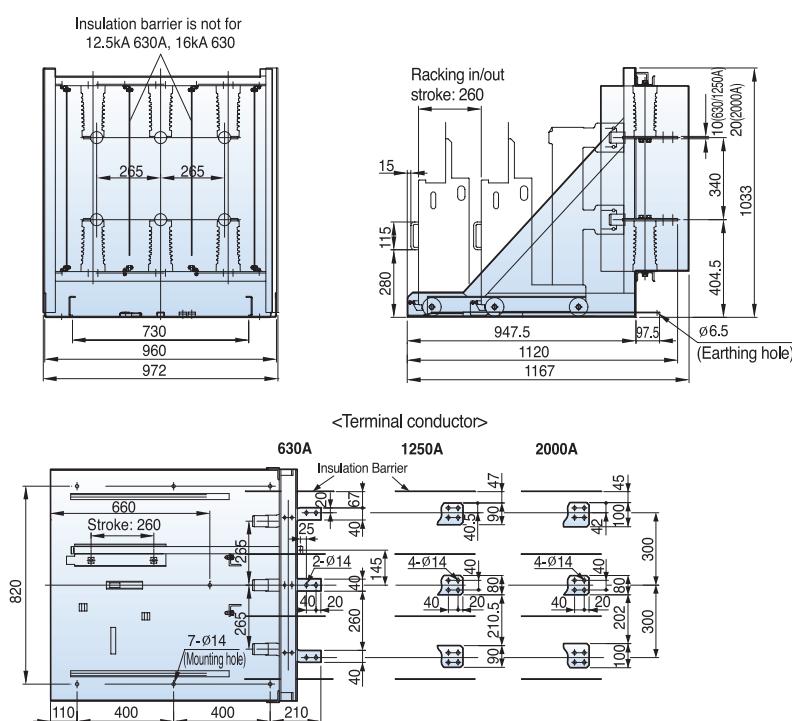
24/25.8kV 12.5/16/25kA 630/1250/2000A**Withdrawable (F type cradle Visible, Clip contact, phase distance 265mm)****24/25.8kV 12.5/16/25kA 630/1250/2000A****Withdrawable (E type cradle Enclosed, Tulip contact, phase distance 265mm)**

Dimensions - VL type

Susol


24/25.8kV 12.5/16/25kA 630/1250/2000A



Withdrawable (F type cradle Enclosed, Tulip contact, phase distance 265mm)

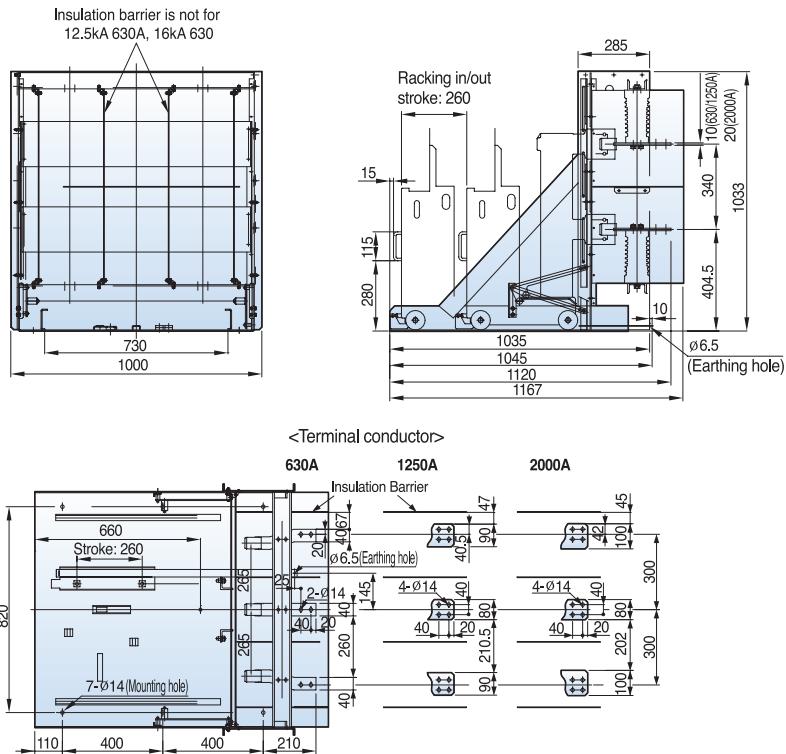

24/25.8kV 12.5/16/25kA 630/1250A

Withdrawable (G type cradle Tulip contact, phase distance 265mm)

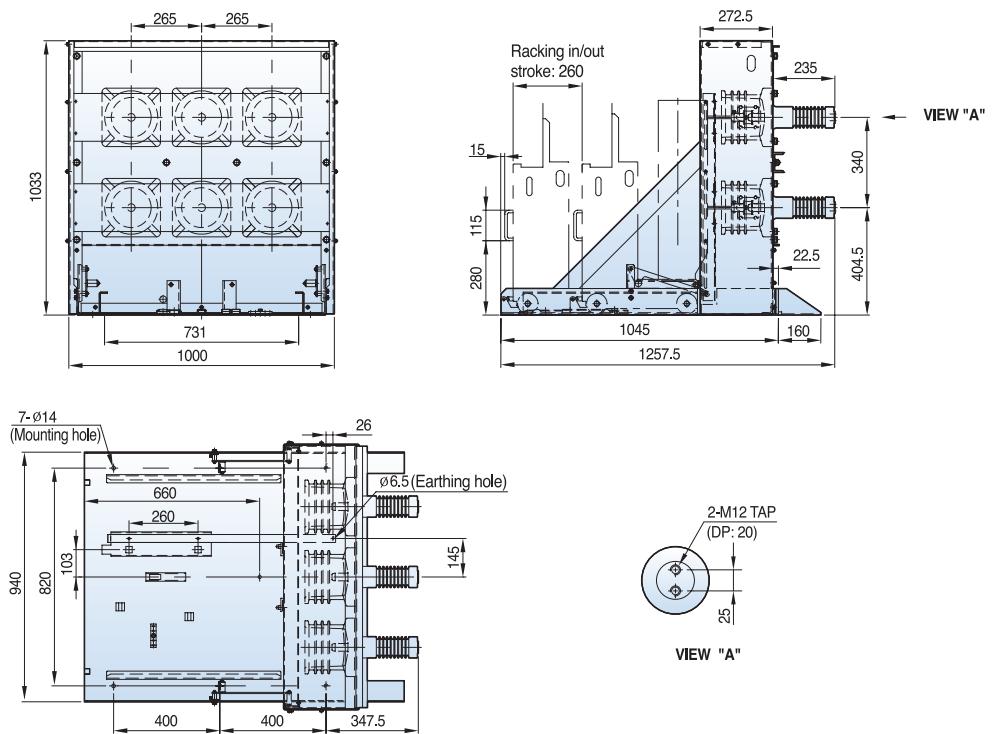

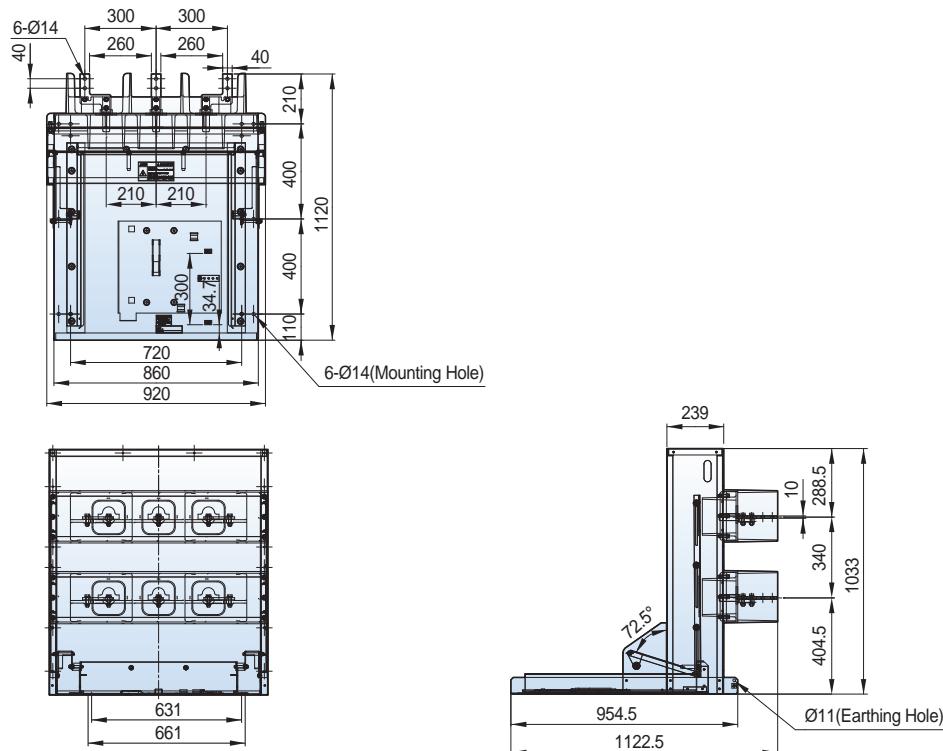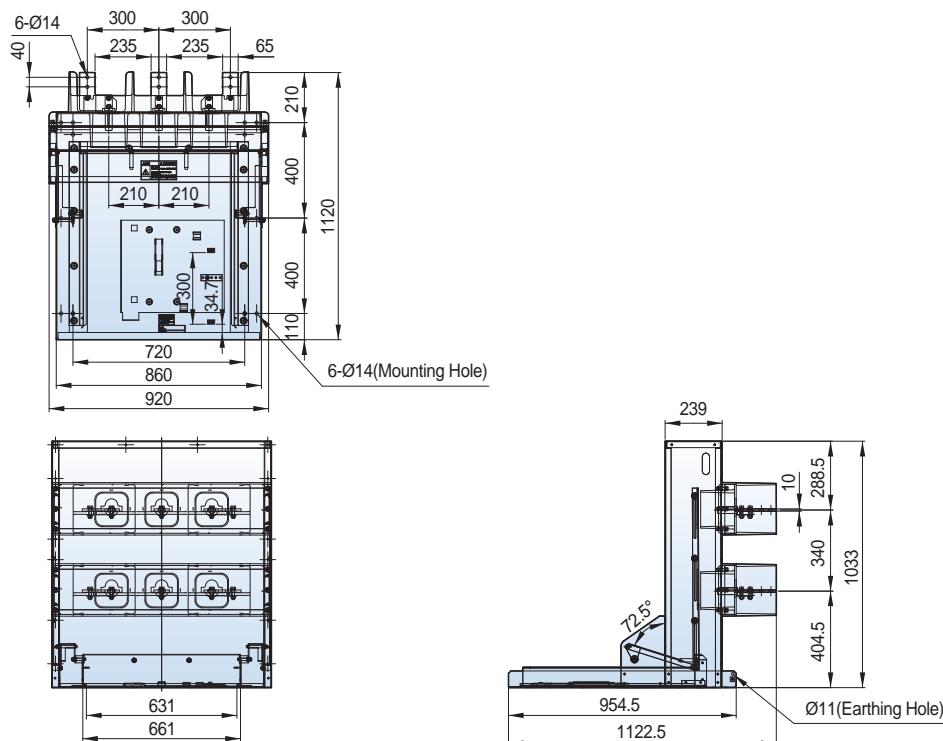
Susol**24/25.8kV 12.5/16/25kA 630A****Withdrawable (G type cradle, Tulip contact, phase distance 210mm)****24/25.8kV 12.5/16/25kA 1250A****Withdrawable (G type cradle, Tulip contact, phase distance 210mm)**

Dimensions - VL type

Susol


24/25.8kV 12.5/16/25kA 2000A

Withdrawable (G type cradle, Tulip contact, phase distance 210mm)

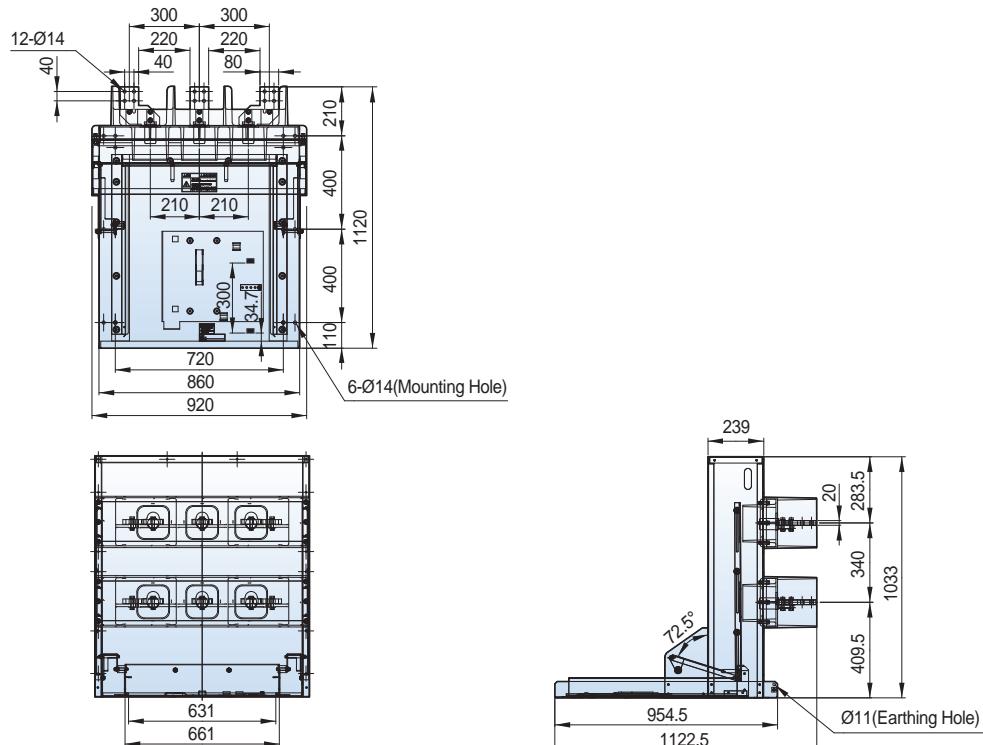

24/25.8kV 12.5/16/25kA 630/1250/2000A

Withdrawable (K type cradle Enclosed, Tulip contact, phase distance 210/265mm)

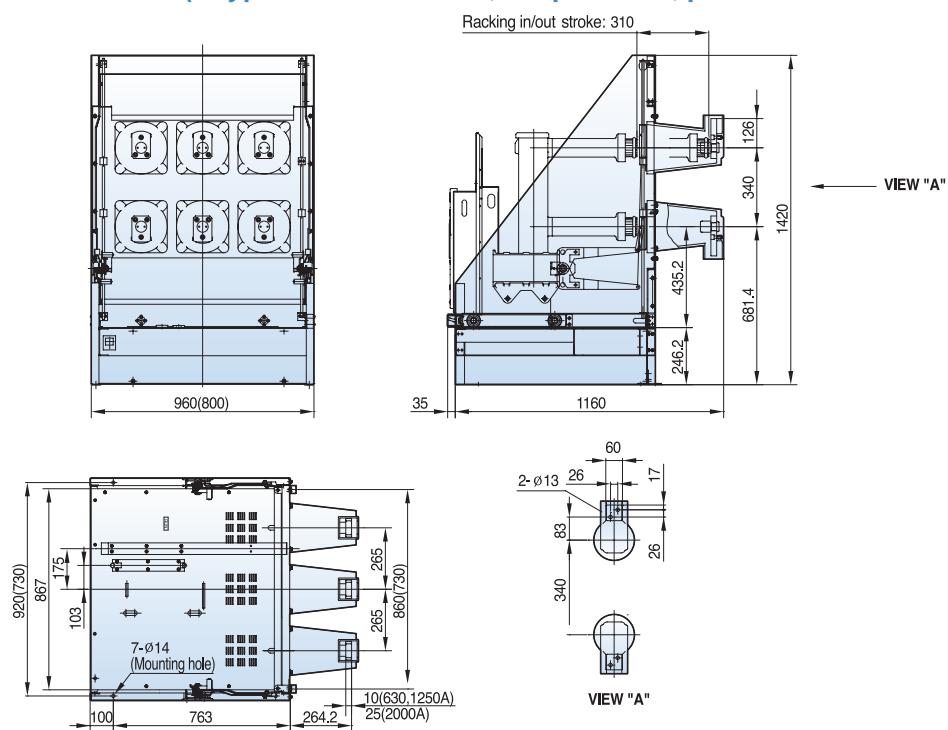


Note) In case of phase distance 210mm () means dimensions and 630A, 1250A are available only
Items : VCL-20K13B06, VCL-20K13B13, (G-type closed Tulip way, 630A, 1250A)

Susol

24/25.8kV 12.5/16/25kA 630/1250A

Withdrawable (H type cradle, phase distance 210mm)

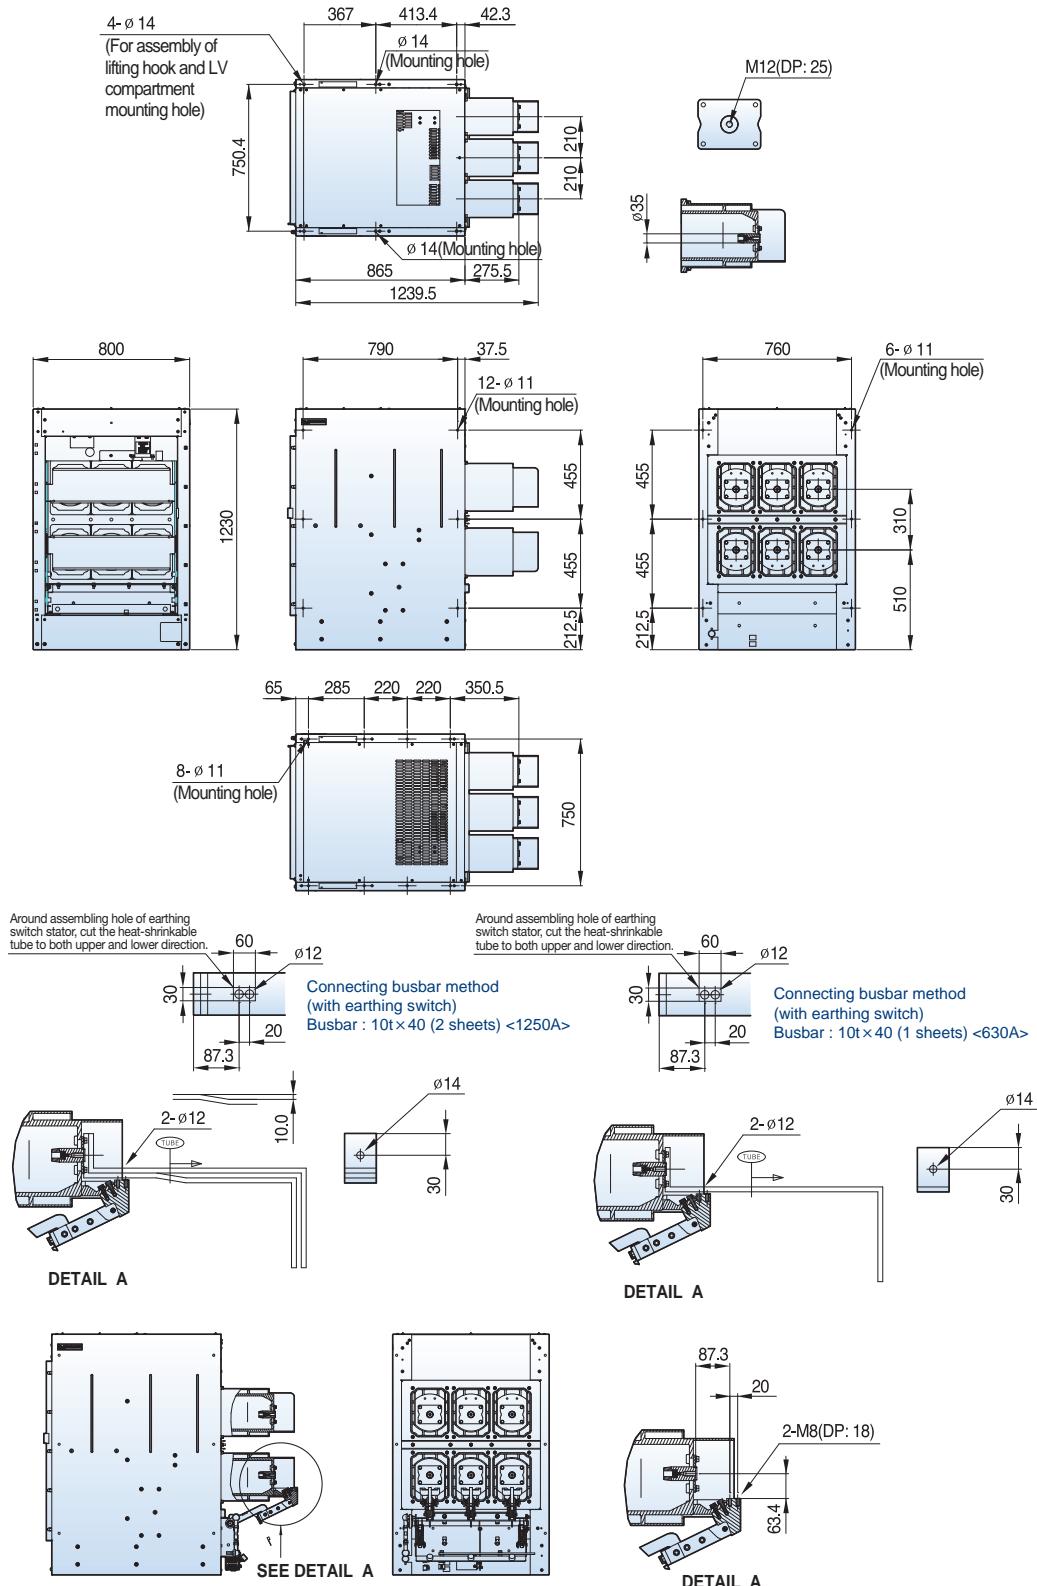



Dimensions - VL type

Susol

24/25.8kV 12.5/16/25kA 630/1250A

Withdrawable (H type cradle, phase distance 275mm)

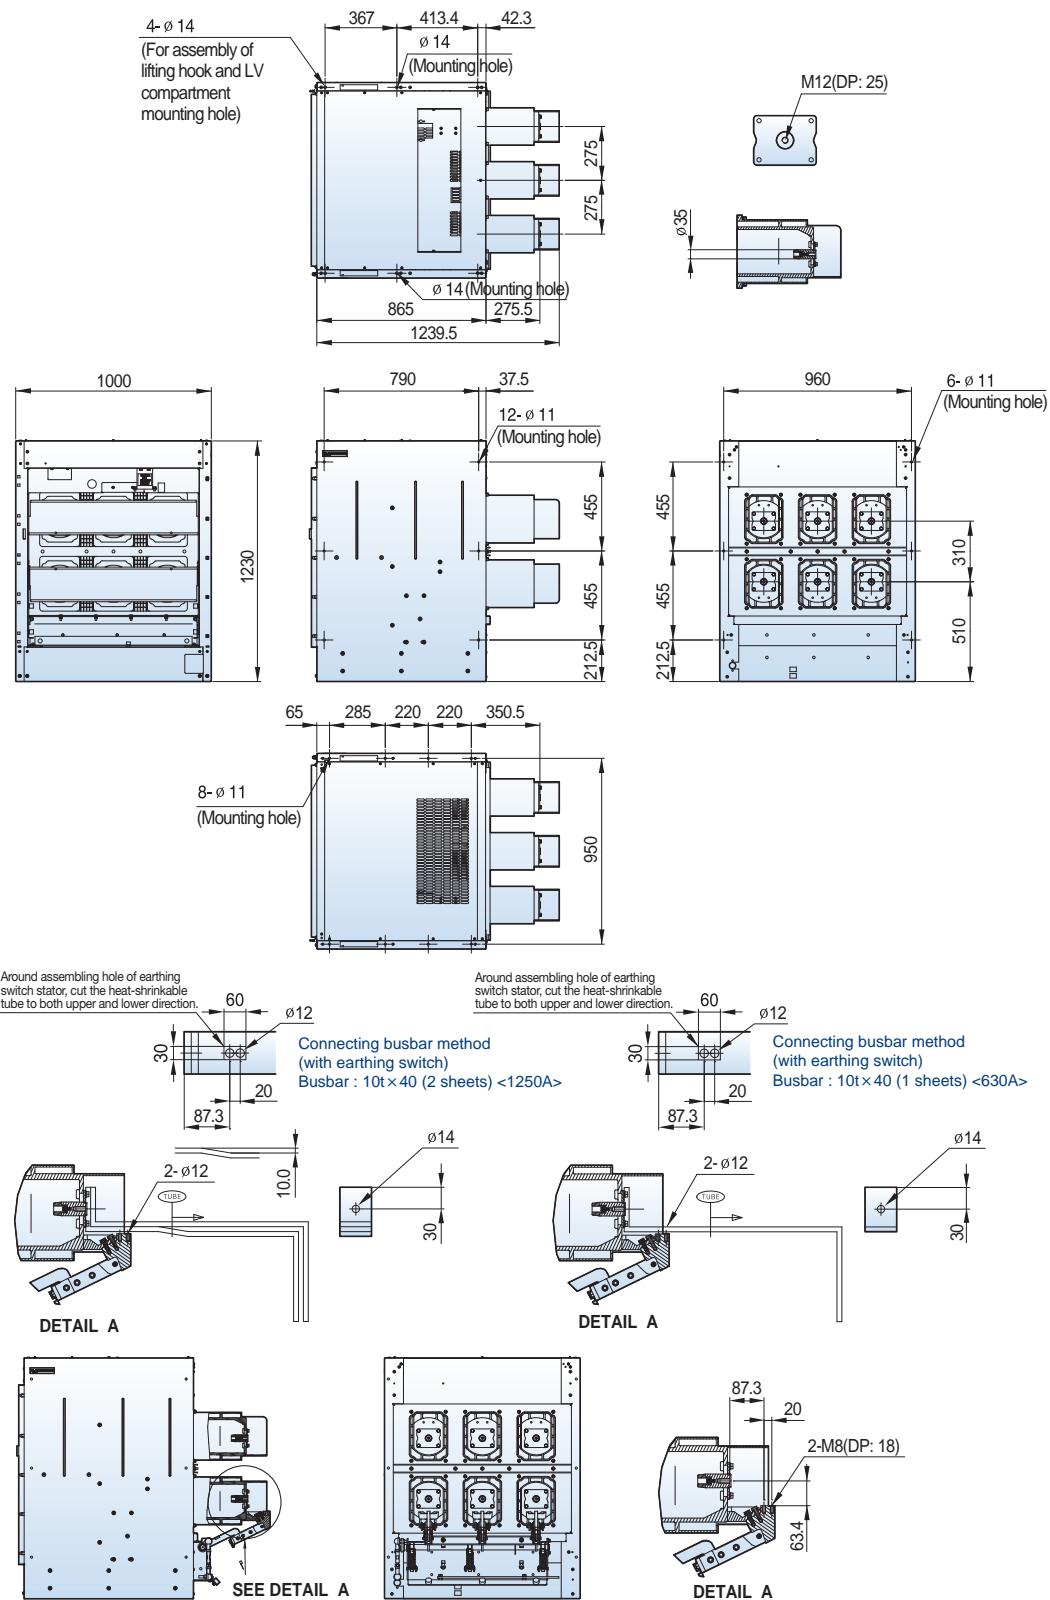

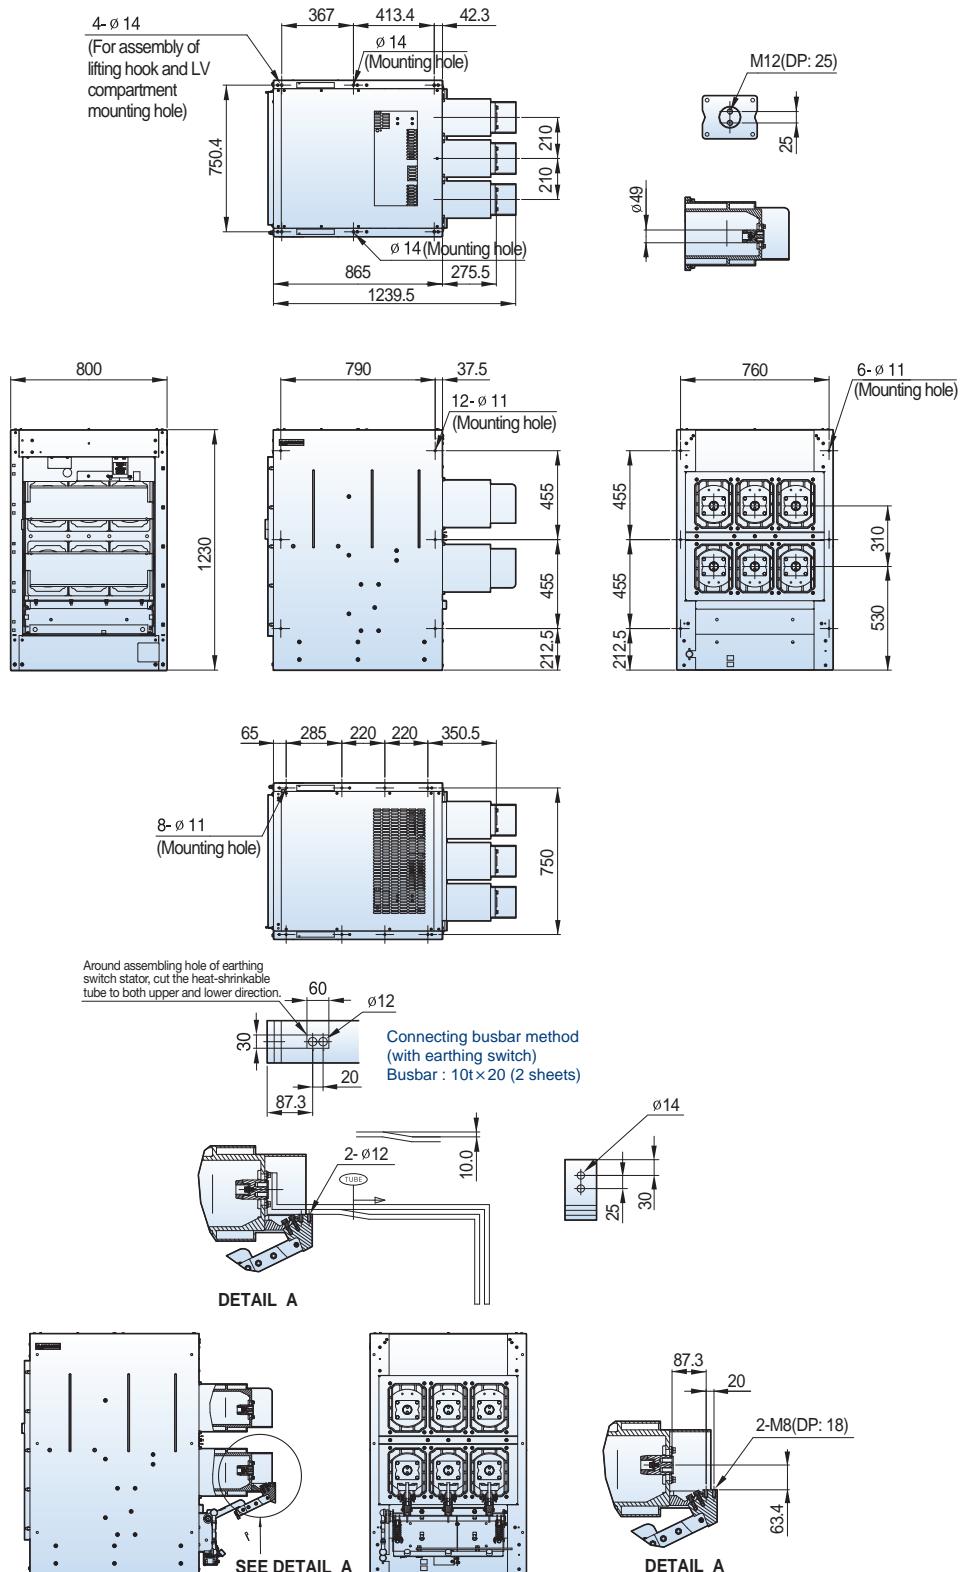
Susol**24/25.8kV 25kA 2000A****Withdrawable (H type cradle, phase distance 210mm)**

Dimensions - VL type

Susol

24/25.8kV 25kA 2000A


Withdrawable (H type cradle, phase distance 275mm)

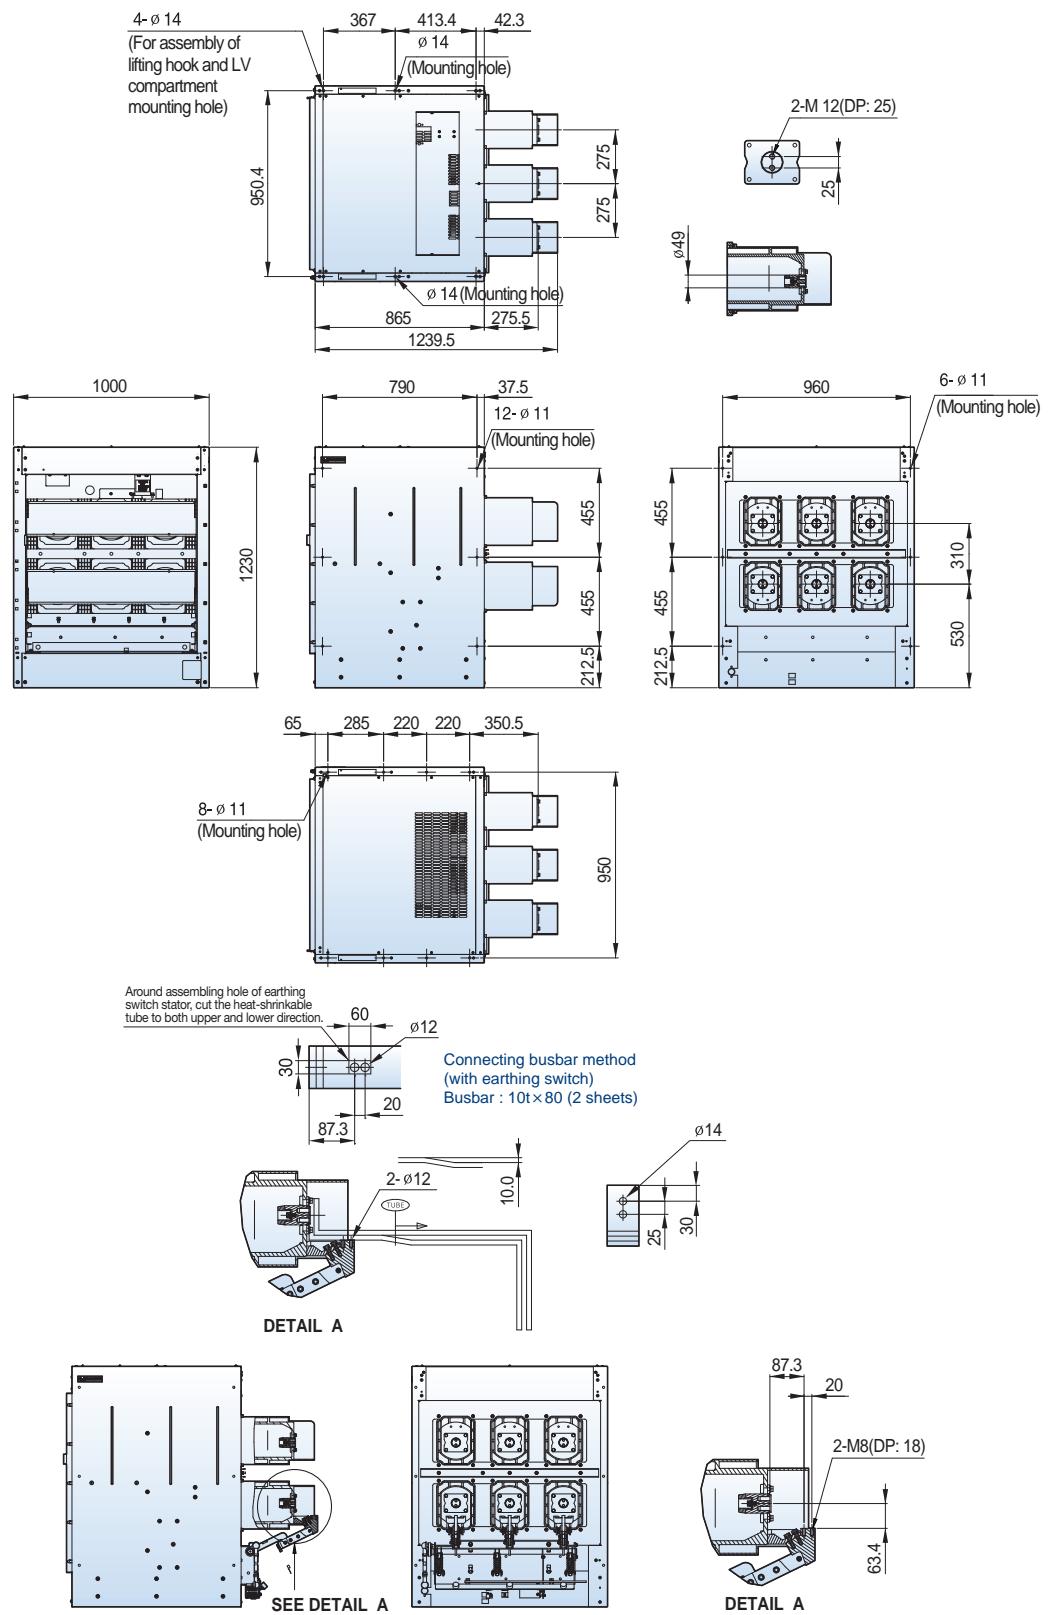

Susol

24/25.8kV 25kA 2500A

Withdrawable (H type cradle, phase distance 275mm)

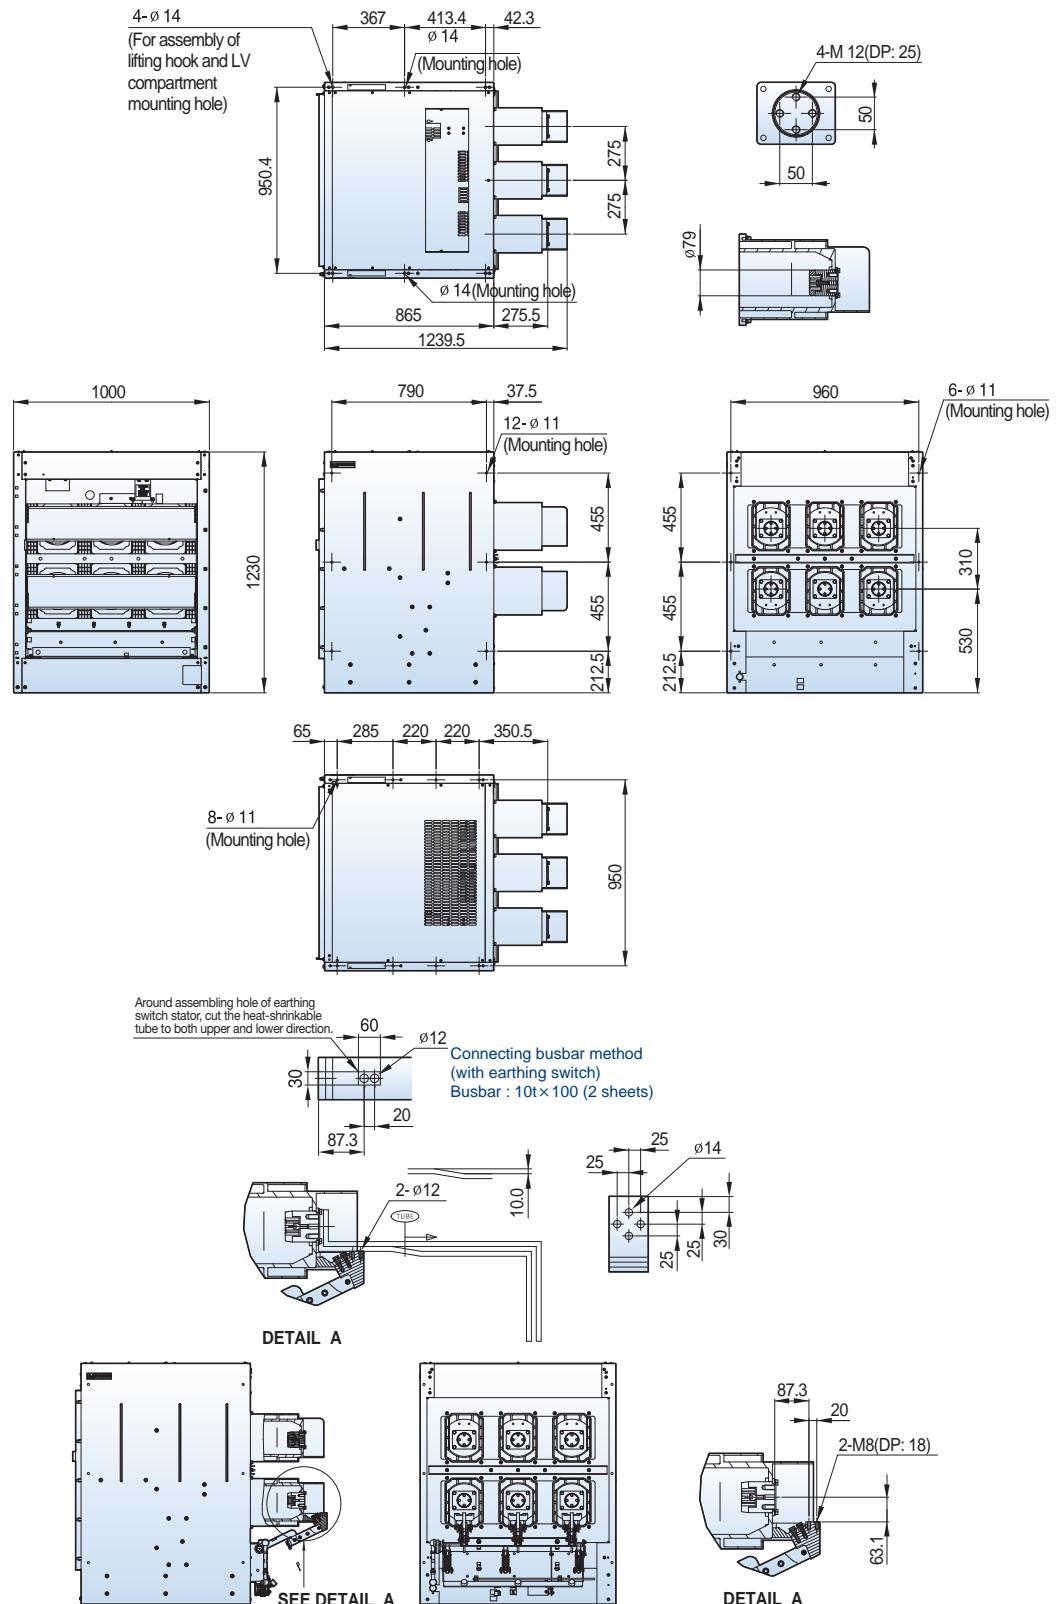


Dimensions - VL type


Susol

36kV 25kA 630/1250A

Fixed (P type, phase distance 275mm)

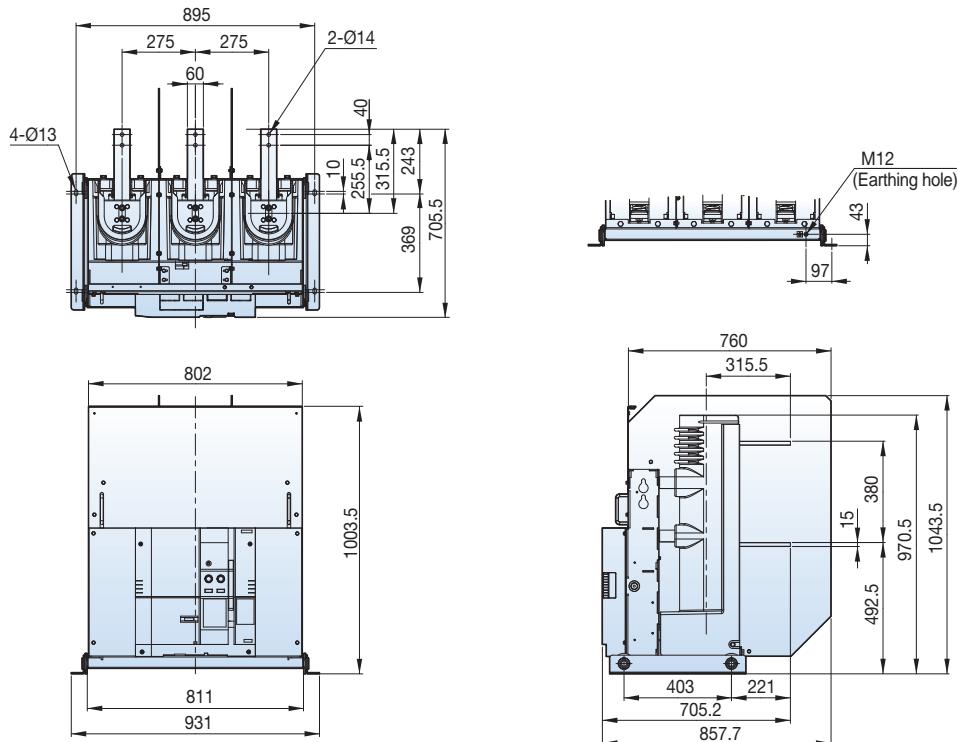


Withdrawable (H type unit, phase distance 275mm)

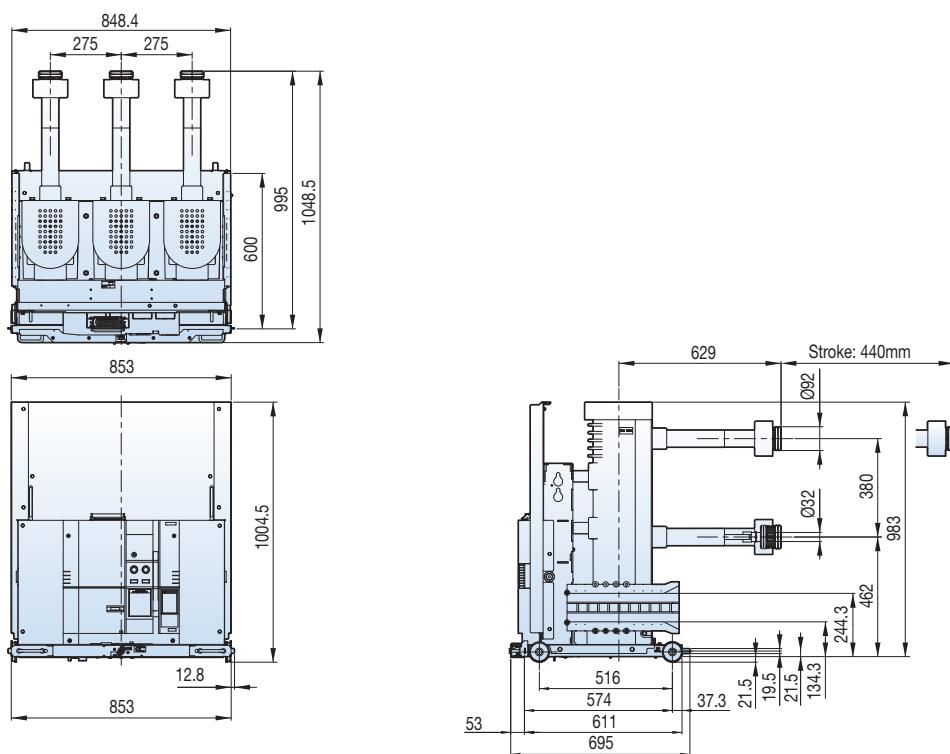

Susol

36kV 25kA 630/1250A

Withdrawable (H type cradle, phase distance 275mm)

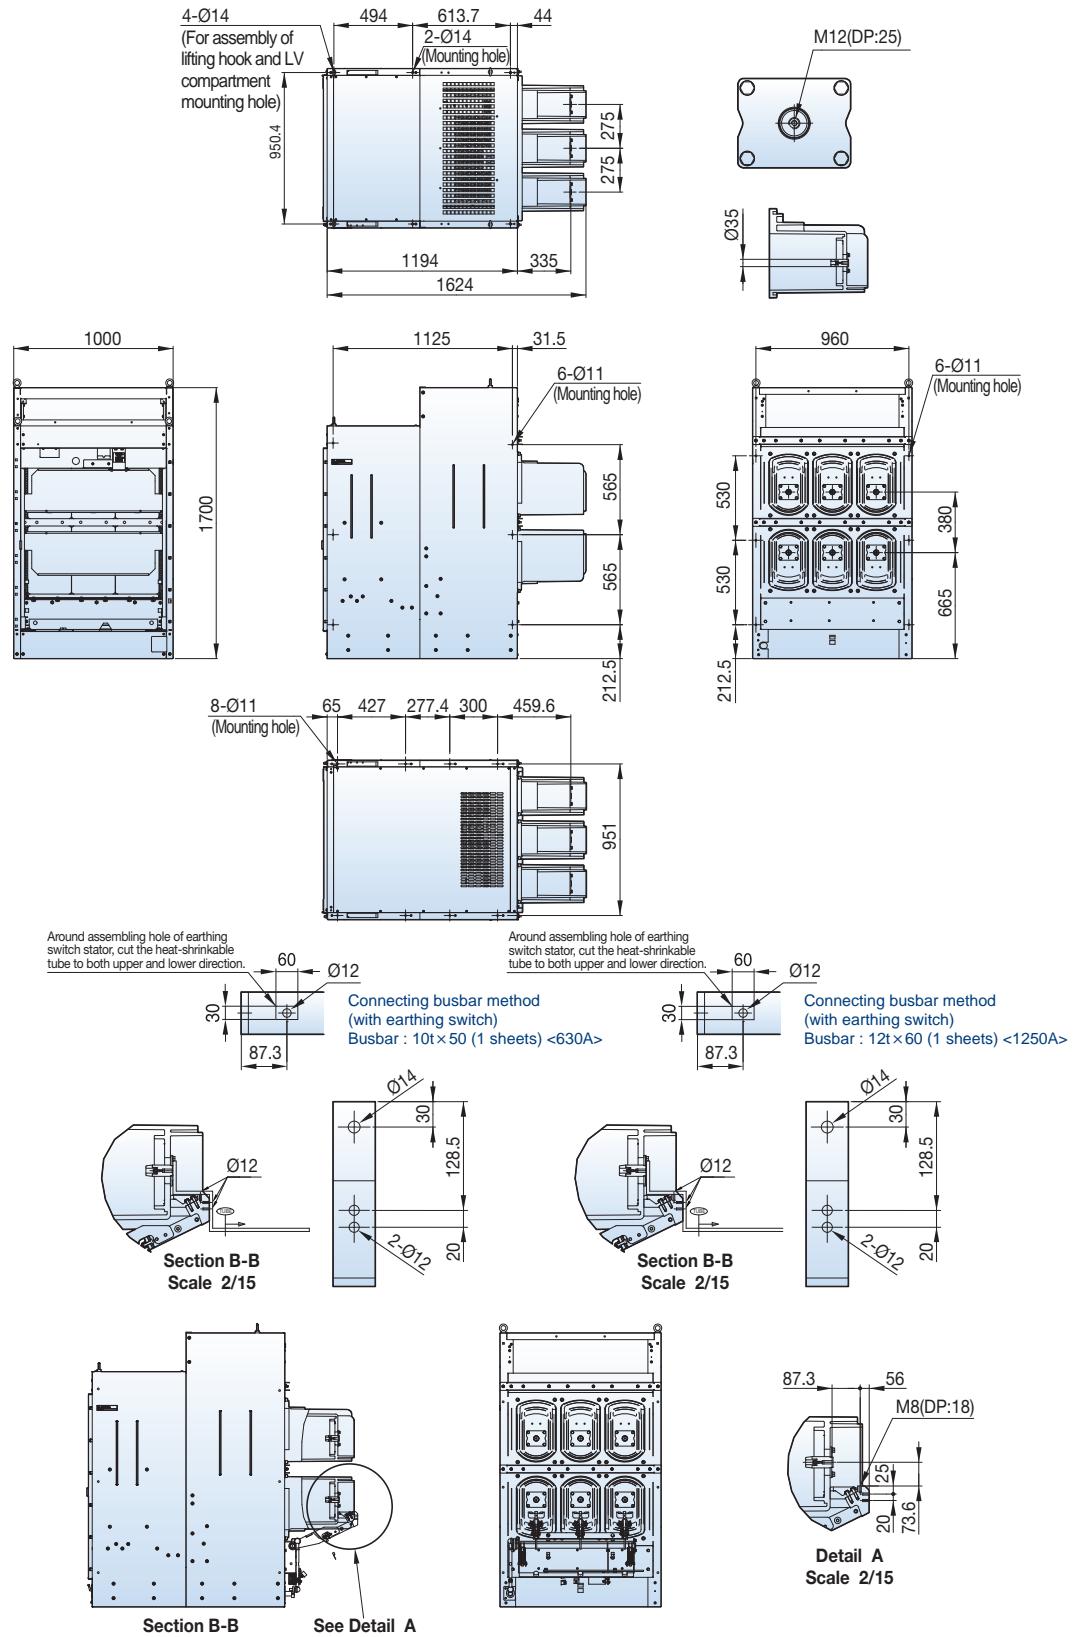


Dimensions - VL type


Susol

36kV 25kA 2000A


Fixed (P type, phase distance 275mm)

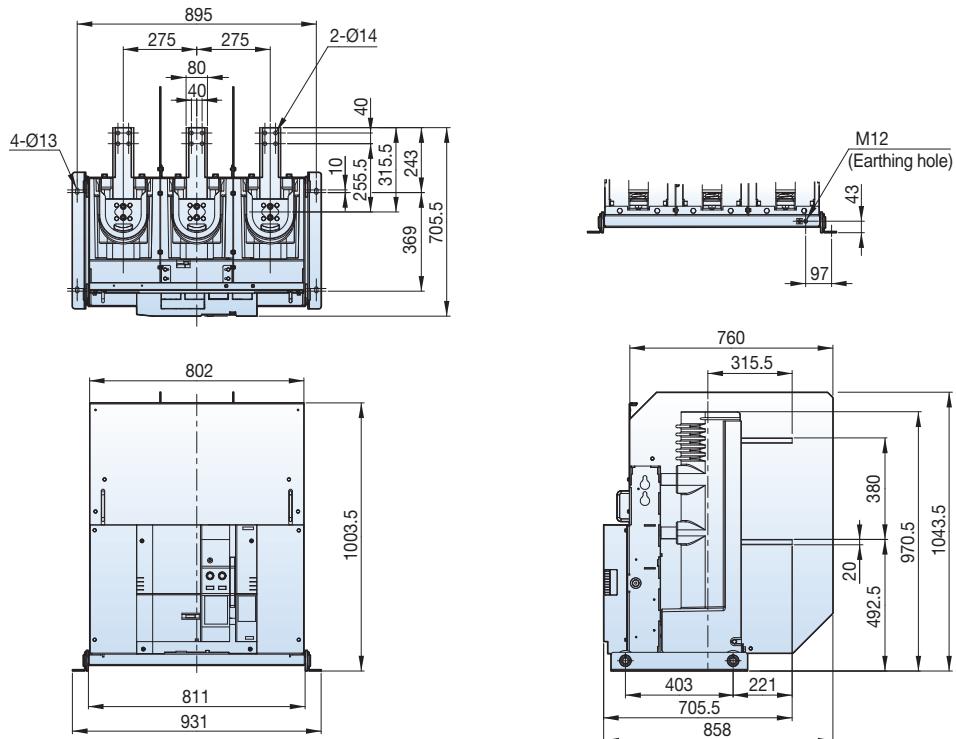

Withdrawable (H type unit, phase distance 275mm)

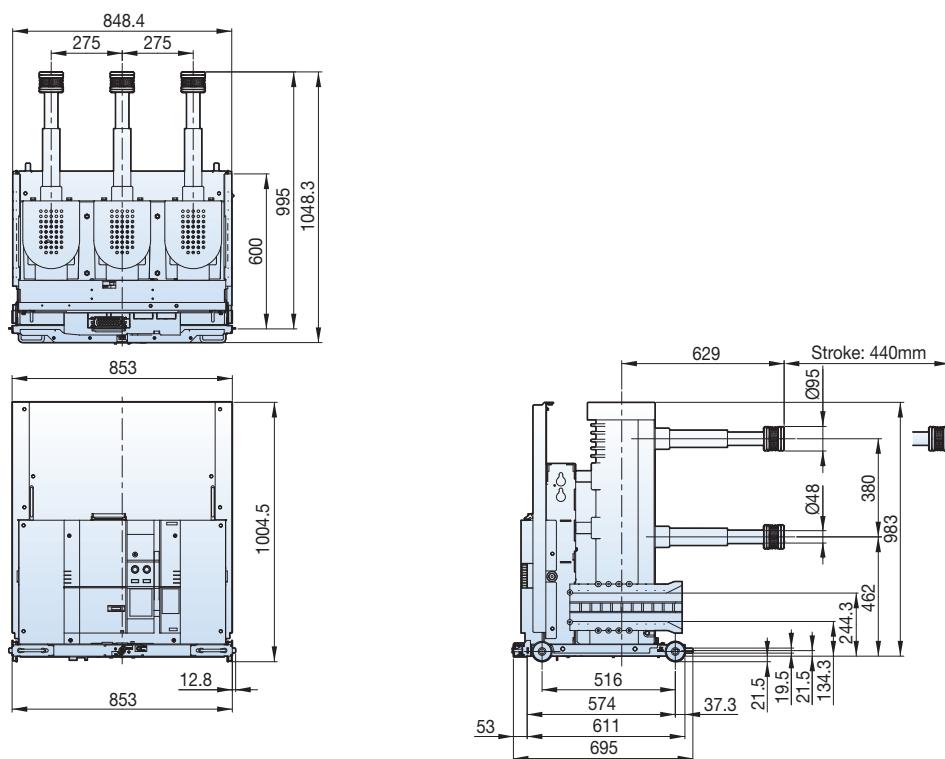

Susol

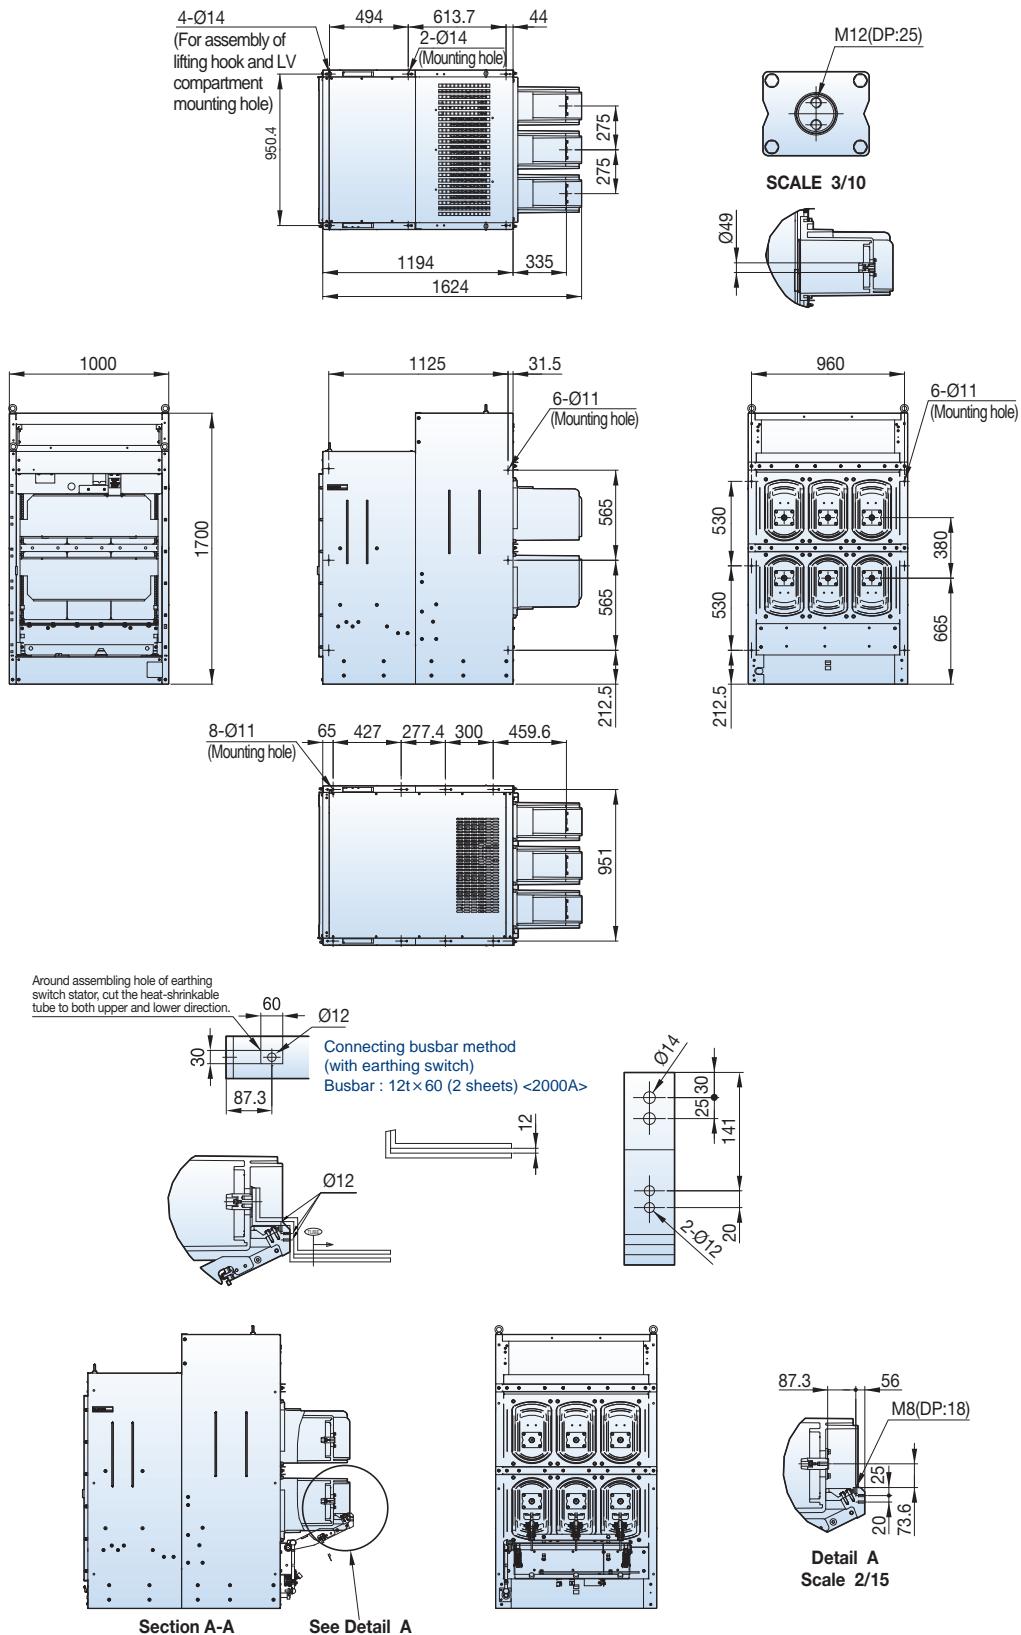
36kV 25kA 2000A**Withdrawable (H type cradle, phase distance 275mm)**

Dimensions - VL type


Susol

36kV 25kA 2500A

Fixed (P type, phase distance 275mm)

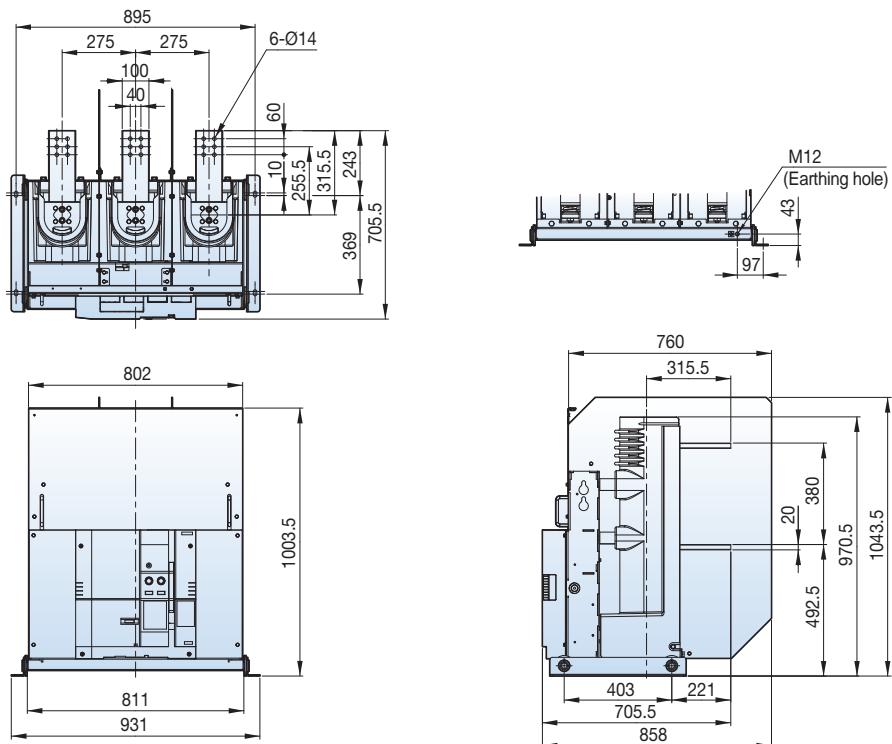


Withdrawable (H type unit, phase distance 275mm)

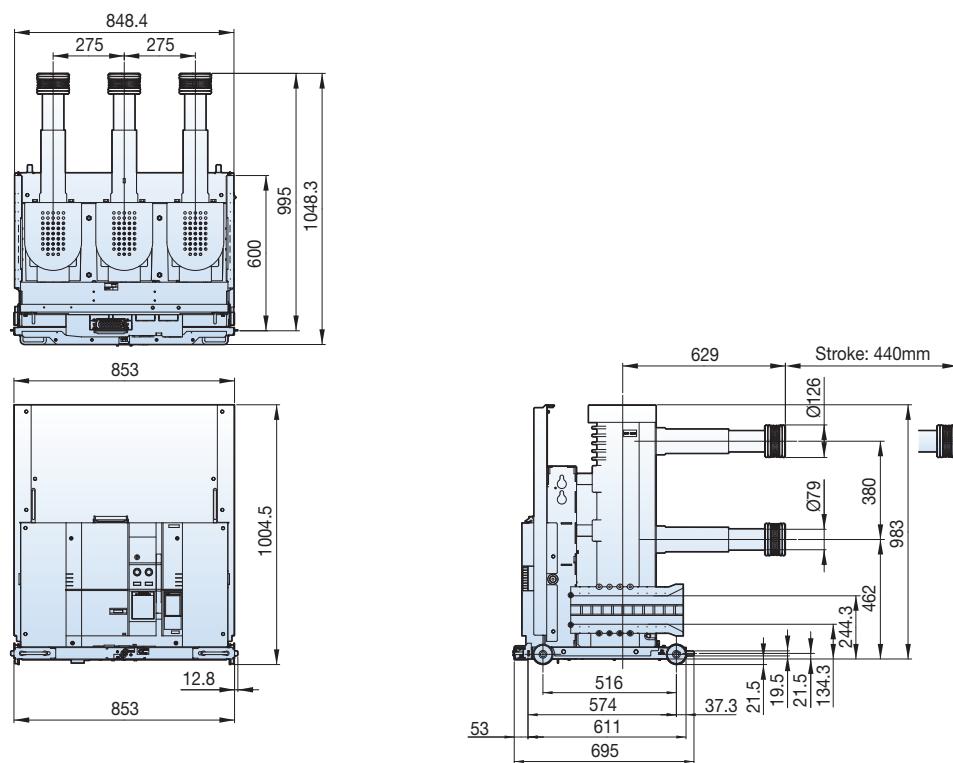

Susol

36kV 25kA 2500A

Withdrawable (H type cradle, phase distance 275mm)

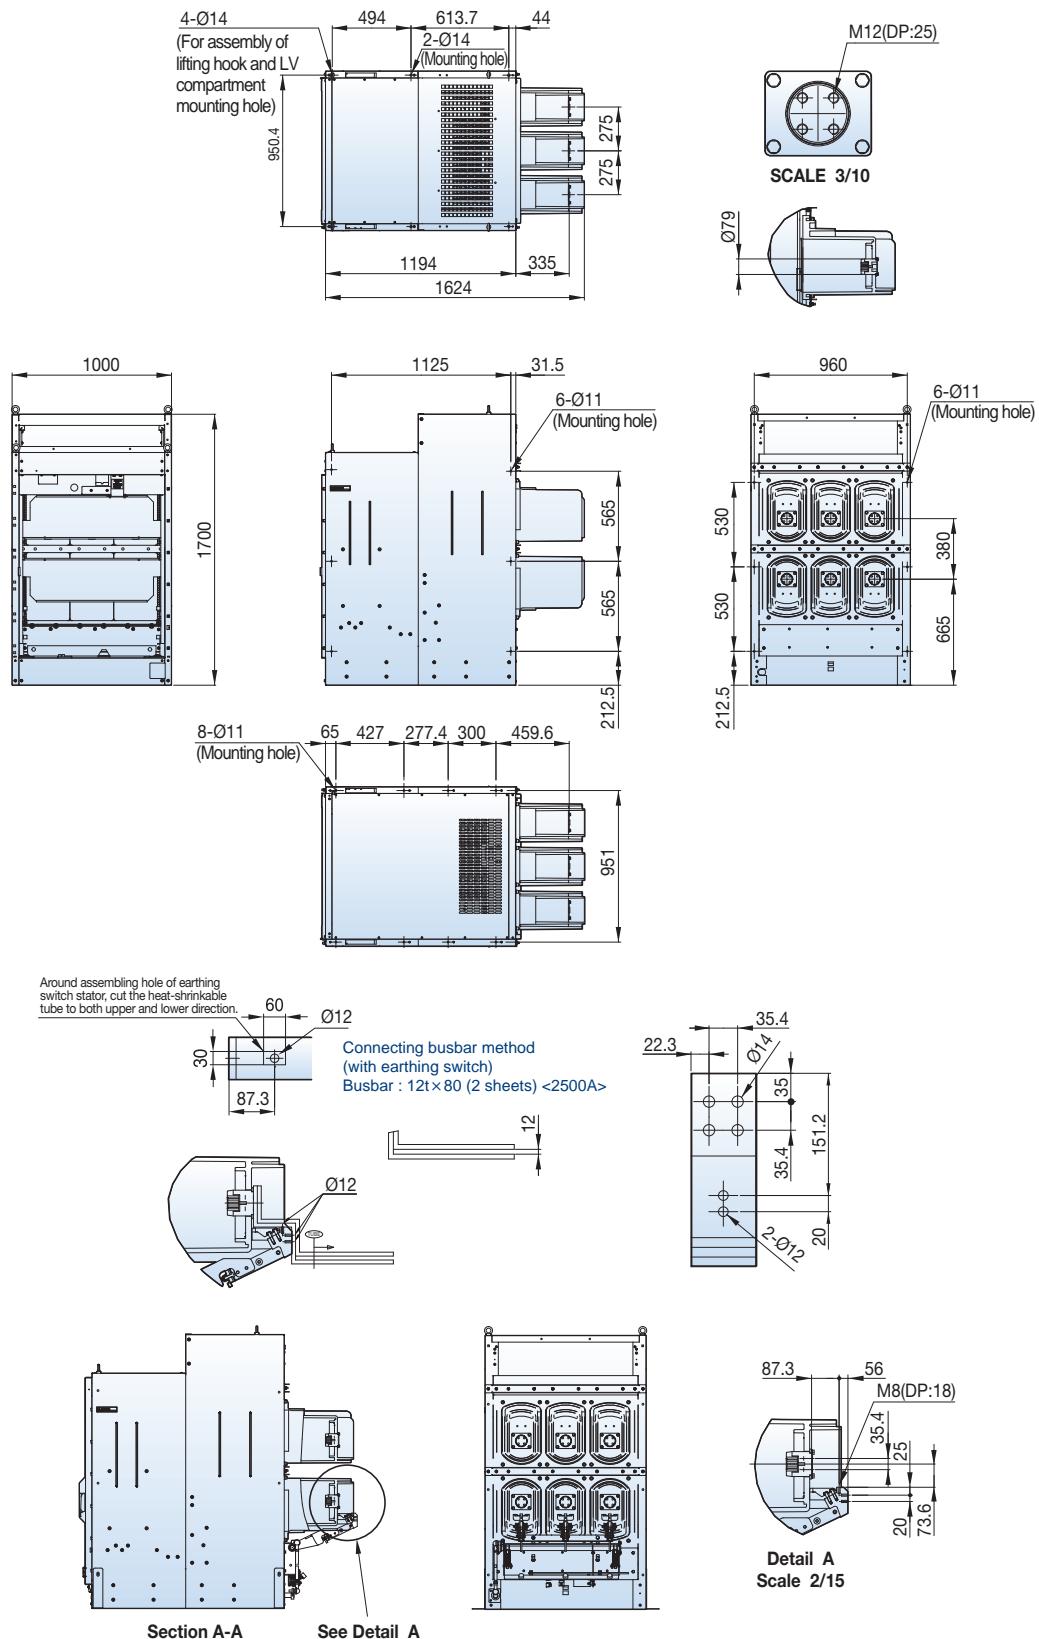


Dimensions - LVB, VH type


Susol

7.2kV, 40kA, 1250/2000A

Fixed (P type, phase distance 150mm)

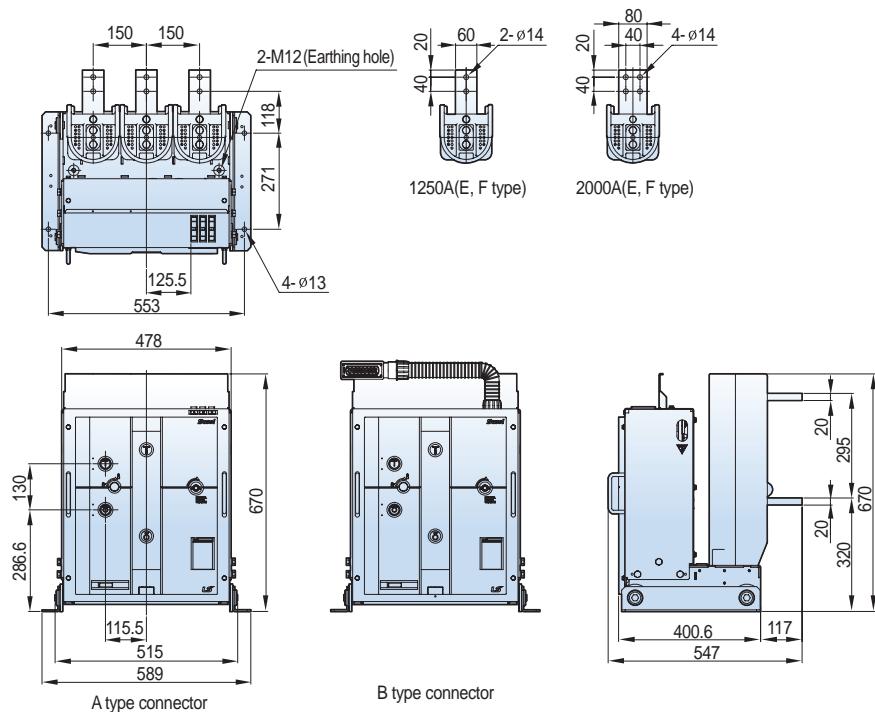


Withdrawable (E,F,G type unit, phase distance 150mm)

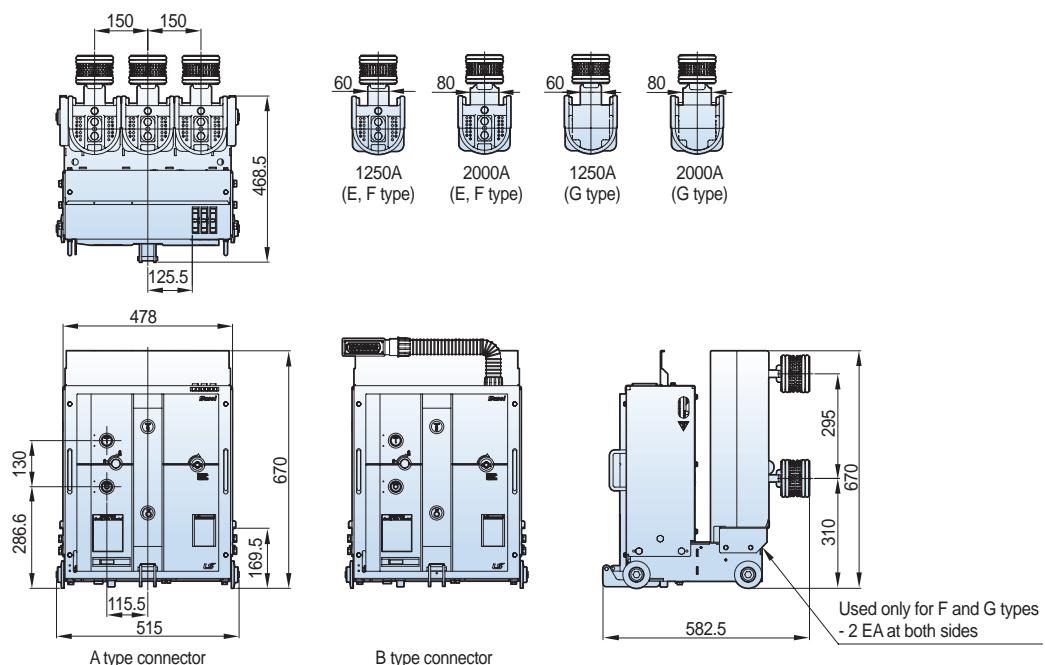

Susol


7.2/12kV, 40kA, 1250/2000A

Withdrawable (MCSG type unit, phase distance 150mm): option type T

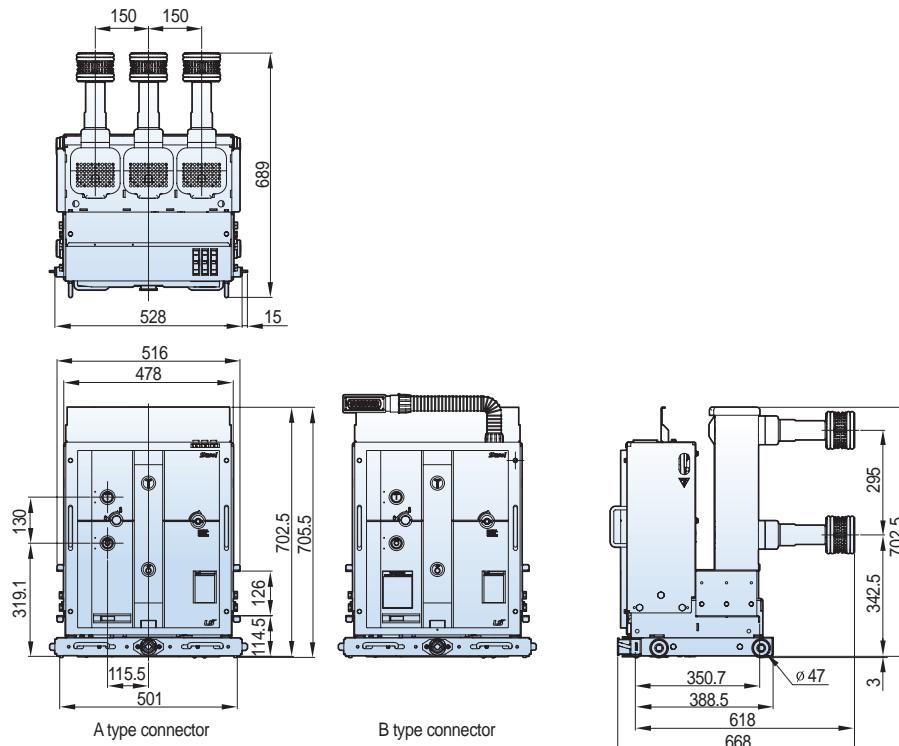

7.2/12kV, 31.5/40kA, 1250/2000A

Withdrawable (MCSG type unit, phase distance 150mm): option type T2(standard)

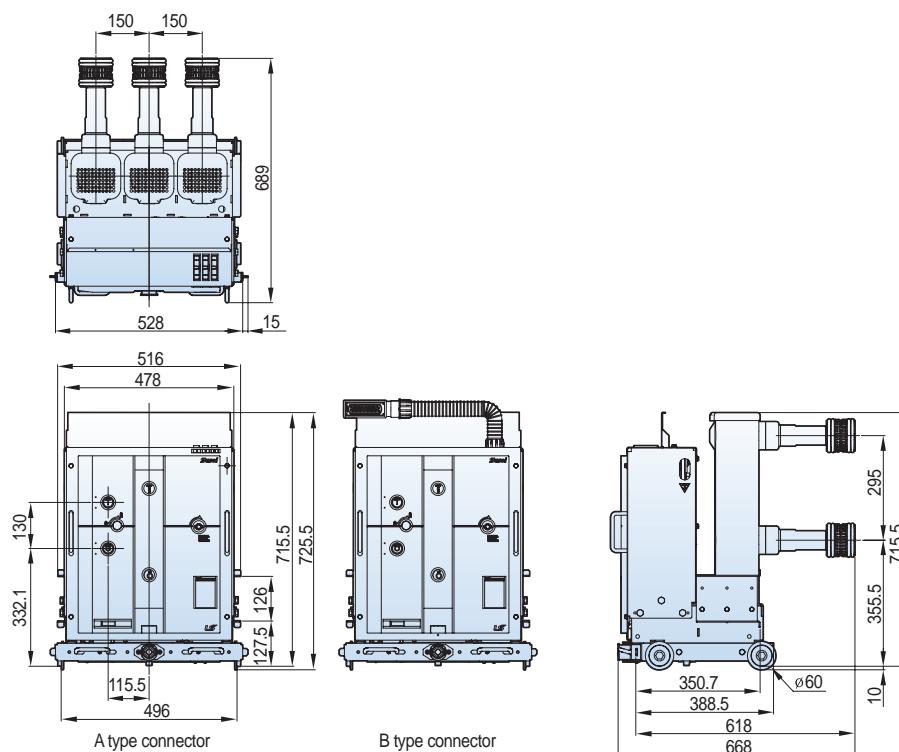


Dimensions - LVB, VH type


Susol





7.2kV, 40kA 1250/2000A

Withdrawable (E type cradle, phase distance 150mm)

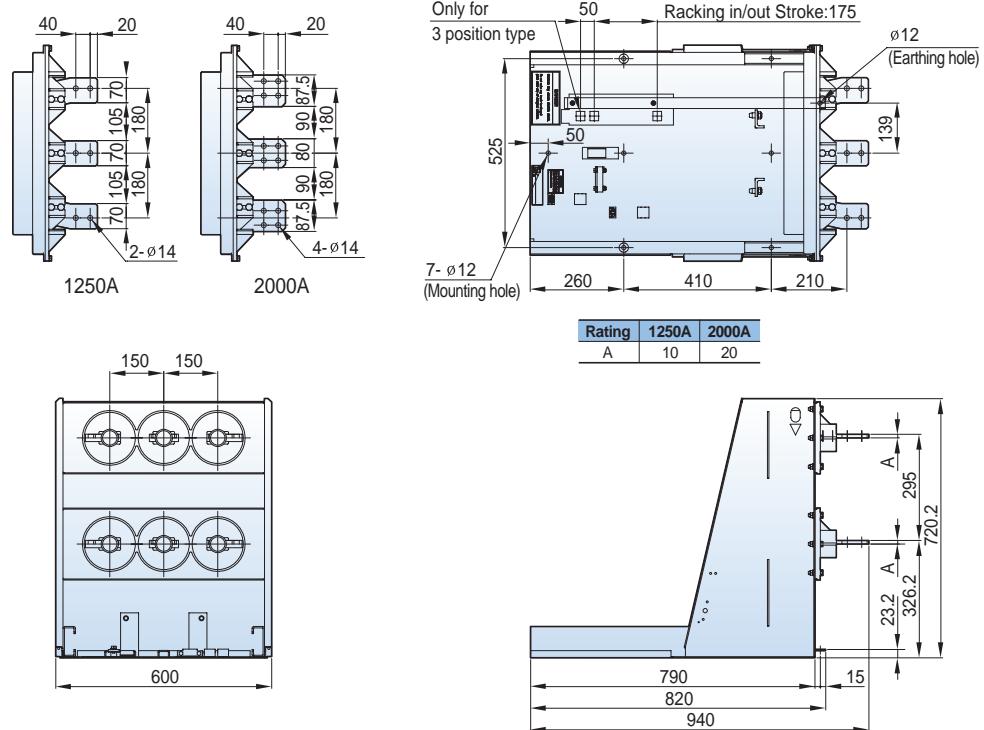

Withdrawable (F, G type cradle, phase distance 150mm)

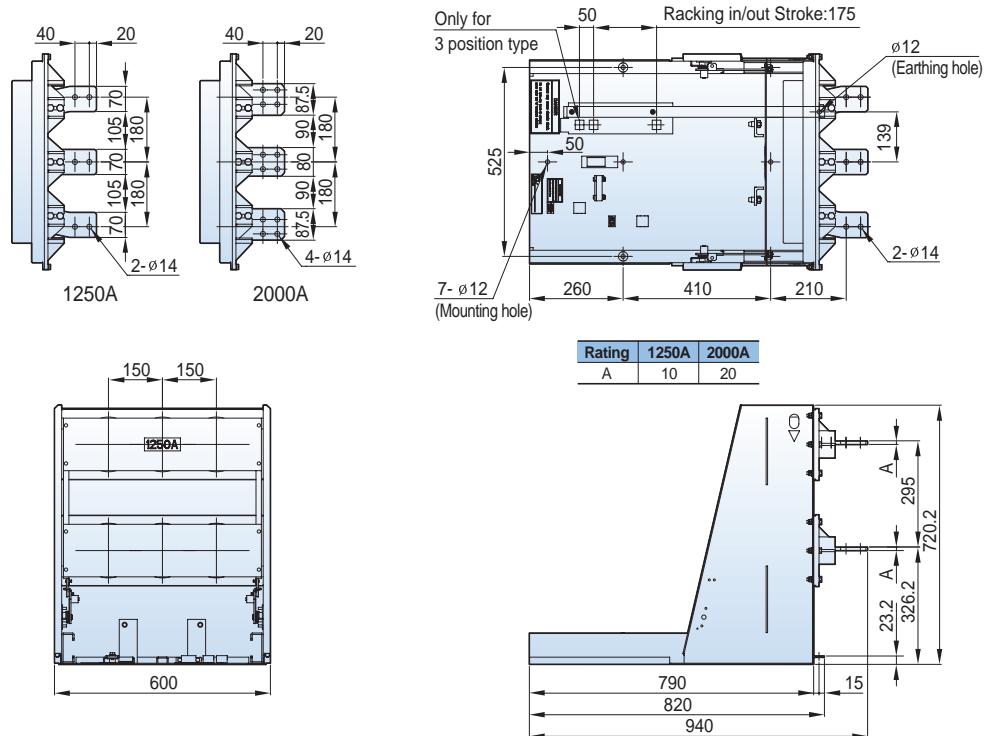

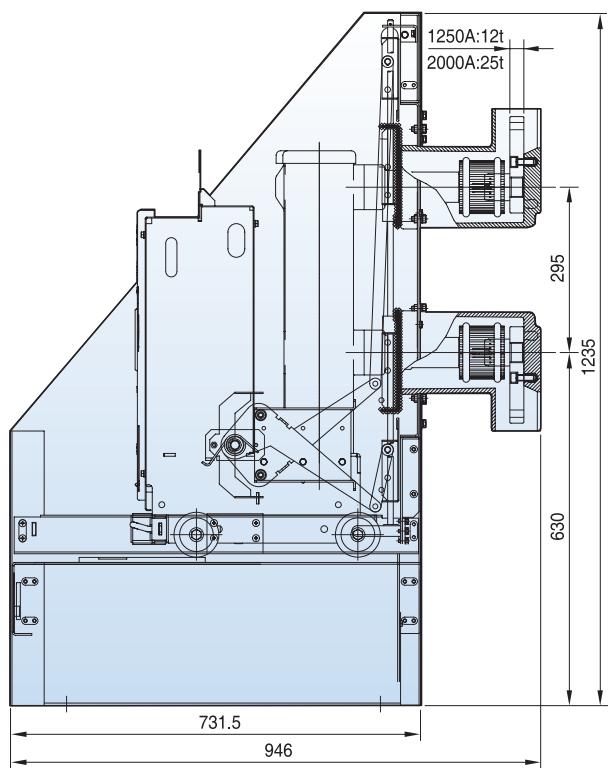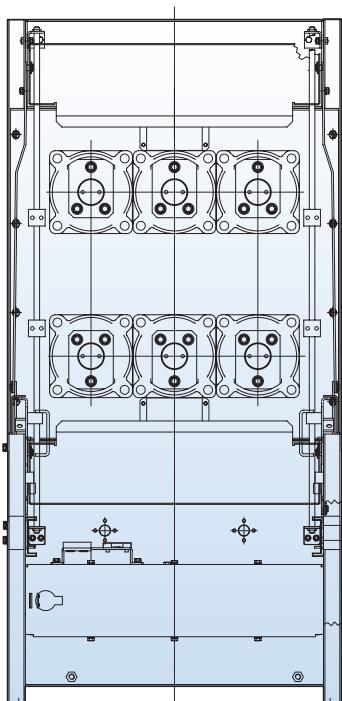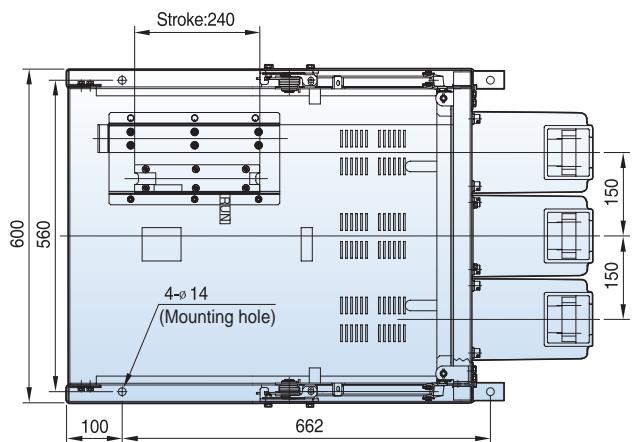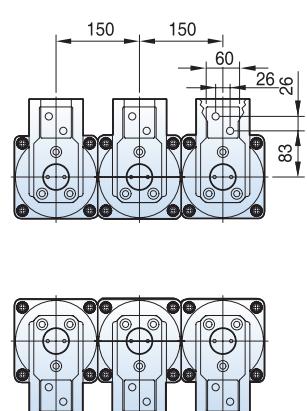
Susol**7.2/12kV, 40kA 1250/2000A****Withdrawable (MCSG type cradle, phase distance 150mm)**

Dimensions - LVB, VH type


Susol

7.2kV, 31.5/40kA, 3150A

Fixed (P type, phase distance 210mm)

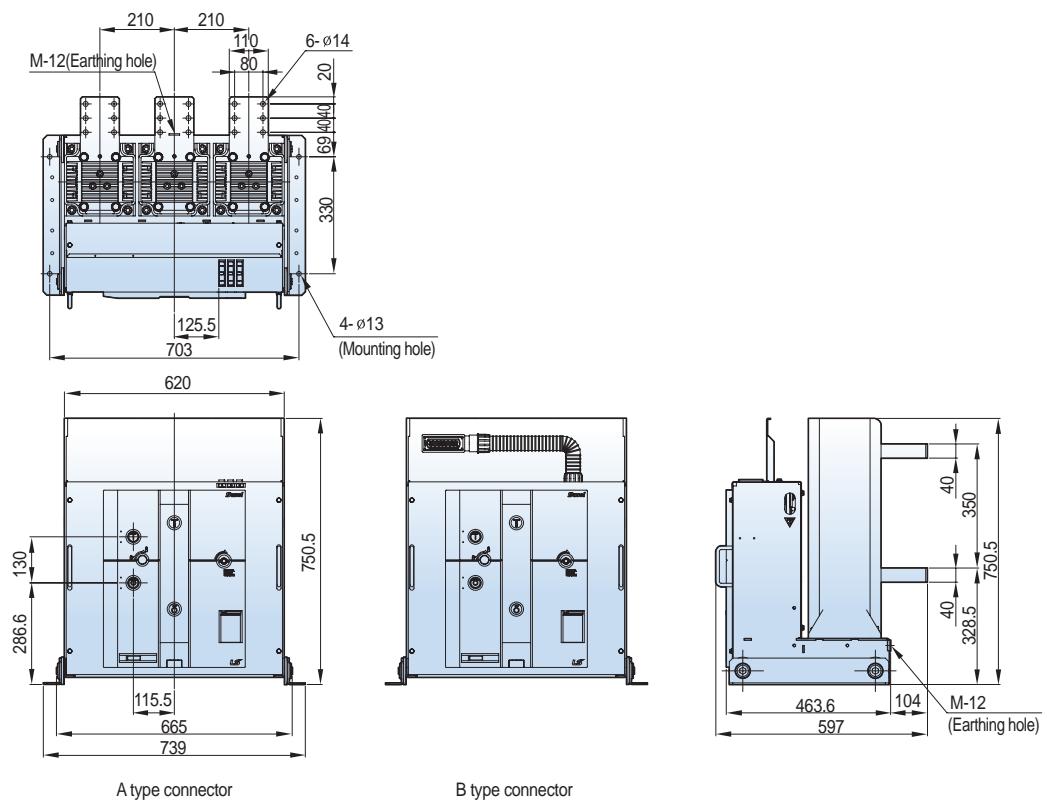


Withdrawable (E,F,G type unit, phase distance 210mm)

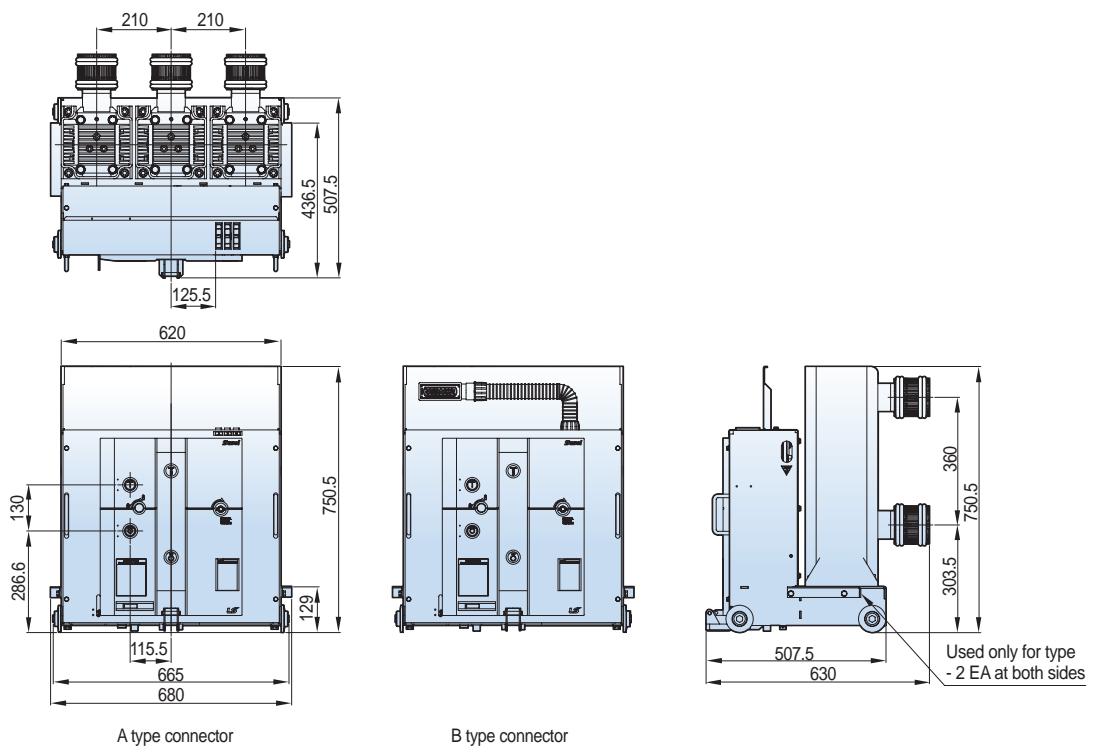

Susol


7.2kV, 31.5/40kA, 3150A

Withdrawable (MCSG type unit, phase distance 210mm)

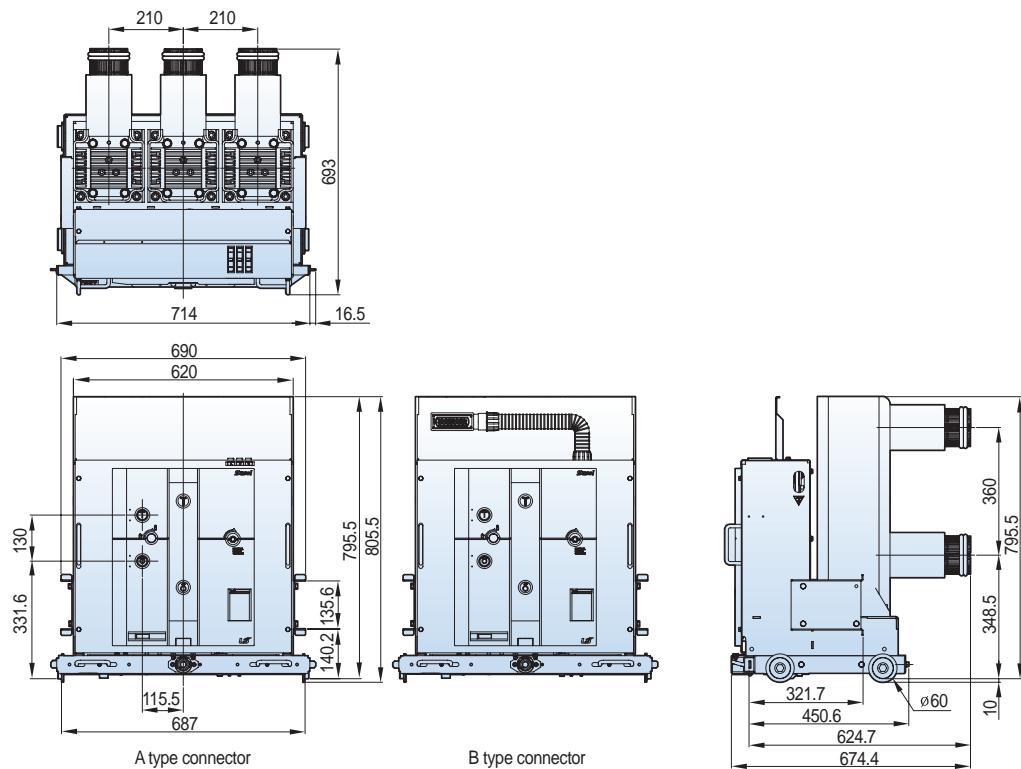

12kV, 31.5/40kA, 3150A

Withdrawable (MCSG type unit, phase distance 210mm)

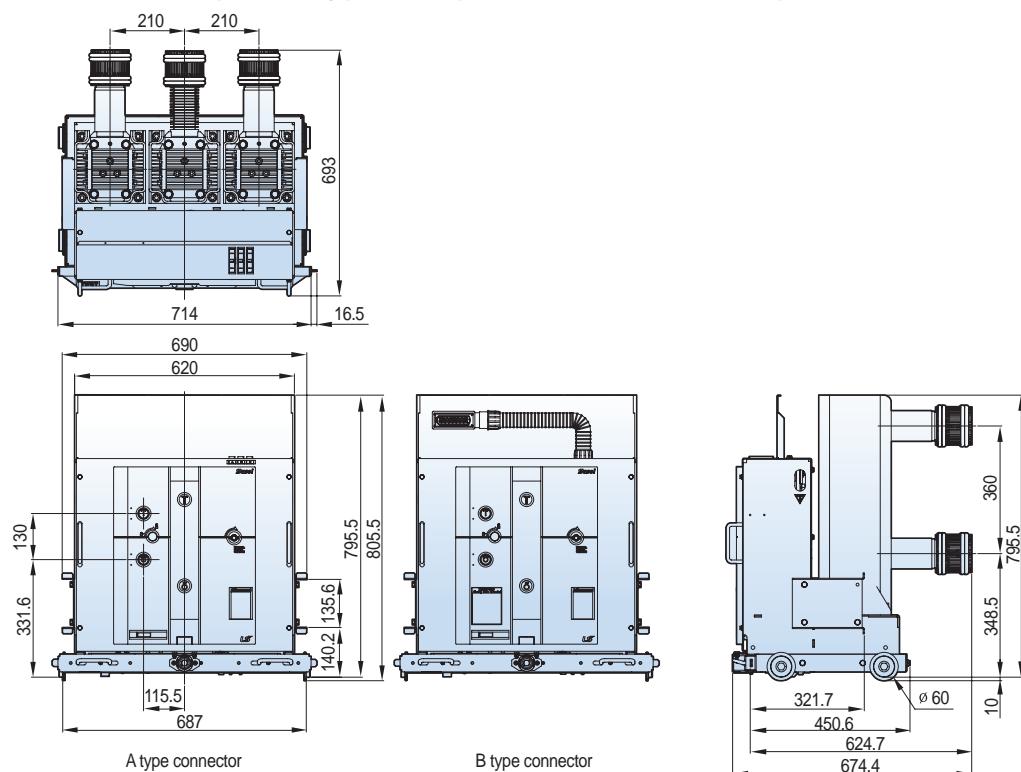


Dimensions - LVB, VH type


Susol

7.2kV, 31.5/40kA 3150A

Withdrawable (E type cradle, phase distance 210mm)

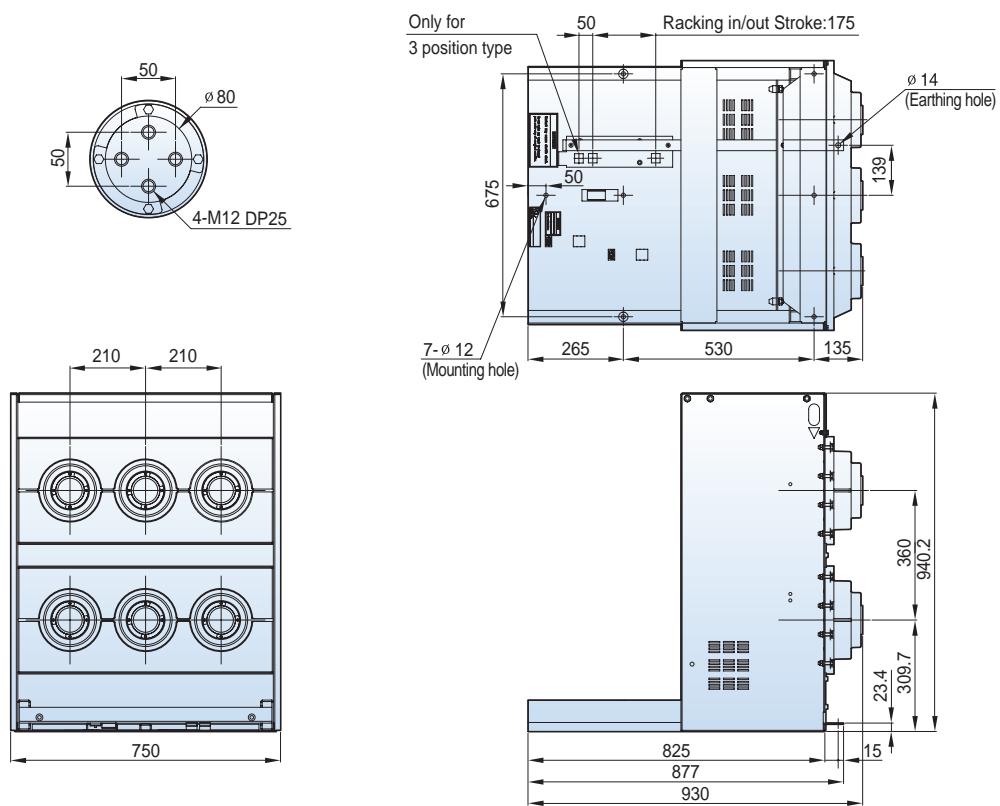






Withdrawable (F,G cradle)

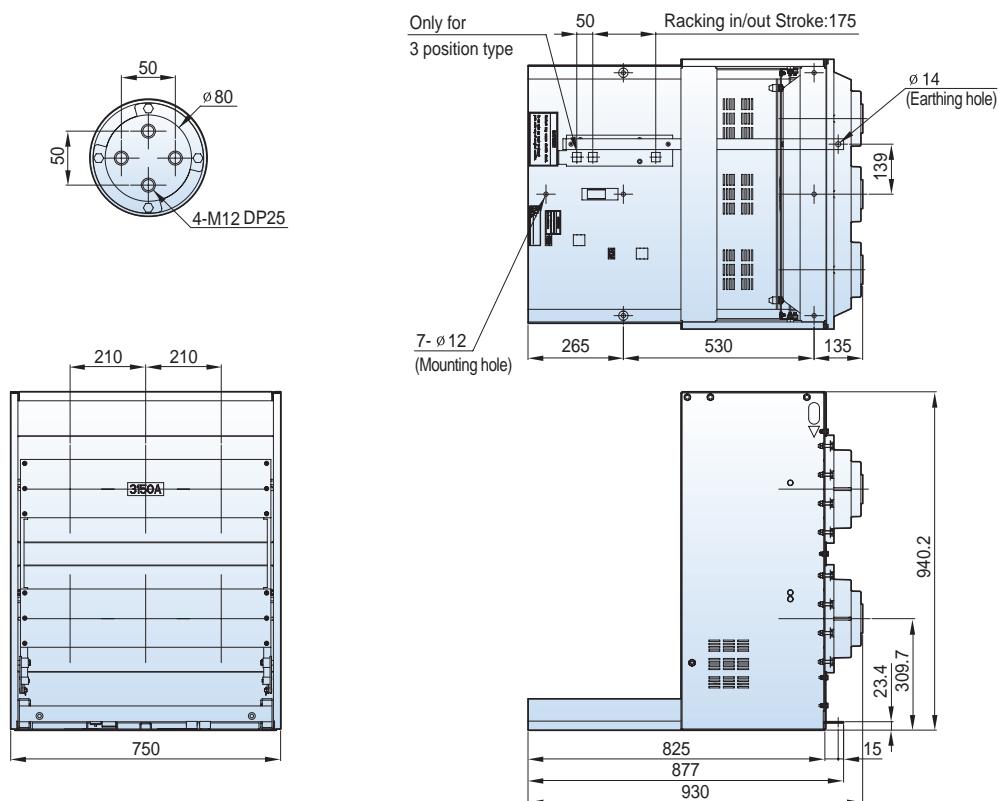

Susol

7.2/12kV, 31.5/40kA 3150A

Withdrawable (MCSG type cradle, phase distance 210mm)

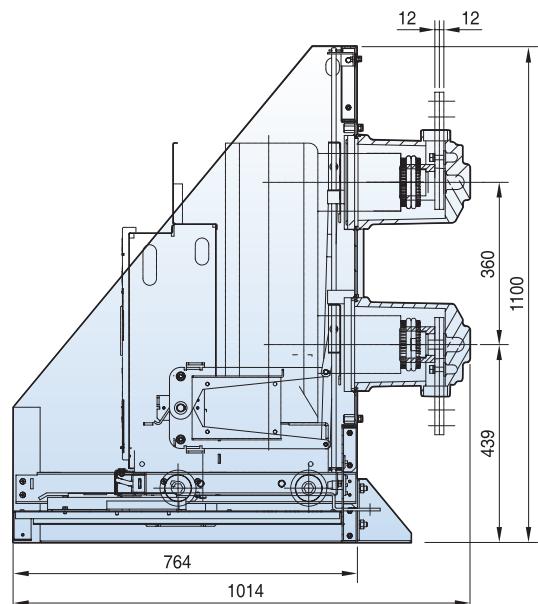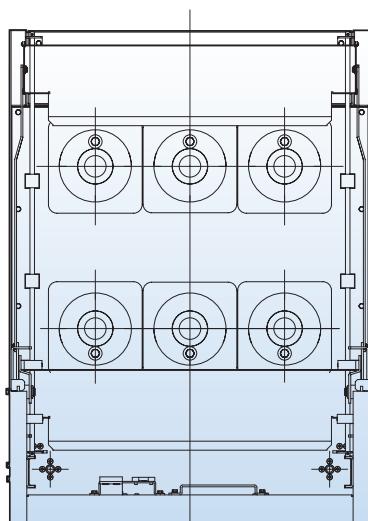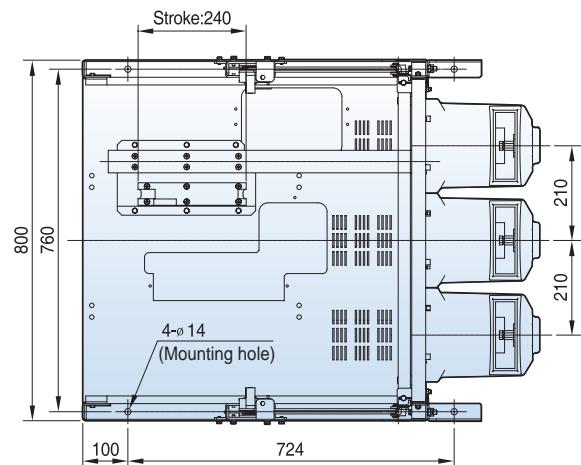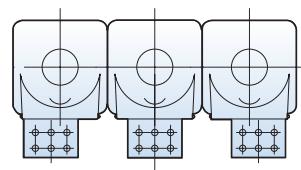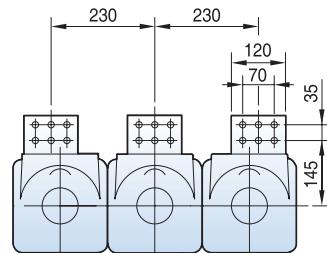


Dimensions -VH type


Susol



7.2kV 40kA 1250/2000A

Withdrawable (Fs type unit, phase distance 150mm)

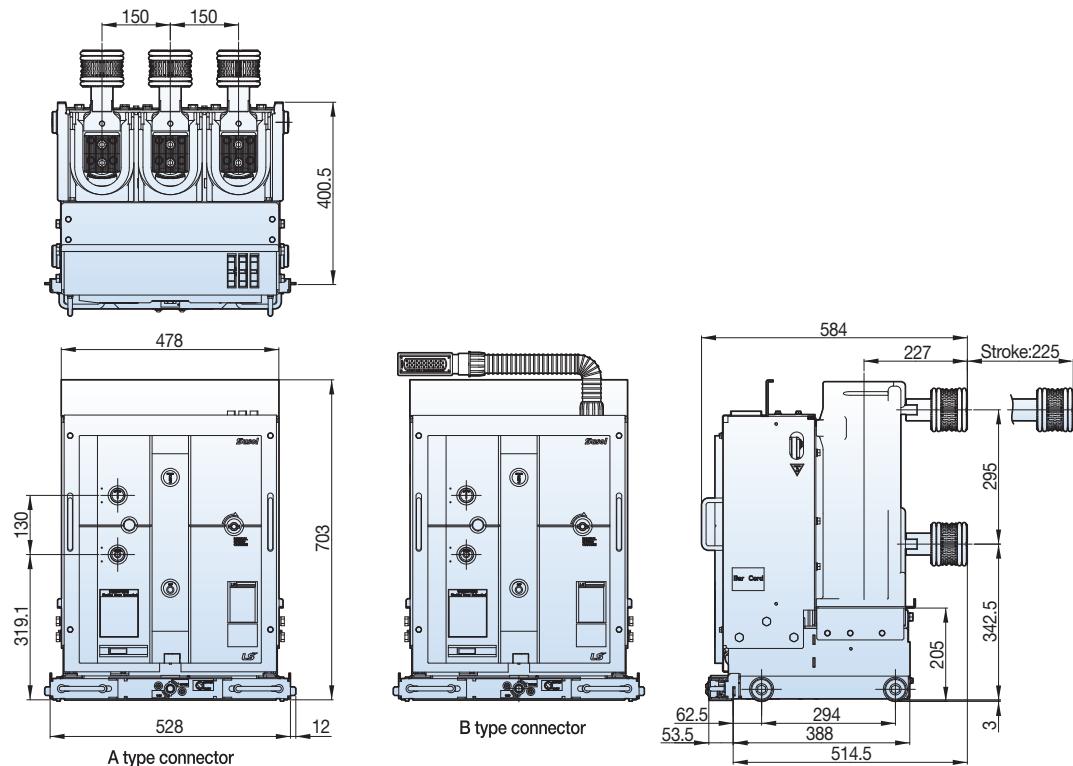

Withdrawable (Fs type cradle, phase distance 150mm)

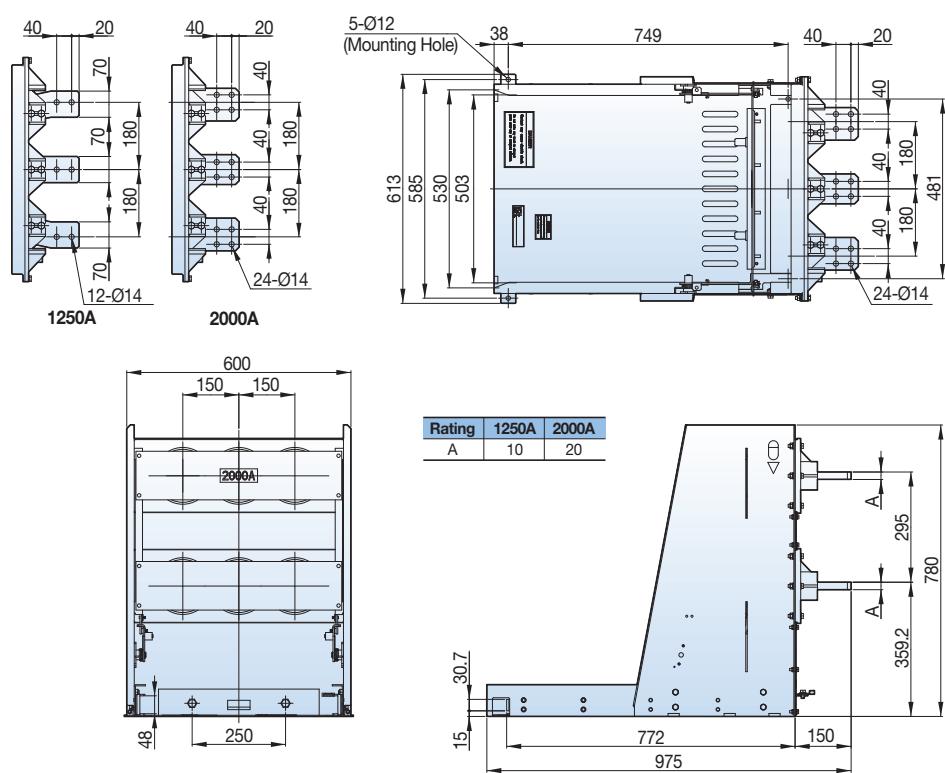

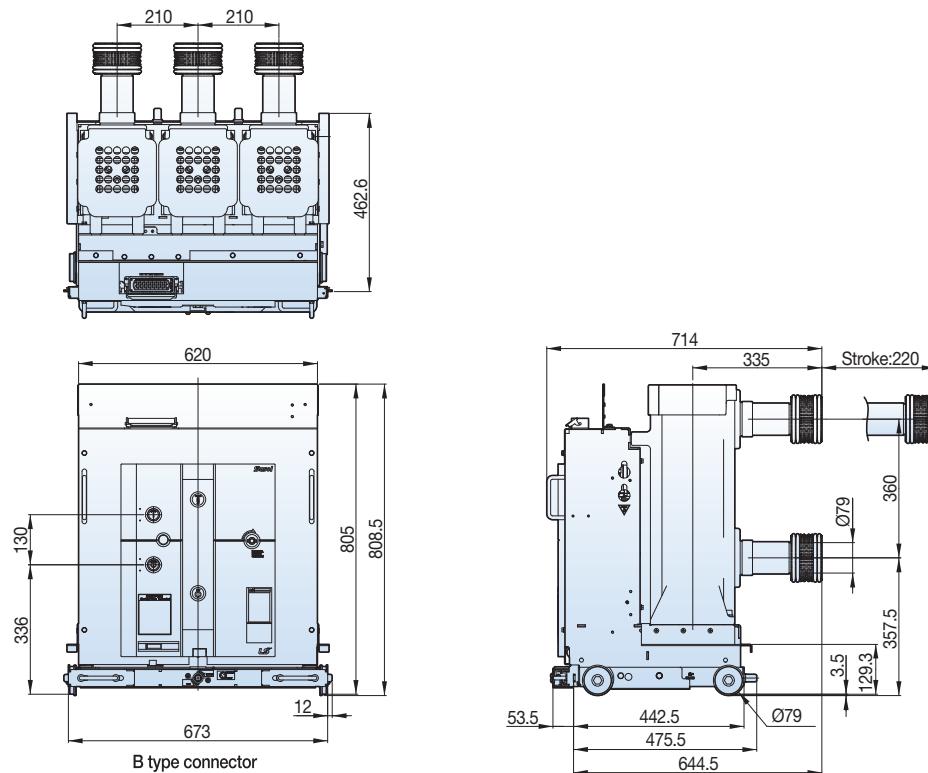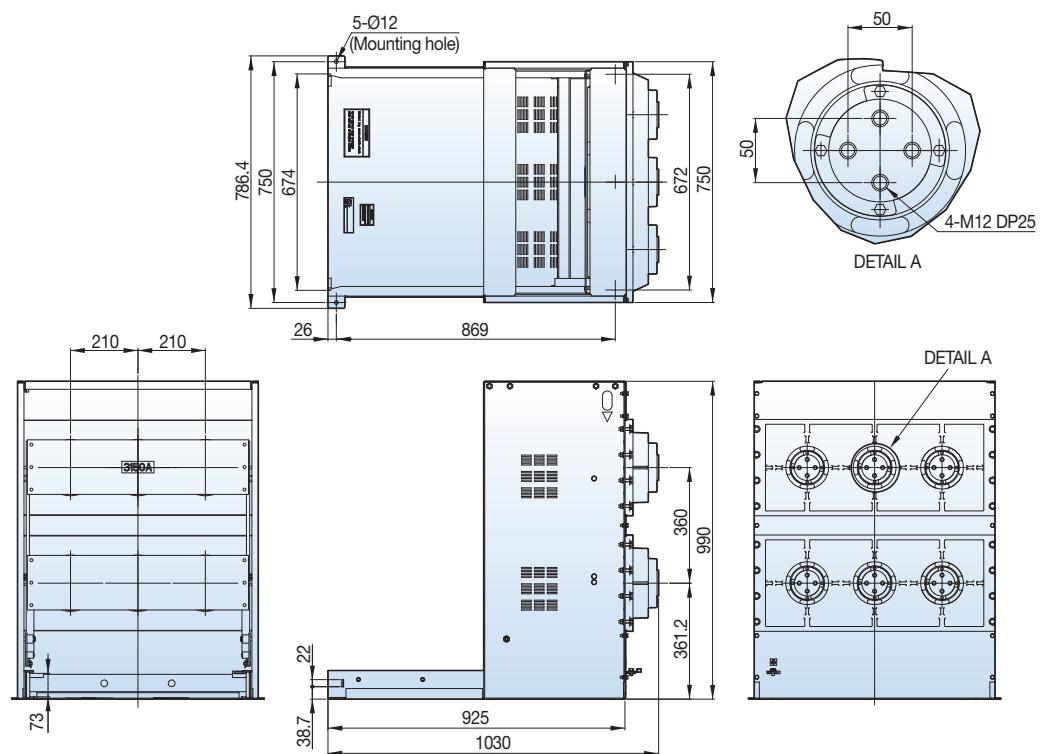
Susol**7.2kV, 31.5/40kA, 3150A****Withdrawable (Fs type unit, phase distance 210mm)****Withdrawable (Fs type cradle, phase distance 210mm)**

Dimensions -VH type


Susol



7.2/12kV, 40kA, 1250/2000A

Withdrawable (Gs type unit, phase distance 150mm)

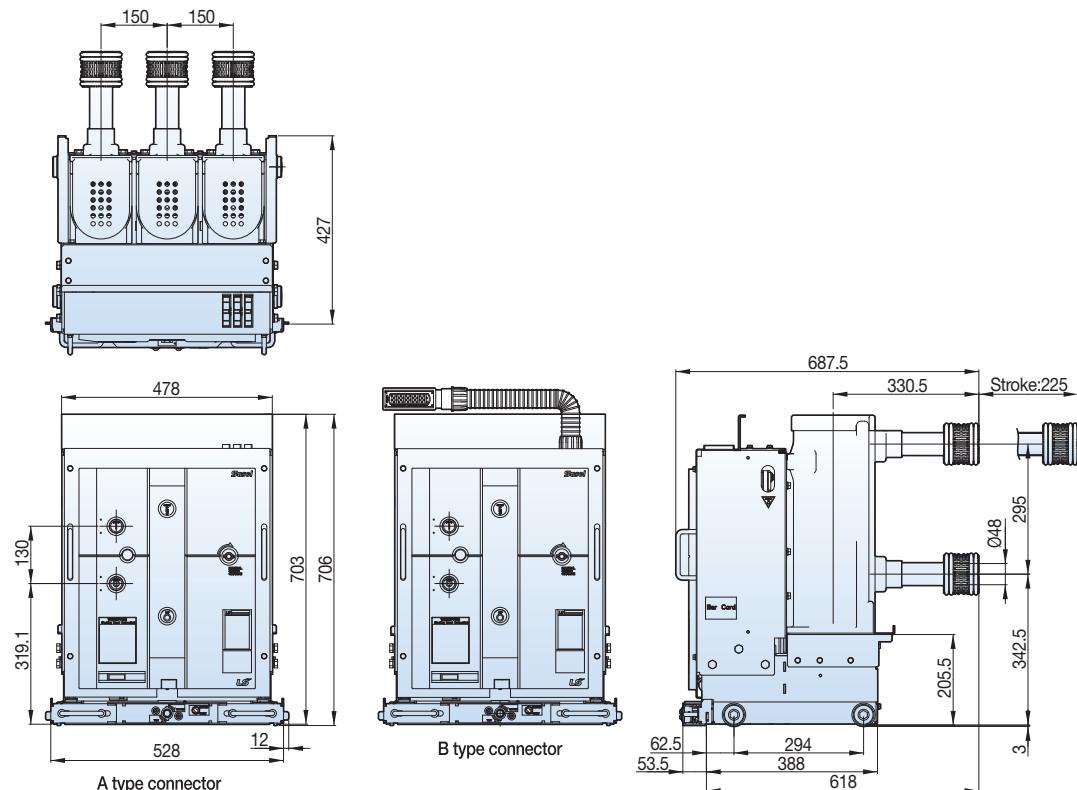

Withdrawable (Gs type cradle, phase distance 150mm)

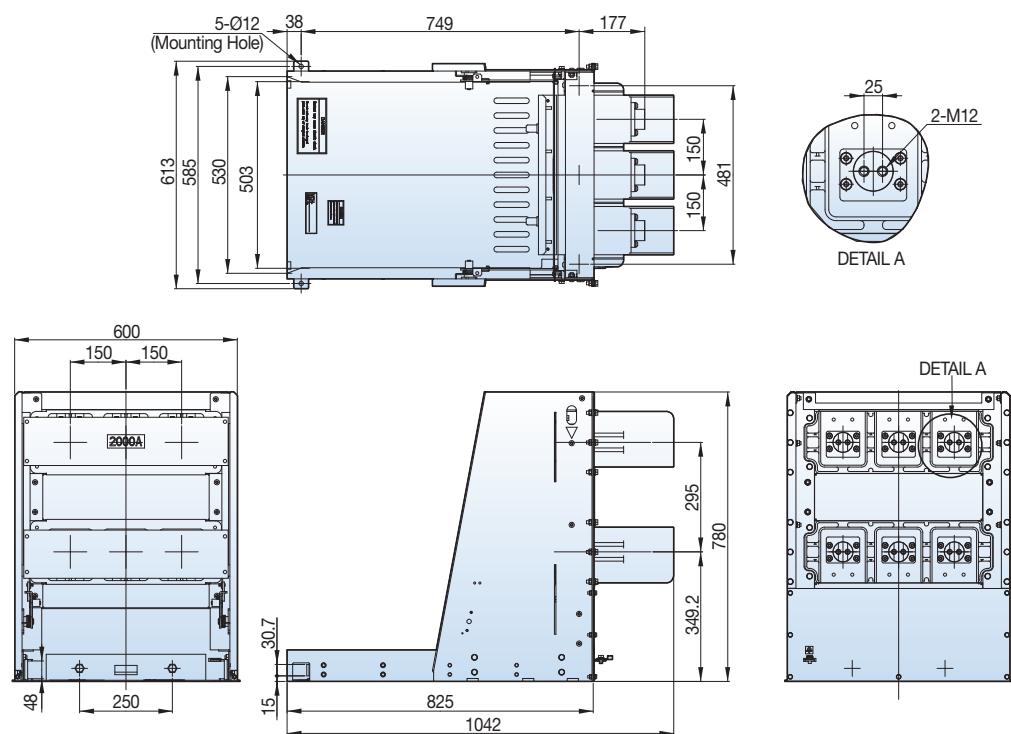

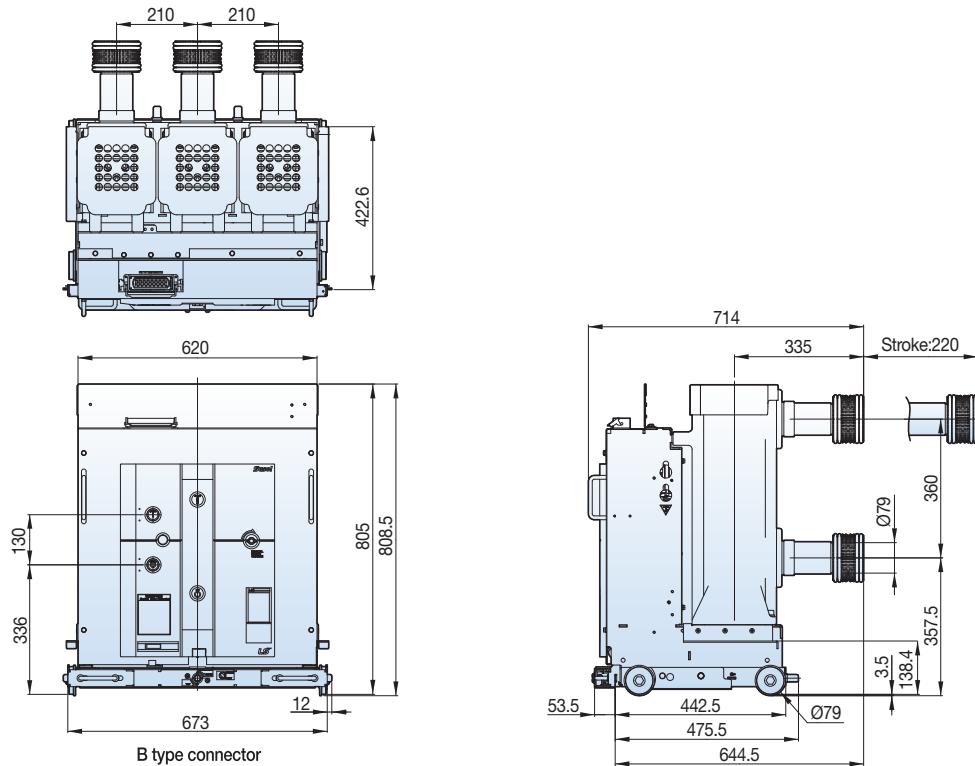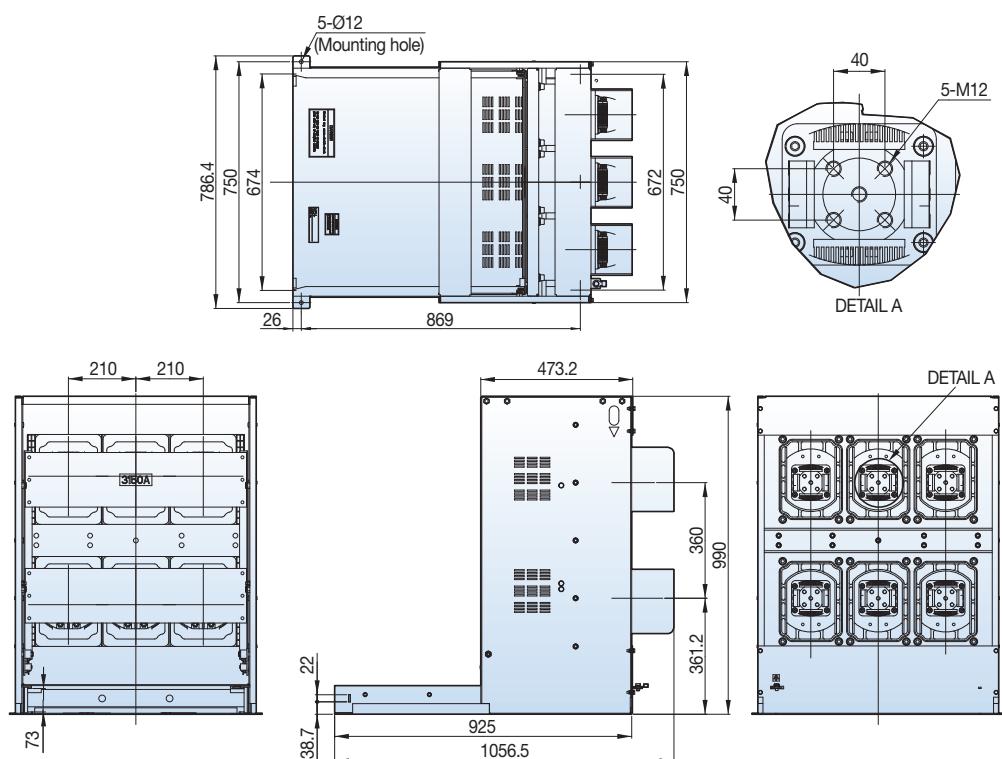
Susol**7.2/12kV, 31.5/40kA, 3150A****Withdrawable (Gs type unit, phase distance 210mm)****Withdrawable (Gs type cradle, phase distance 210mm)**

Dimensions -VH type


Susol



7.2/12kV, 40kA, 1250/2000A

Withdrawable (K type unit, phase distance 150mm, G / T (T) compatible)

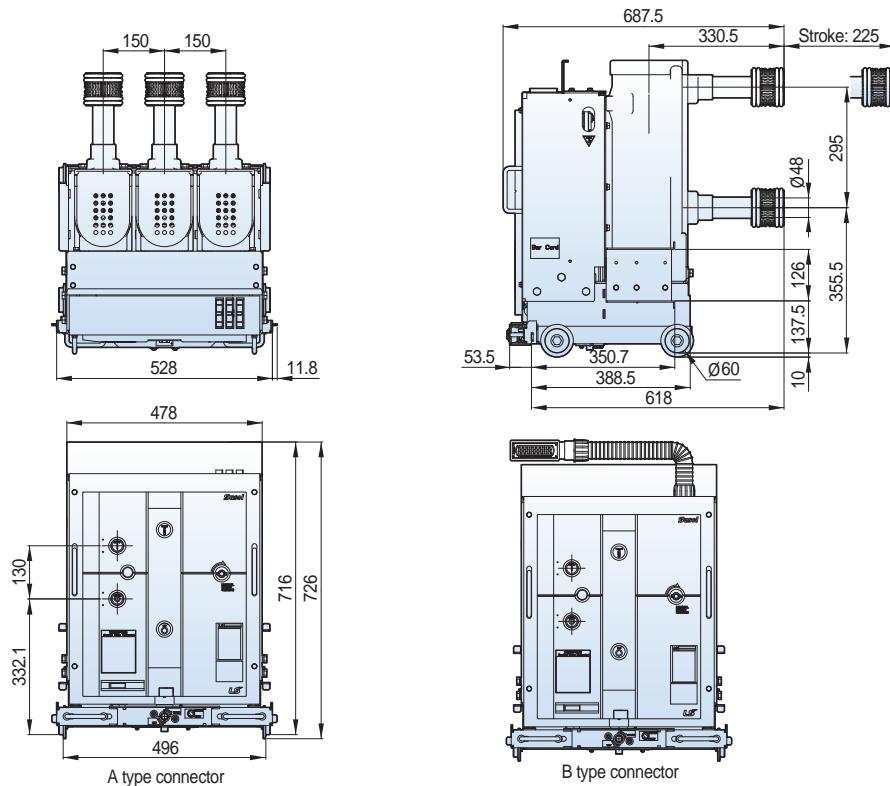

Withdrawable (K type unit, phase distance 150mm, G / T (T2) compatible)

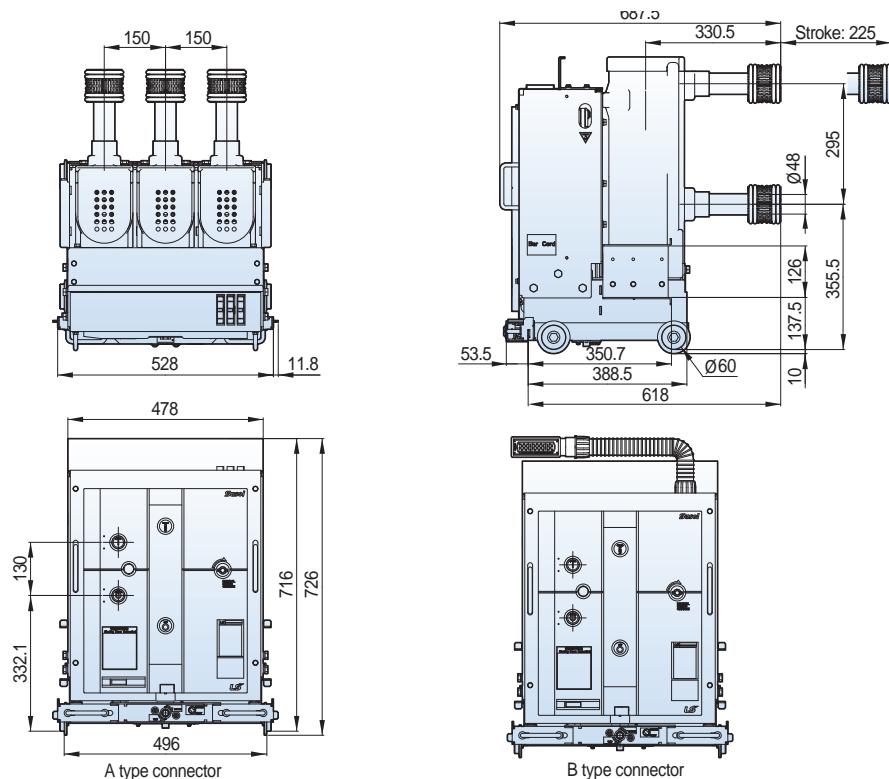

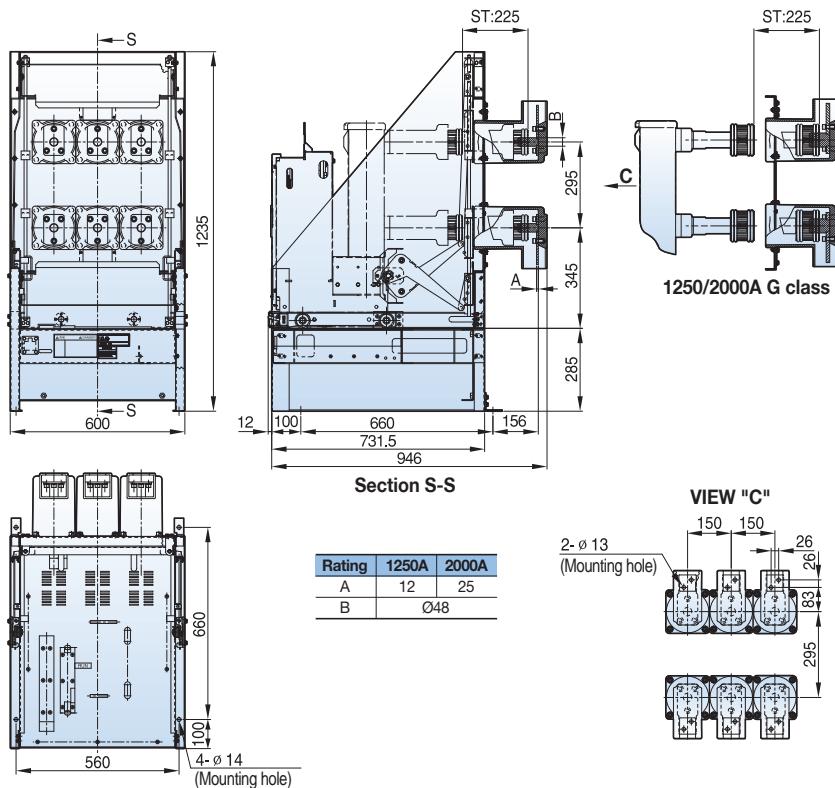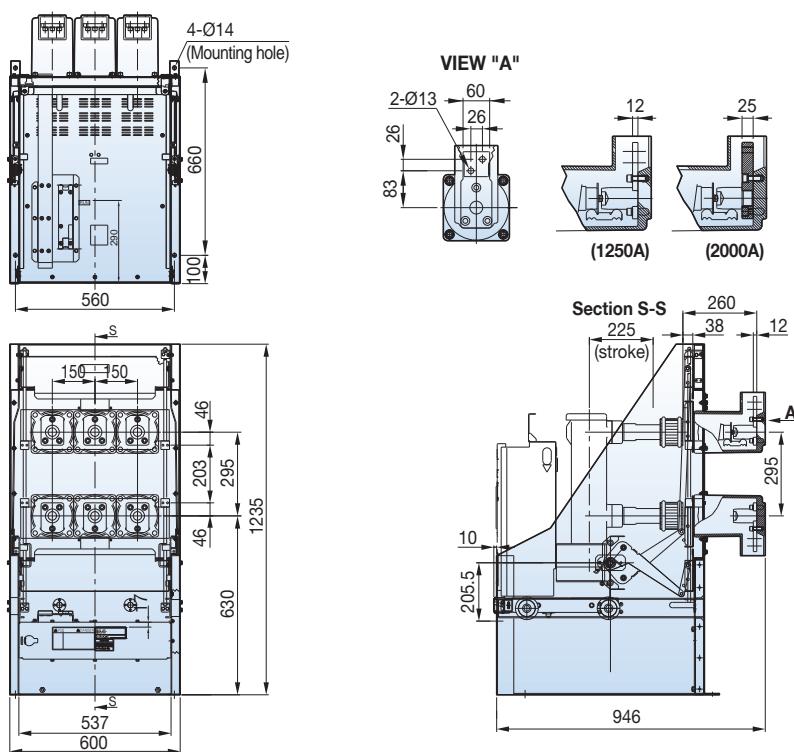
Susol**7.2/12kV, 40kA, 1250/2000A****Withdrawable (K type cradle, phase distance 150mm)****Withdrawable (MCSG cradle T2 type, phase distance 150mm)**

Dimensions -VH type


Susol

7.2/12/17.5kV, 40kA, 1250/2000A

Withdrawable (K type unit, phase distance 210mm, G / T (T2) compatible)

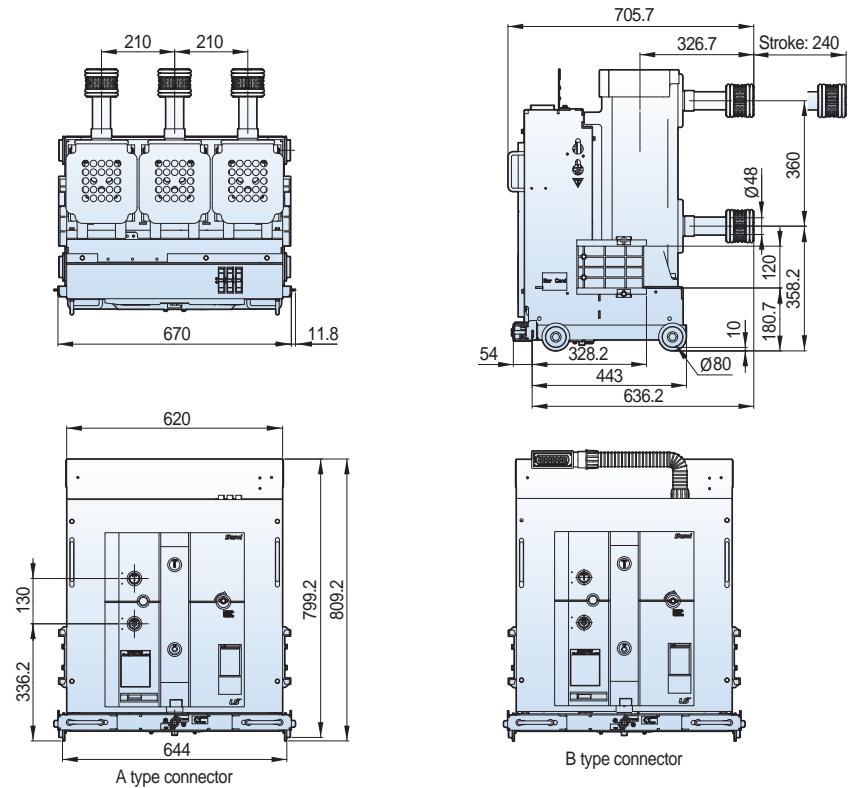


Withdrawable (MCSG cradle T2 type, phase distance 210mm)

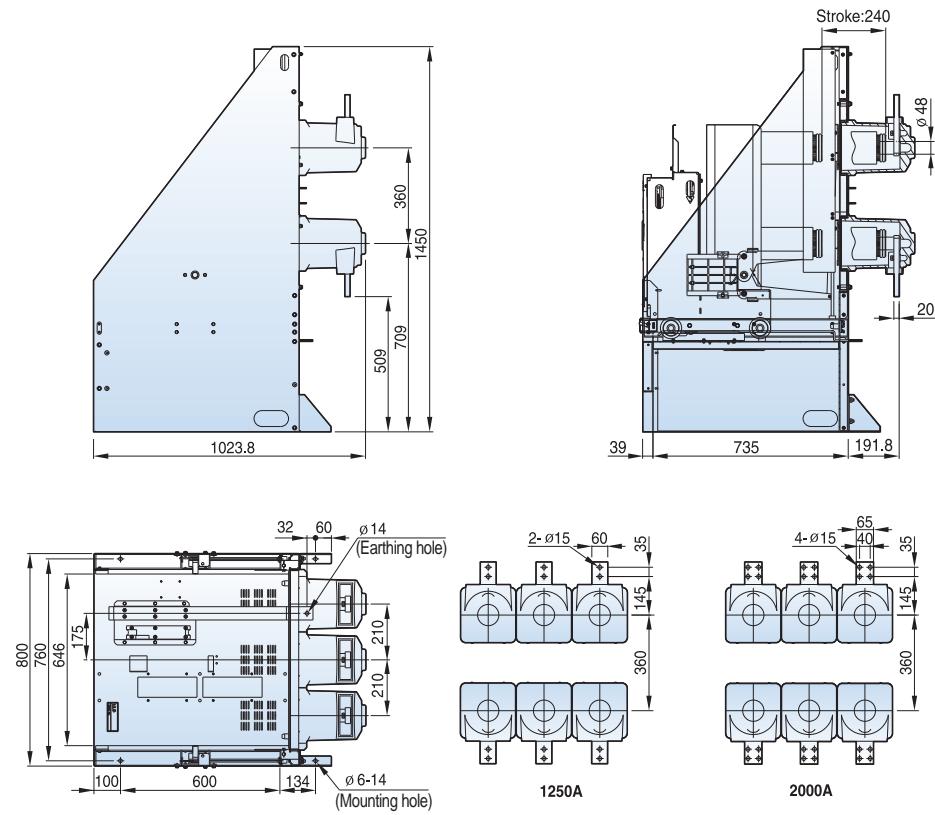


Susol

7.2/12kV, 31.5/40kA, 3150A

Withdrawable (K type unit, phase distance 210mm, G / T (T2) compatible)

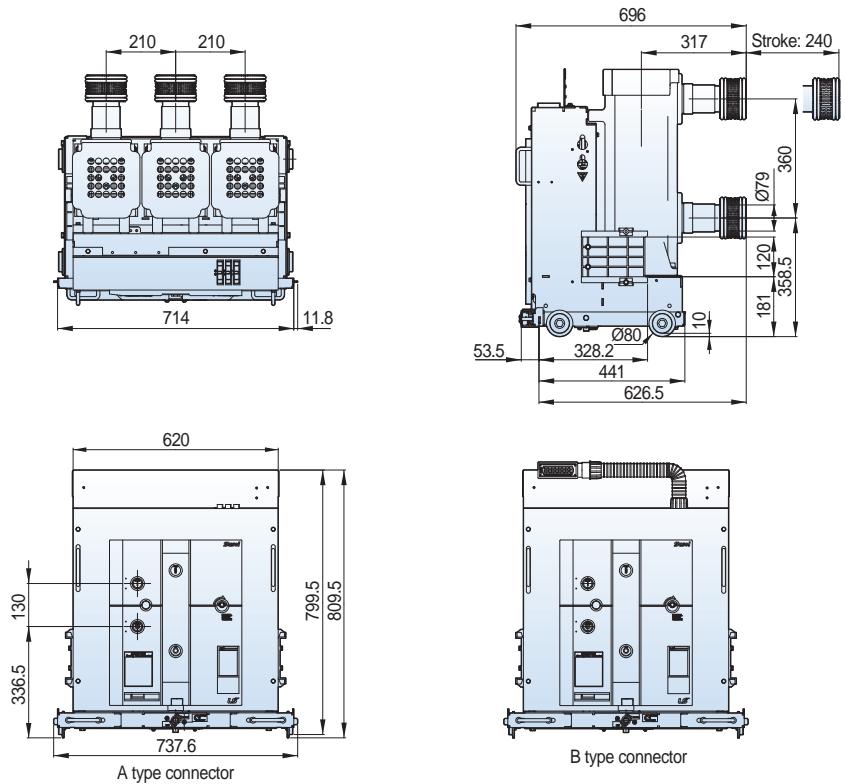

Withdrawable (MCSG cradle T2 type, phase distance 210mm)

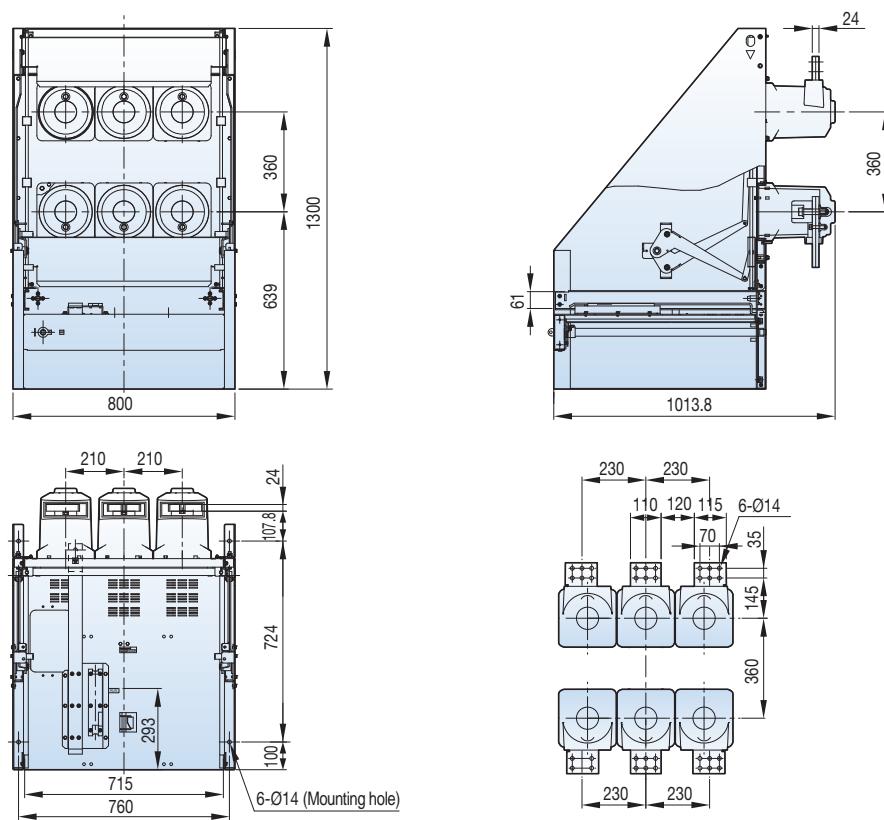


Dimensions -VH type


Susol

17.5kV, 40kA, 3150A

Withdrawable (K type unit, phase distance 254mm, G / T (T) compatible)

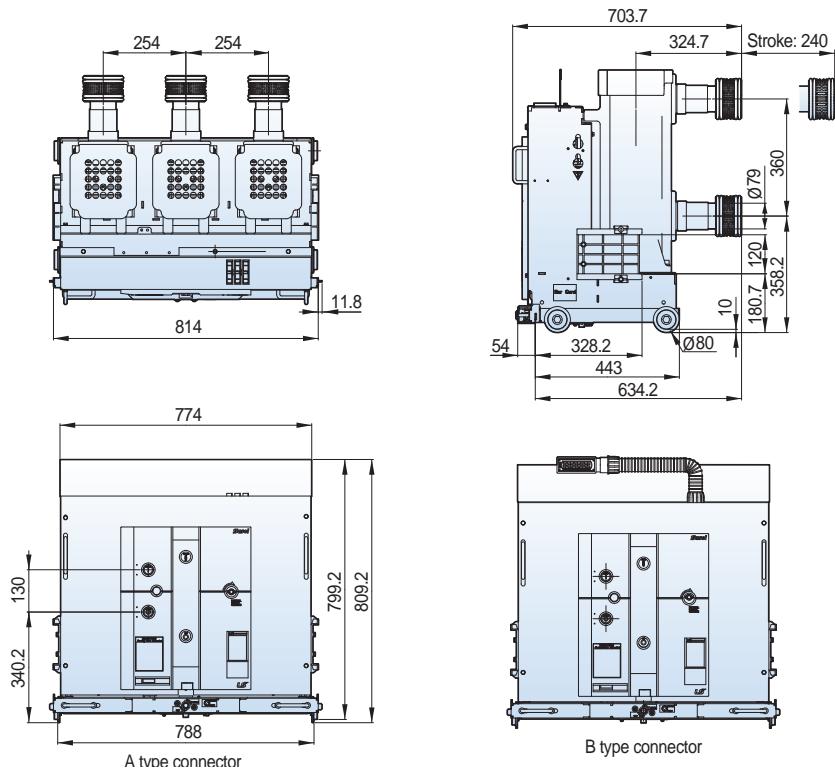


Drawable (MCSG cradle T2 type, phase distance 254mm)

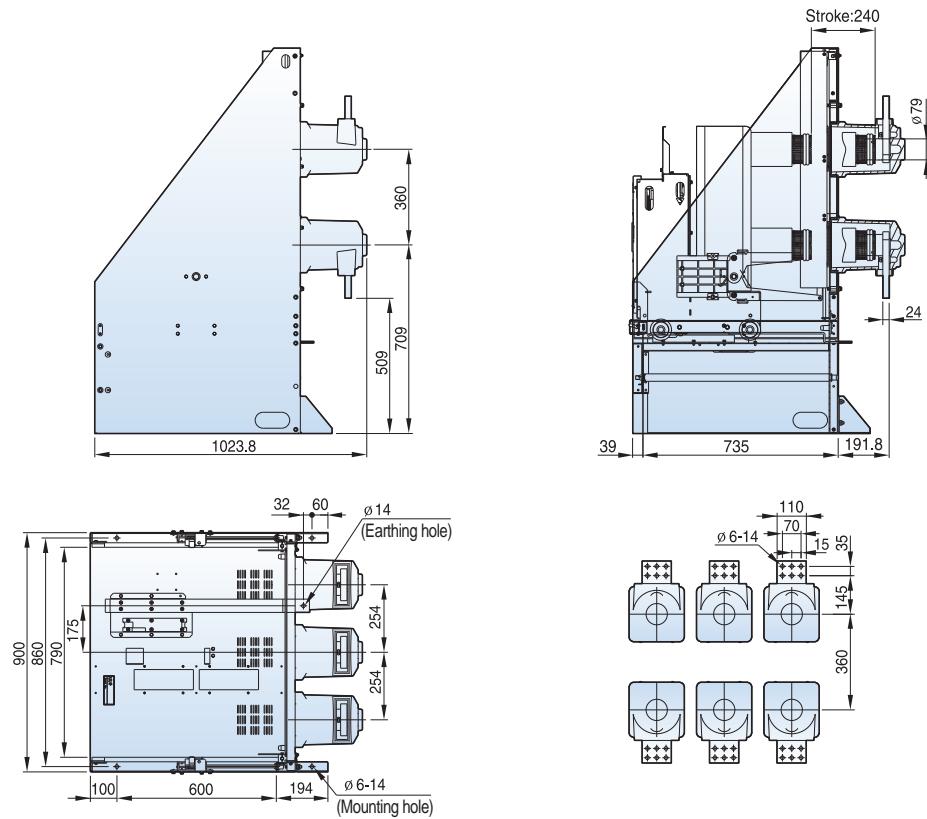

Susol


7.2/12kV, 40kA, 1250A

Withdrawable (H type unit, phase distance 150mm)

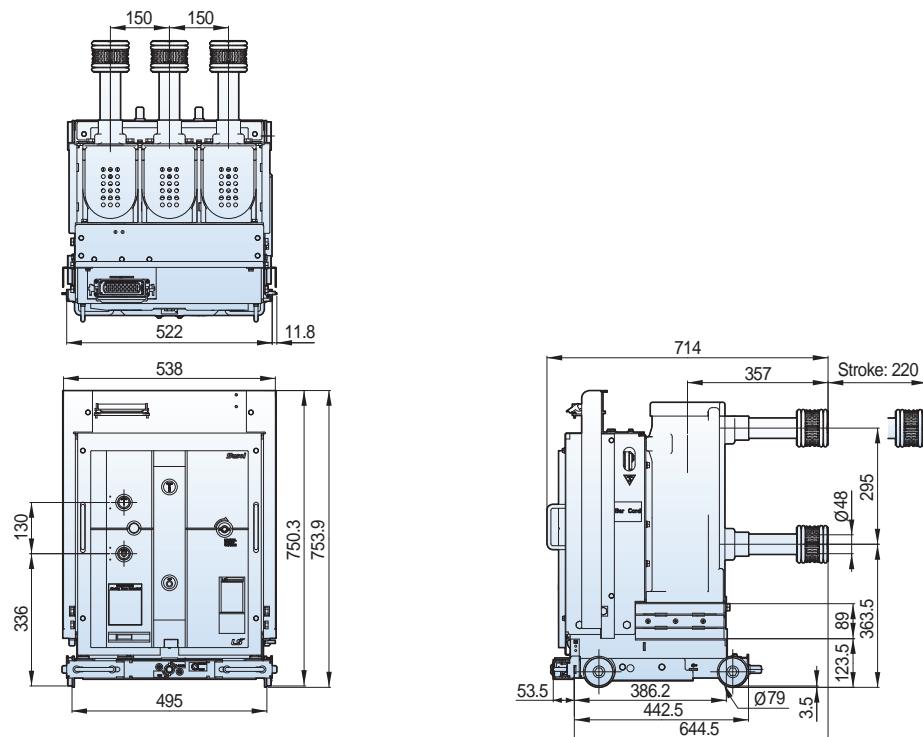

7.2/12kV, 40kA, 2000A

Withdrawable (H type unit, phase distance 150mm)

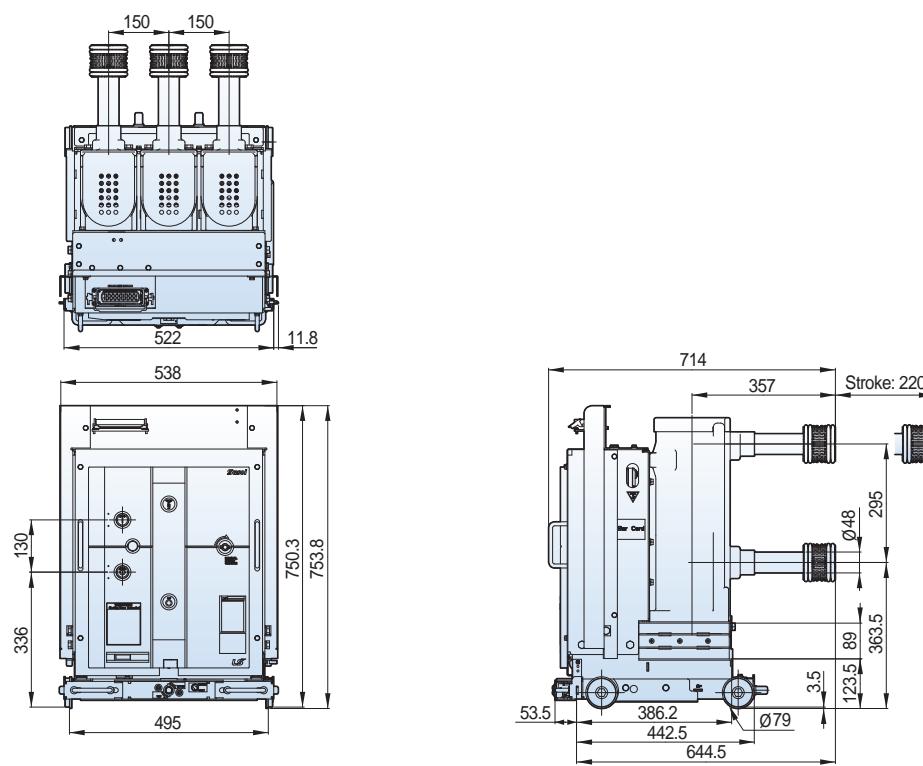


Dimensions -VH type

Susol

7.2/12kV, 40kA, 1250/2000A


Withdrawable (H cradle, phase distance 150mm)

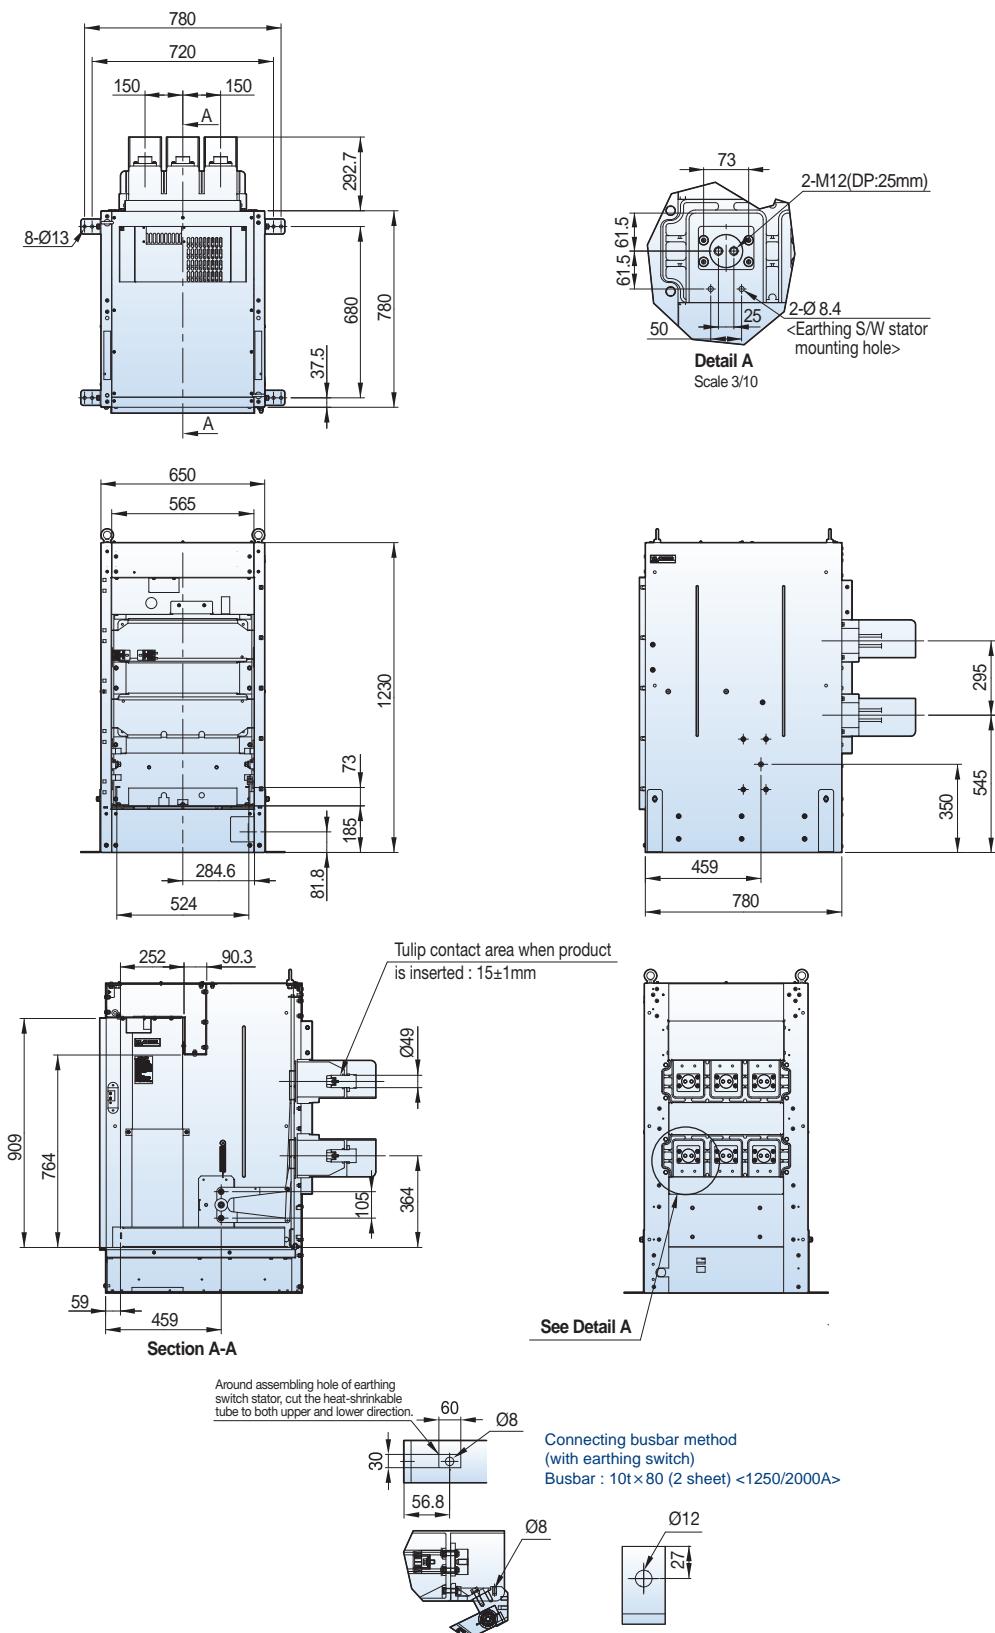

Susol


7.2/12/17.5kV, 40kA, 1250/2000A

Withdrawable (H type unit, phase distance 210mm)

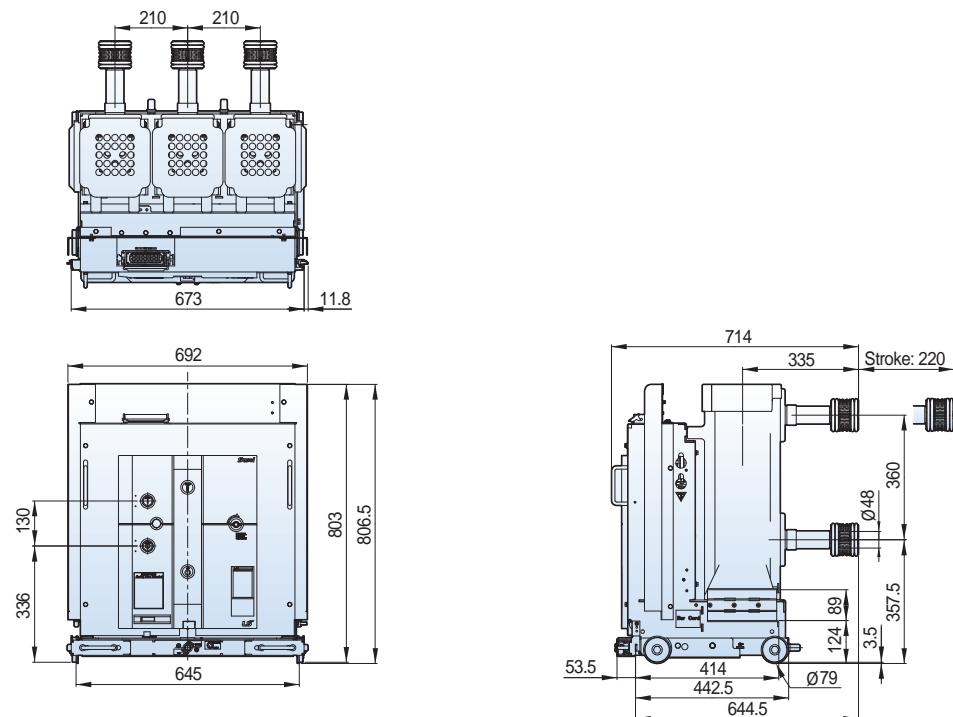

7.2/12/17.5kV, 31.5/40kA, 3150A

Withdrawable (H type unit, phase distance 210mm)

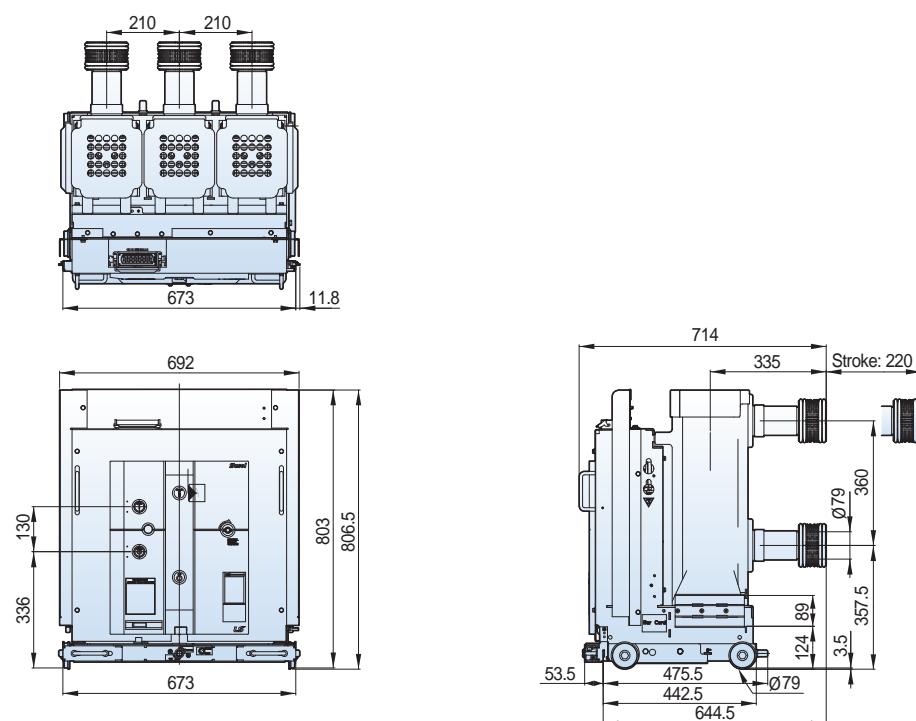


Dimensions -VH type

Susol

7.2/12/17.5kV, 40kA, 1250/2000A


Withdrawable (H cradle, phase distance 210mm)

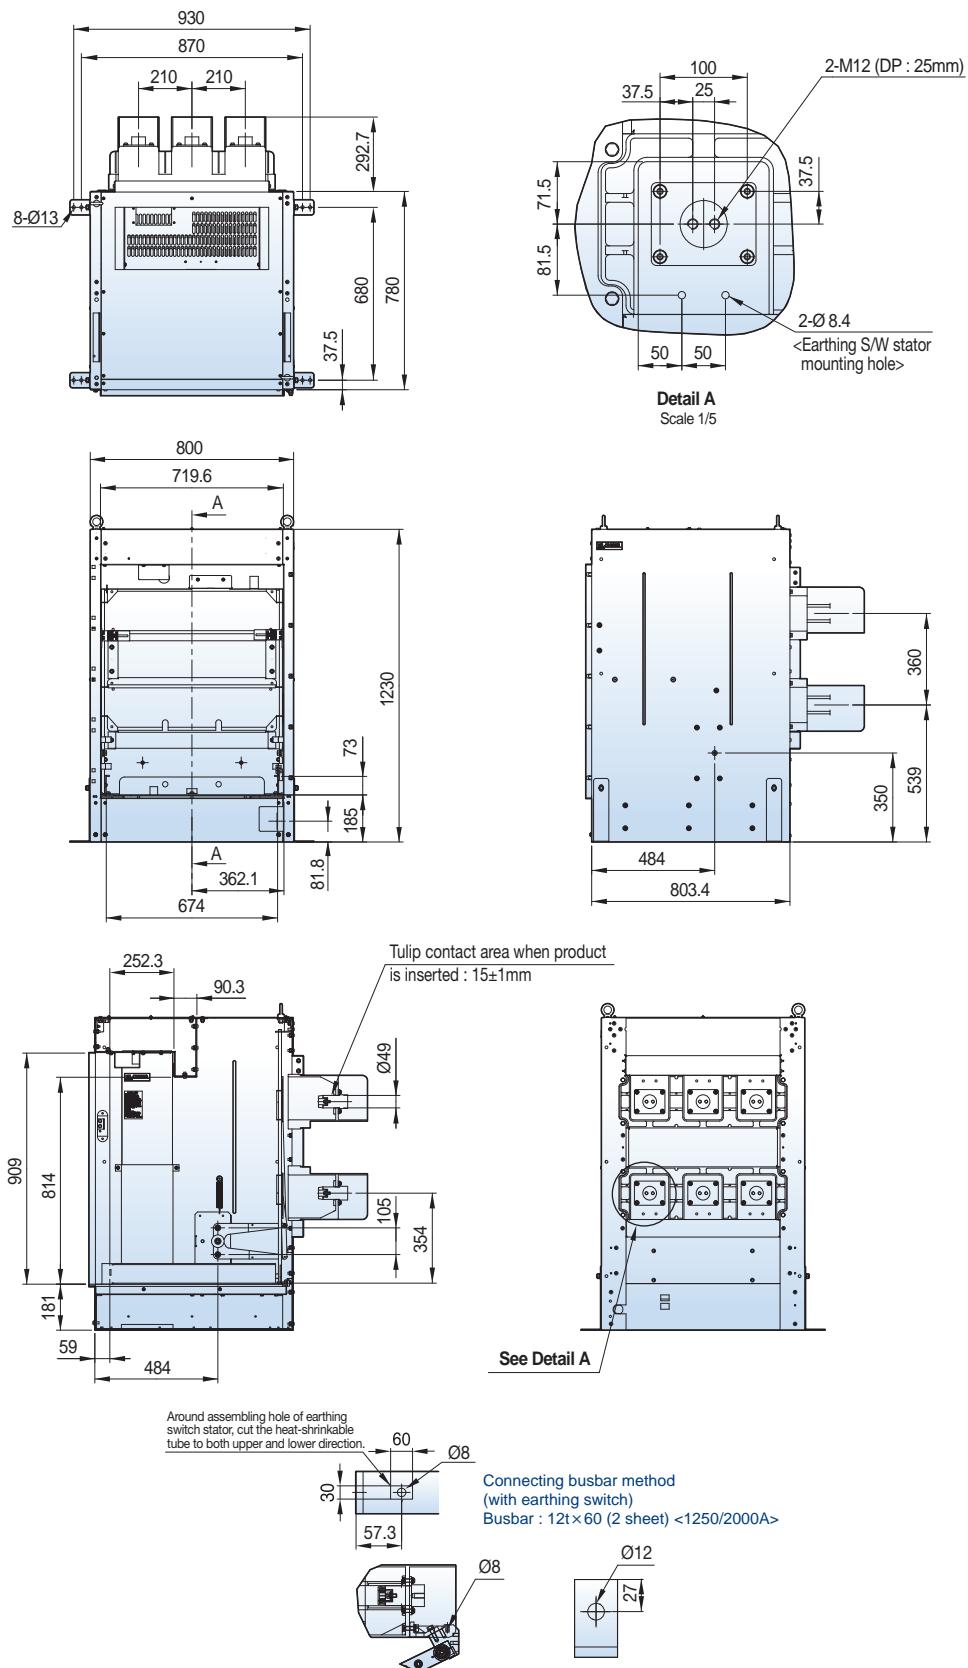

Susol

7.2/12/17.5kV, 31.5/40kA, 3150A

Withdrawable (H cradle, phase distance 210mm)

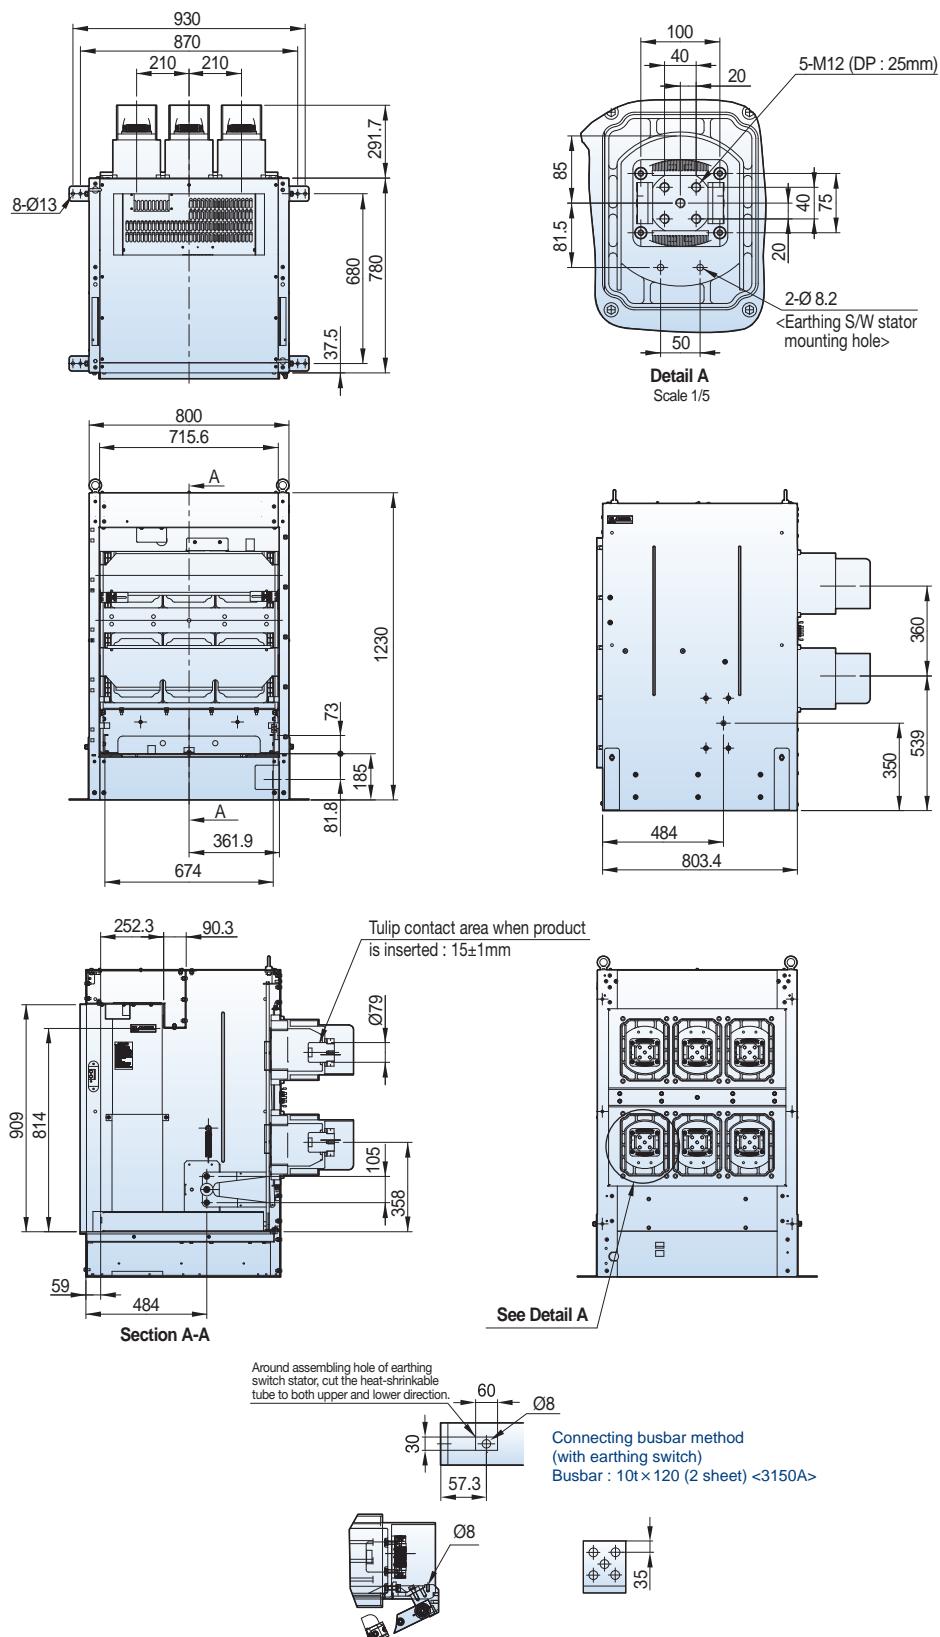



Dimensions -VH type

Susol

17.5kV, 31.5/40kA, 3150A

Withdrawable (H type unit, phase distance 275mm)

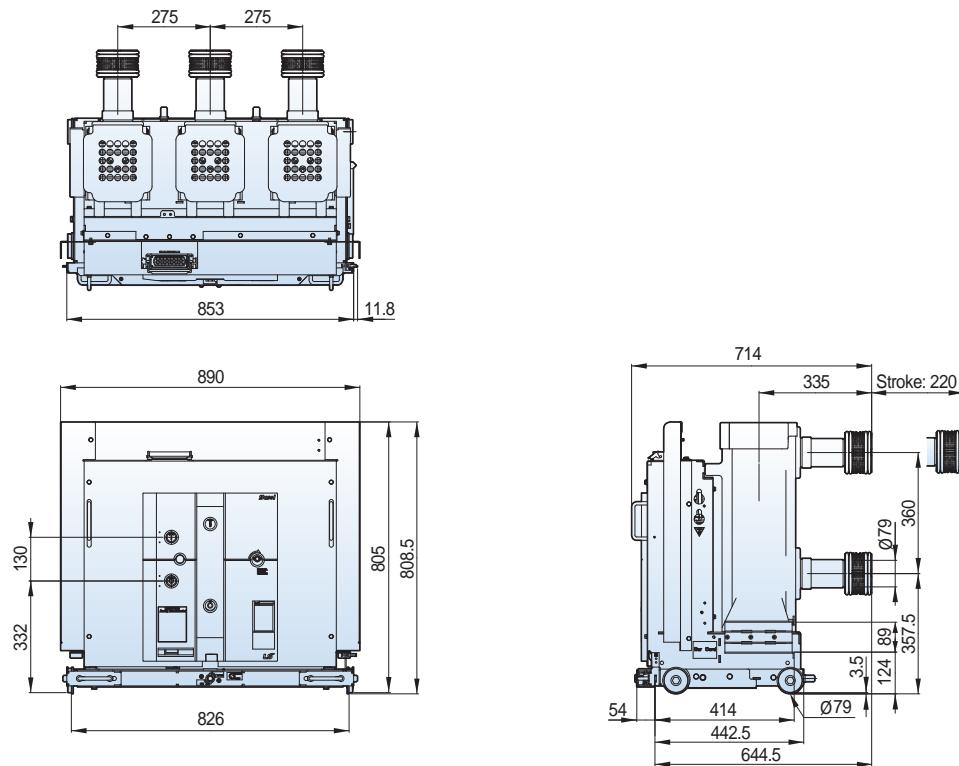

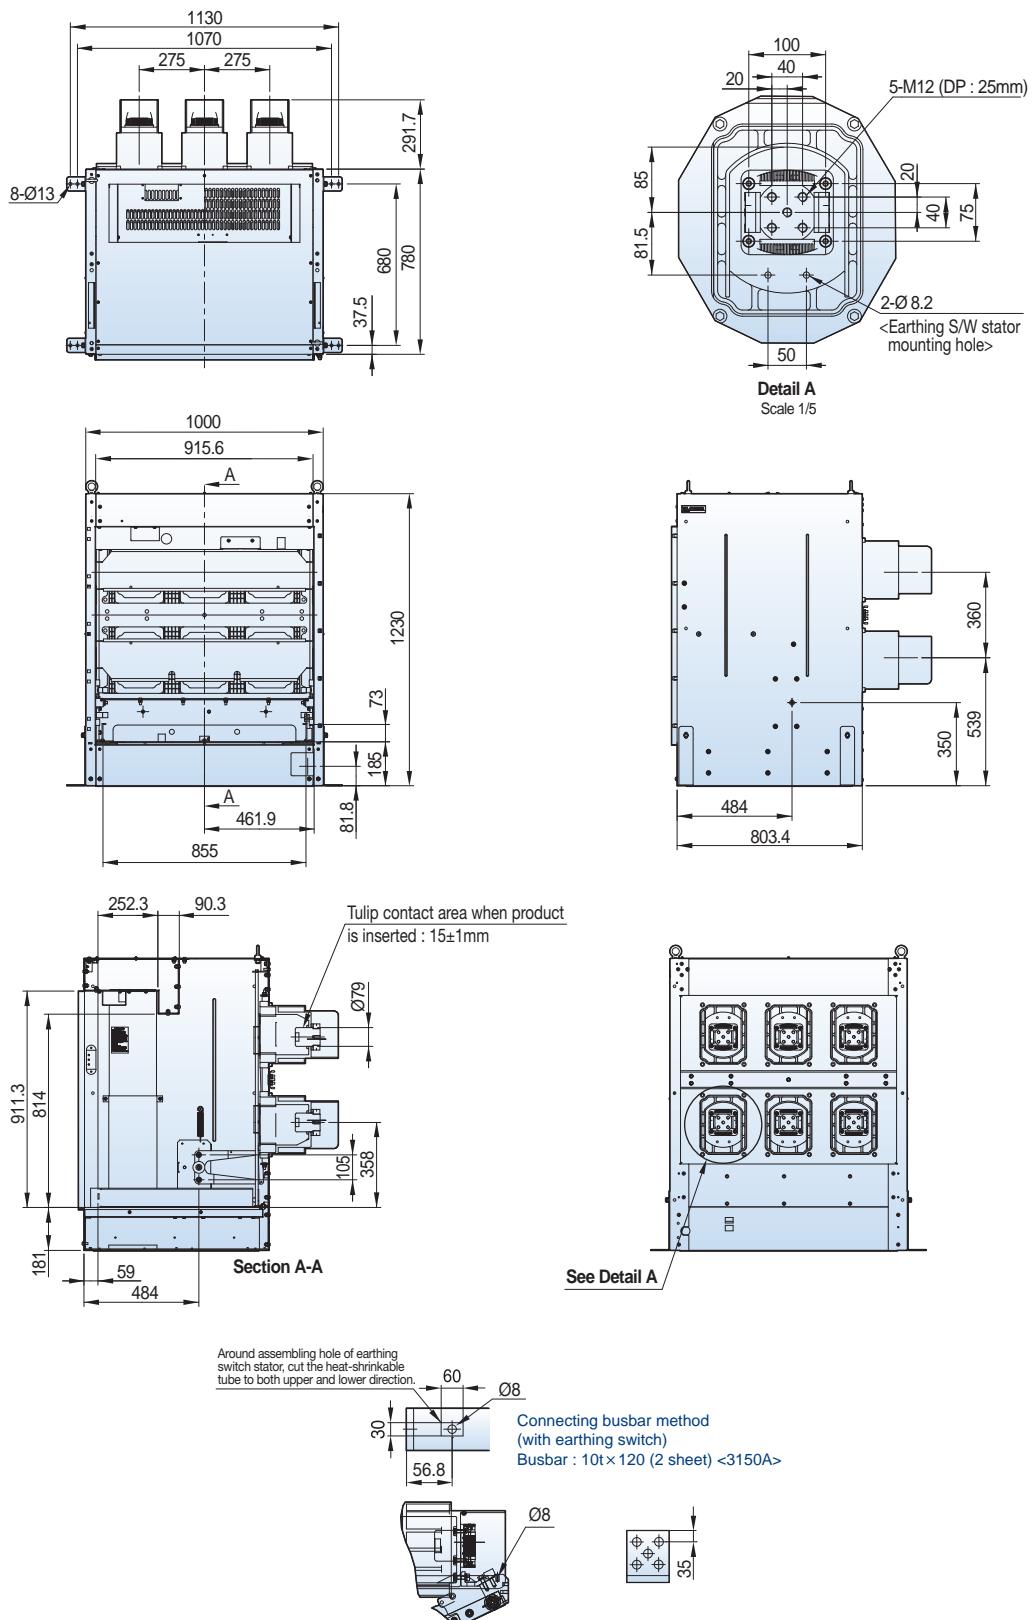
Susol**17.5kV, 31.5/40kA, 3150A****Withdrawable (H cradle, phase distance 275mm)**

Dimensions -VH type


Susol

7.2/12/17.5kV, 50kA, 1250/2000A

Fixed (P type, phase distance 210mm)

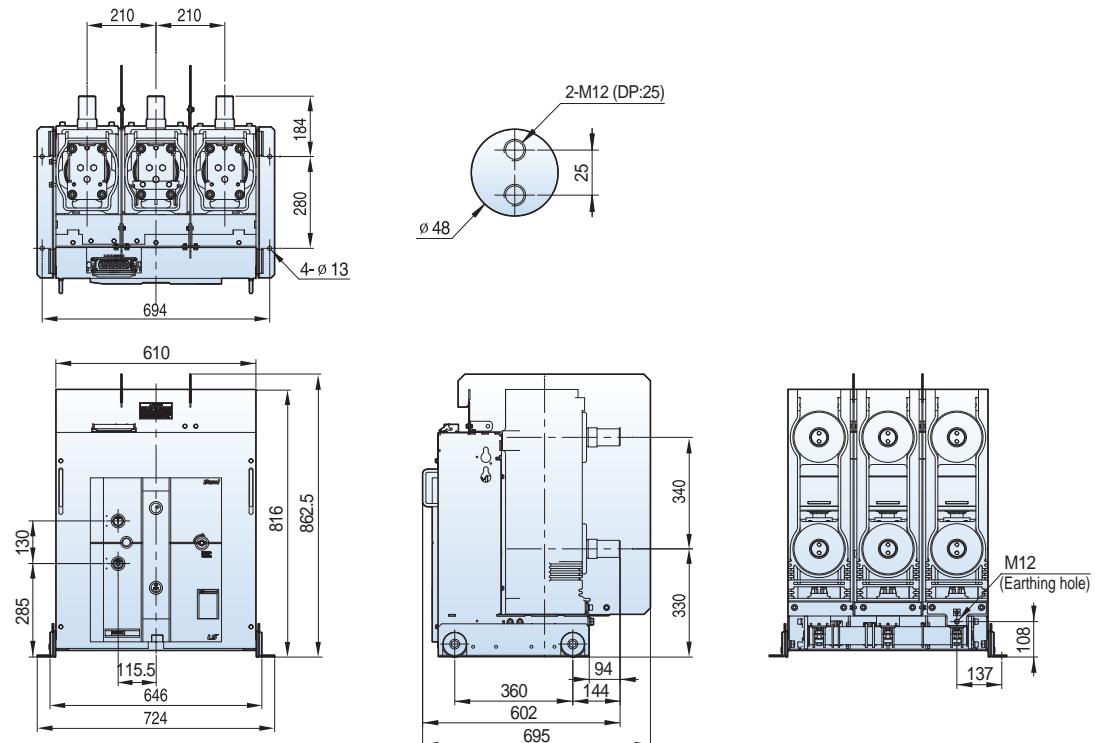


Withdrawable (H type unit, phase distance 210mm)

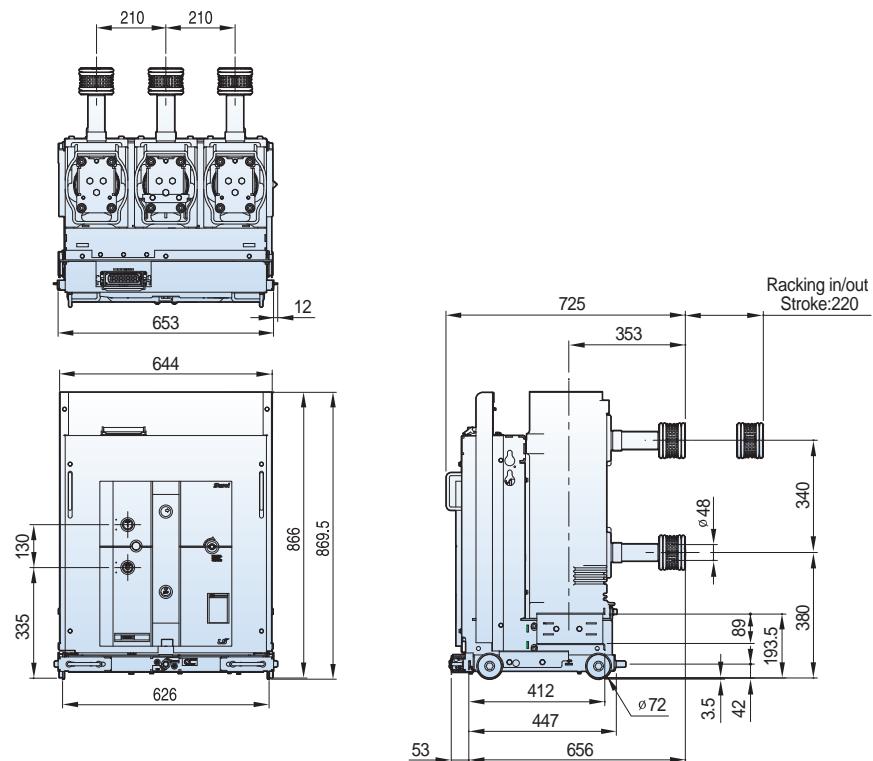

Susol

7.2/12/17.5kV, 50kA, 1250/2000A

Withdrawable (H cradle, phase distance 210mm)

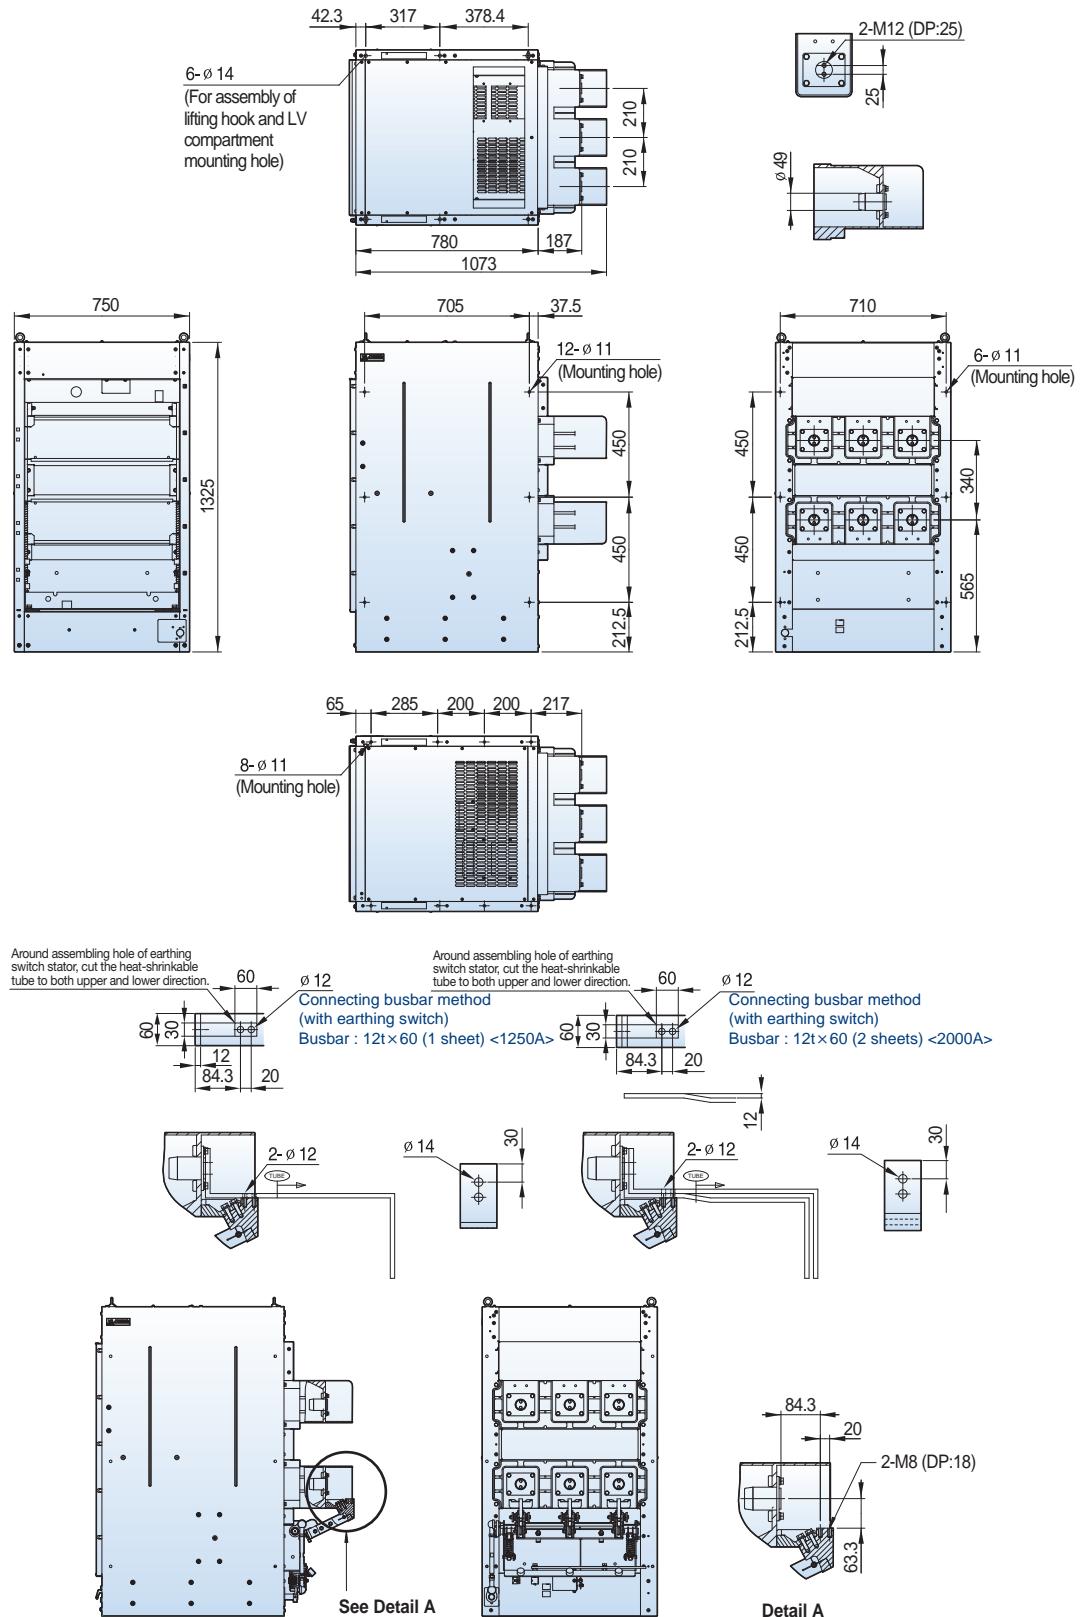


Dimensions -VH type


Susol


7.2/12/17.5kV, 50kA, 2500/3150A

Fixed (P type, phase distance 275mm)

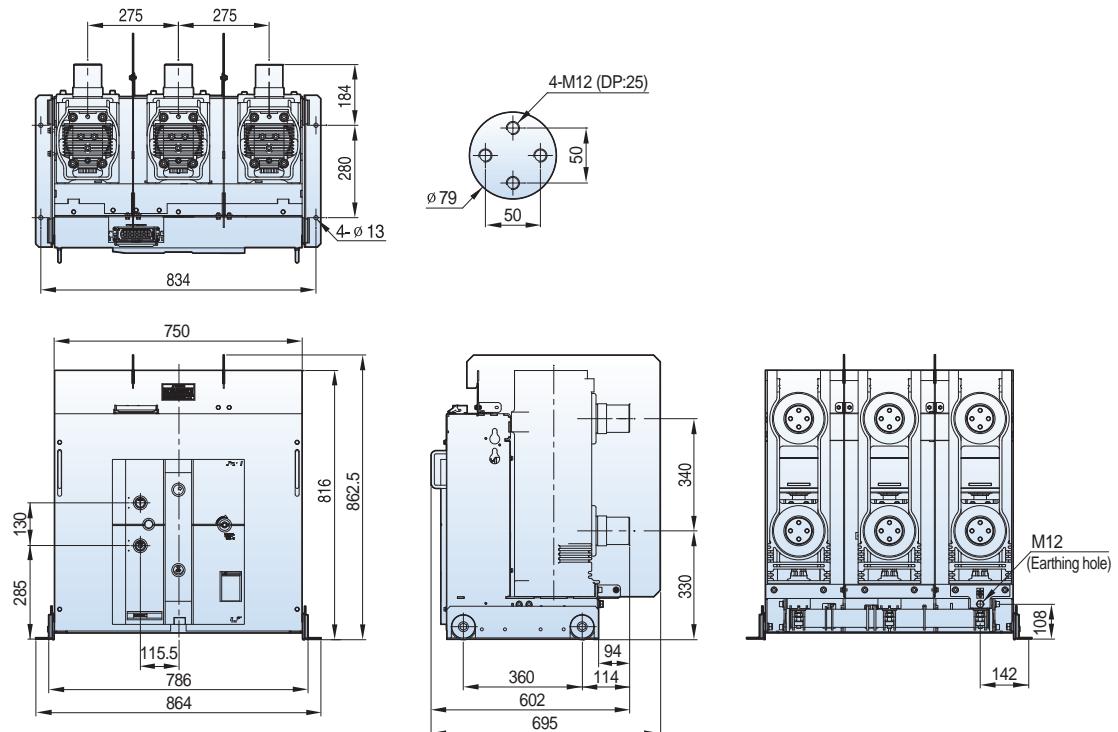

Withdrawable (H type unit, phase distance 275mm)

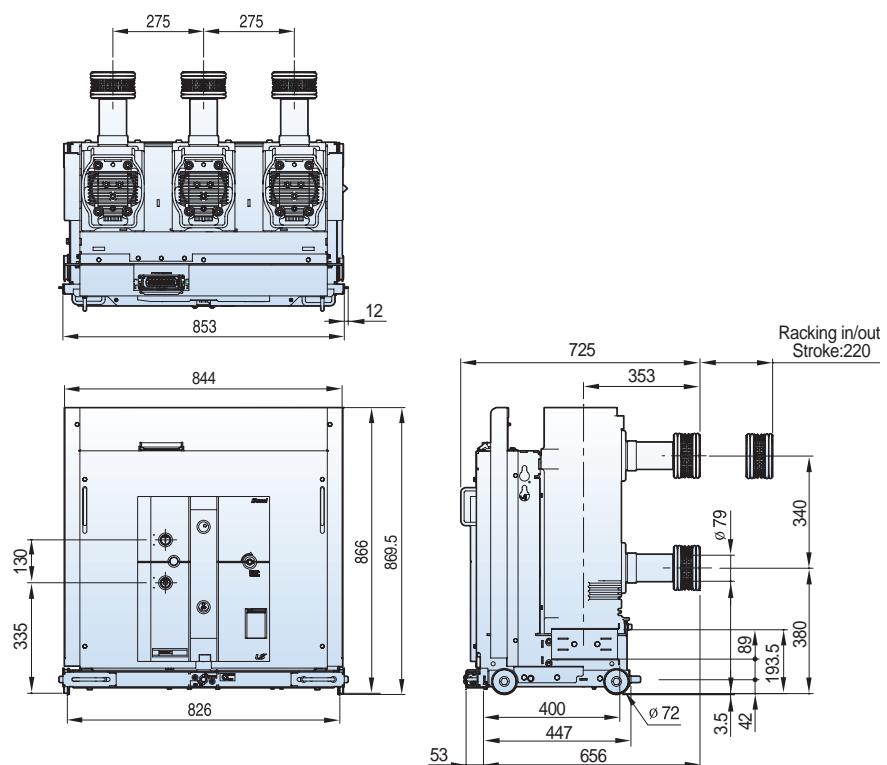

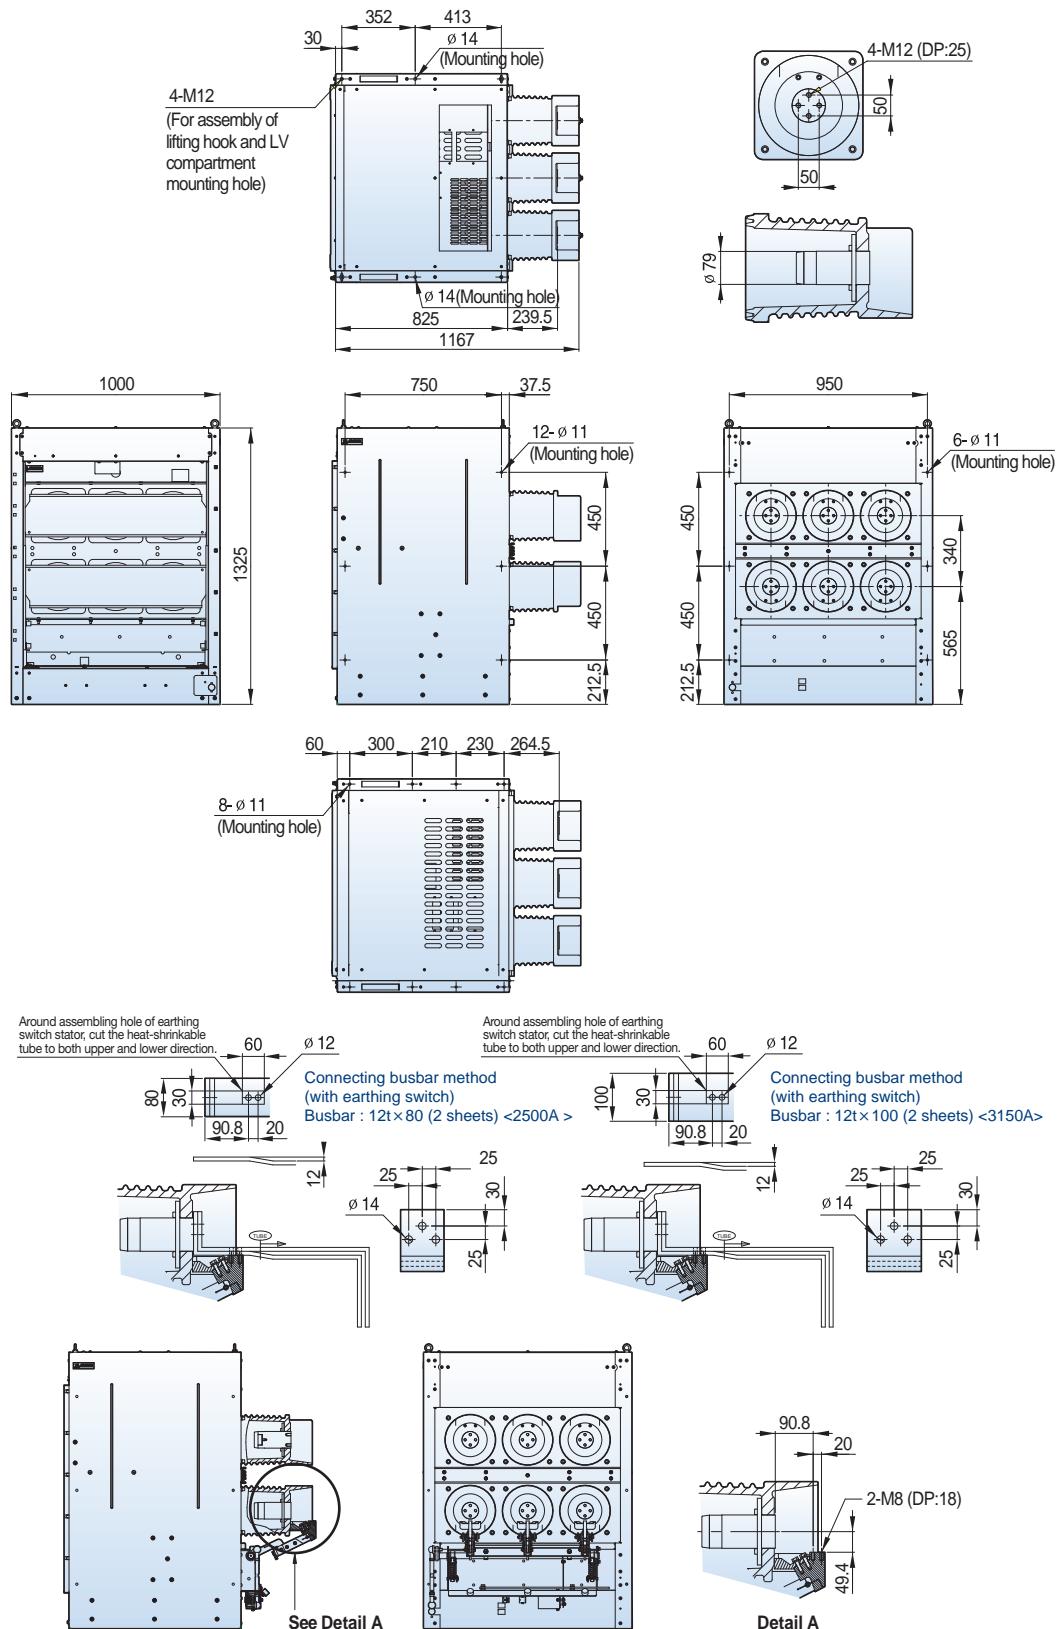
Susol**7.2/12/17.5kV, 50kA, 2500/3150A****Withdrawable (H cradle, phase distance 275mm)**

Dimensions -VH type


Susol








7.2/12/17.5kV, 40/50kA, 4000A

Fixed (P type, phase distance 275mm)

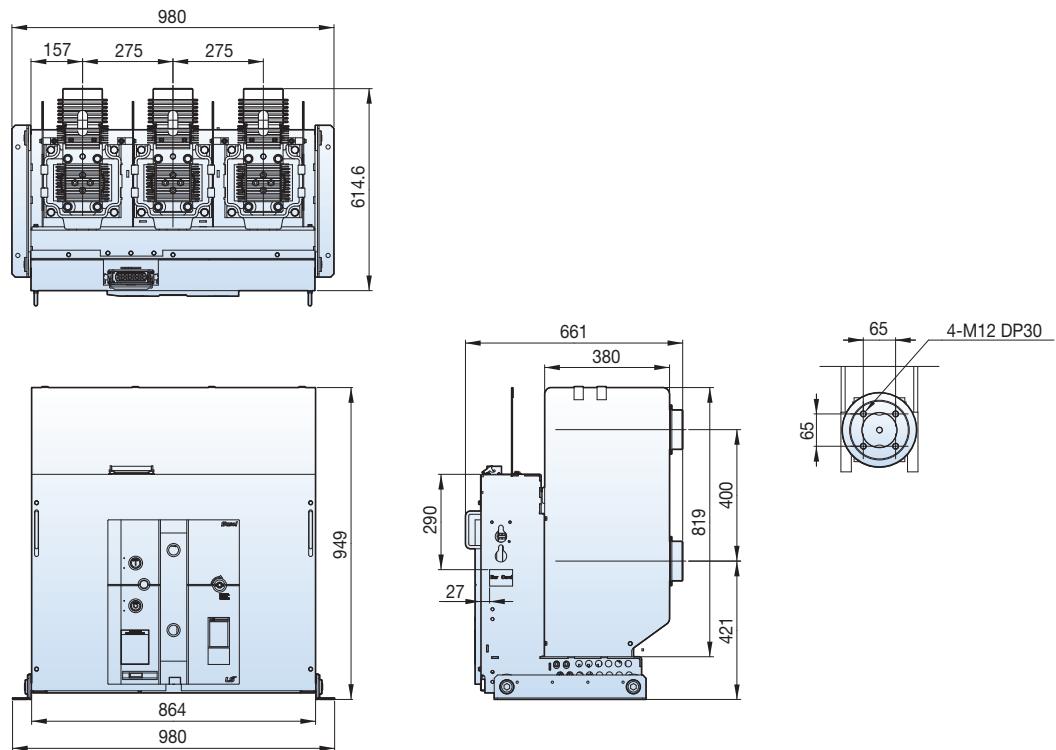

Withdrawable (H type unit, phase distance 275mm)

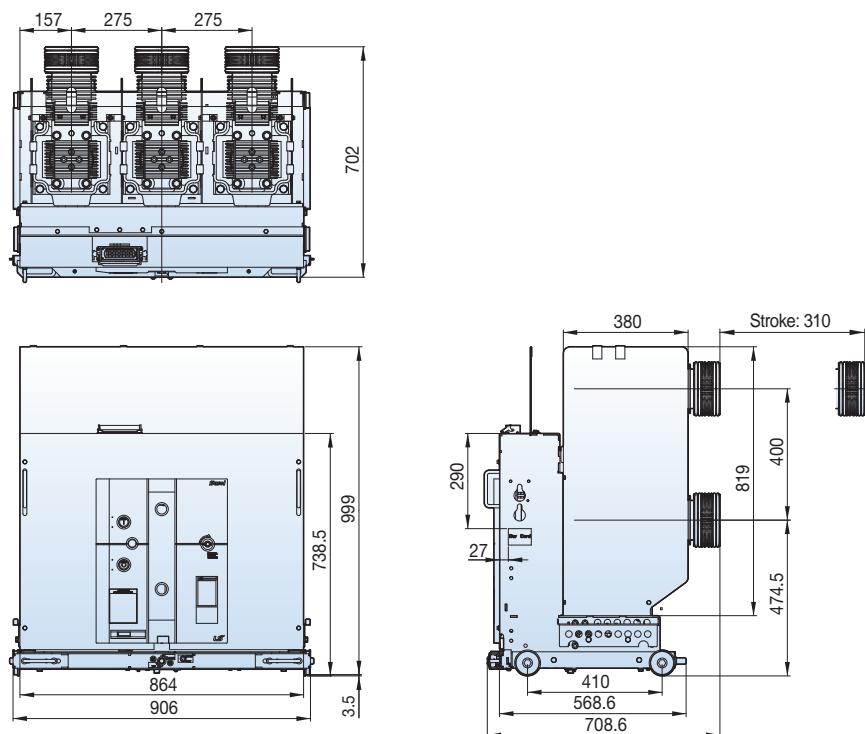

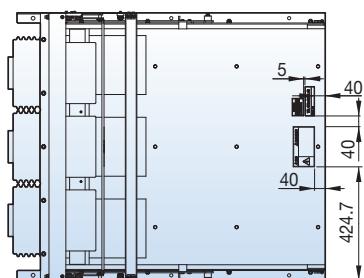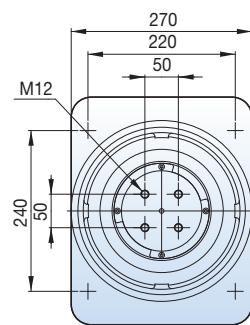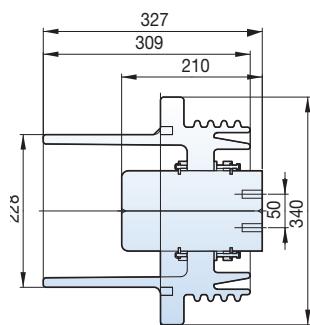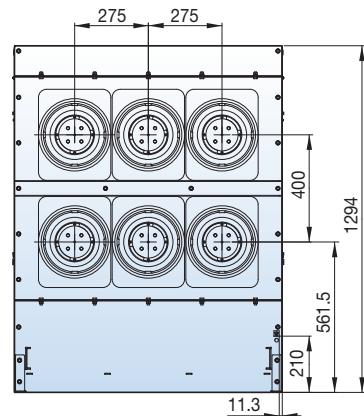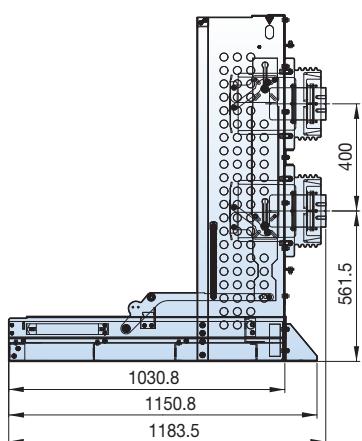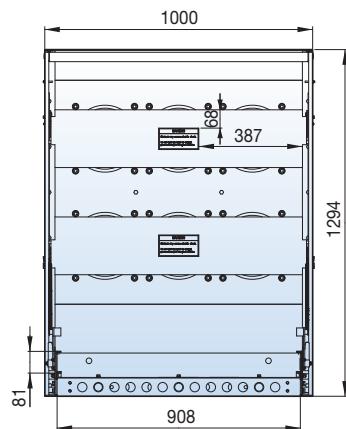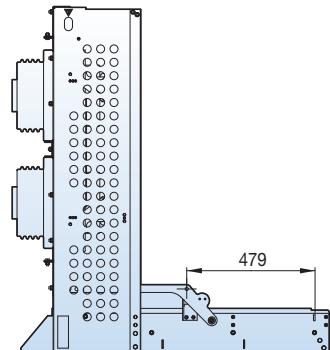Susol**7.2/12/17.5kV, 40/50kA, 4000A****Withdrawable (Ha type cradle, phase distance 275mm, Normal Type)****Section A-A**


Dimensions -VH type


Susol

7.2/12/17.5kV, 40/50kA, 4000A

Withdrawable (Ha type cradle, phase distance 275mm, with Earthing Switch)

The same applies to MOC or TOC

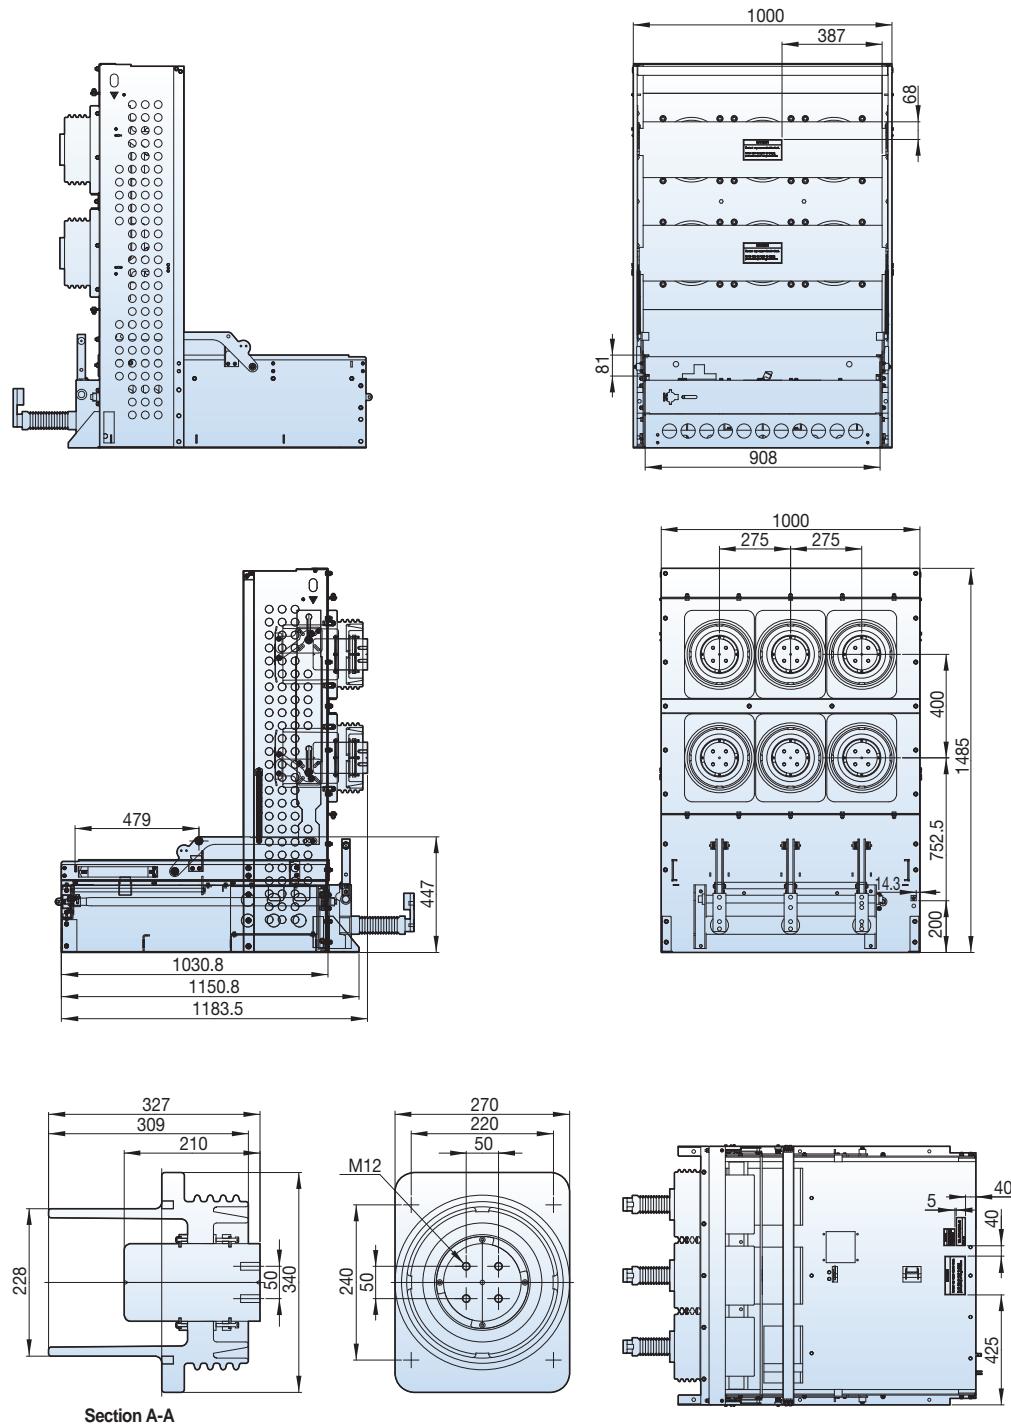



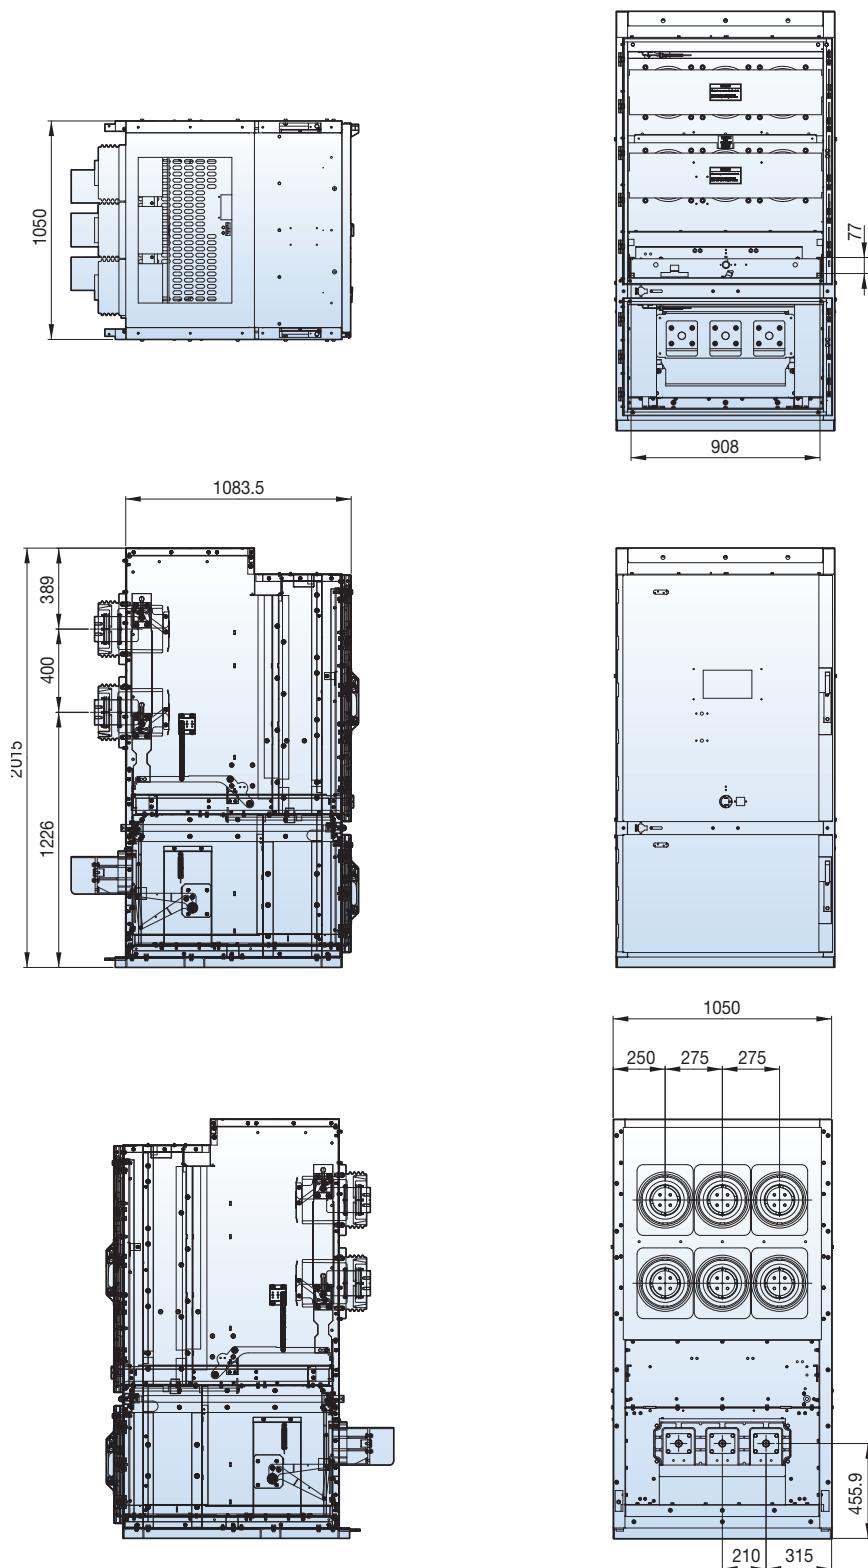
Susol**7.2/12/17.5kV, 40/50kA, 4000A****Withdrawable (Hb type cradle, phase distance 275mm)**

Dimensions -VH type





Susol





7.2/12kV, 40/50kA, 5000A

Withdrawable (H type unit, phase distance 320mm)

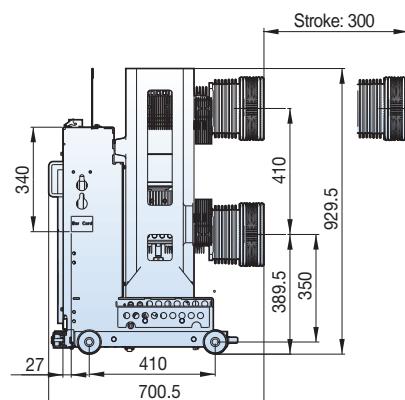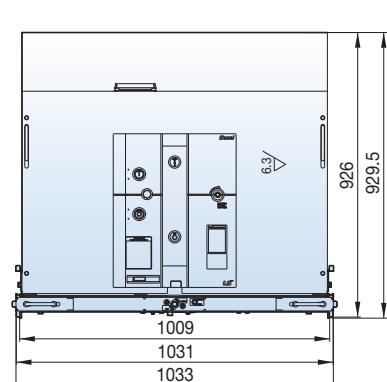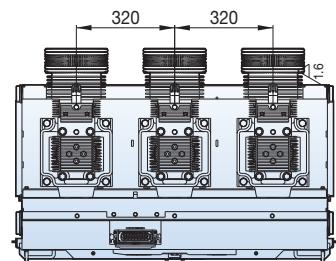

Withdrawable (Ha type cradle, phase distance 320mm, Normal Type)

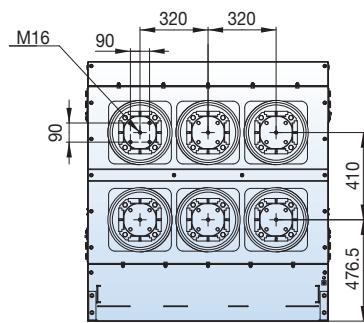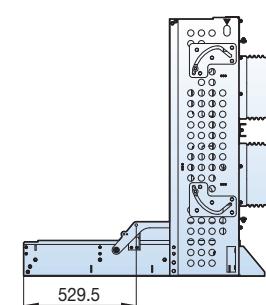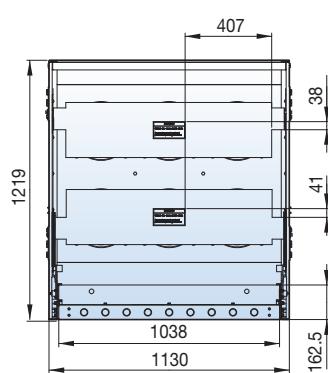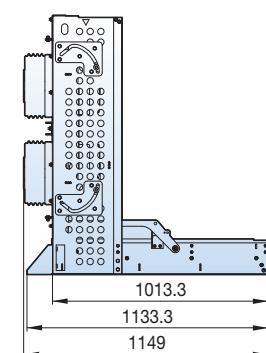

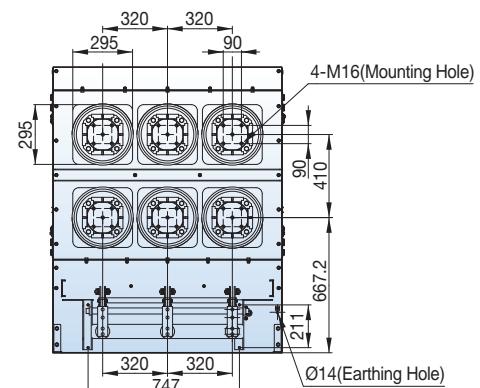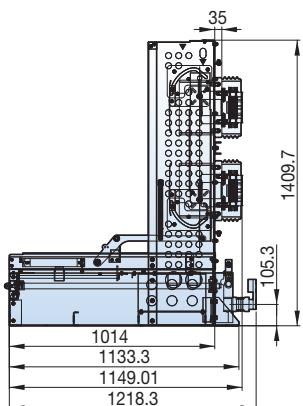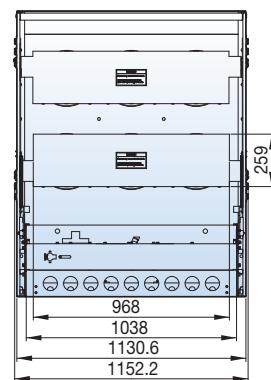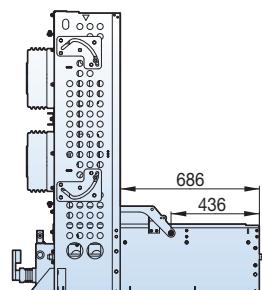
Susol**7.2/12kV, 40/50kA, 5000A****Withdrawable (Ha type cradle, phase distance 320mm, with Earthing Switch)****The same applies to MOC or TOC**

Dimensions -VH type


Susol


24kV, 25kA, 2500A

Fixed (P type, phase distance 275mm)

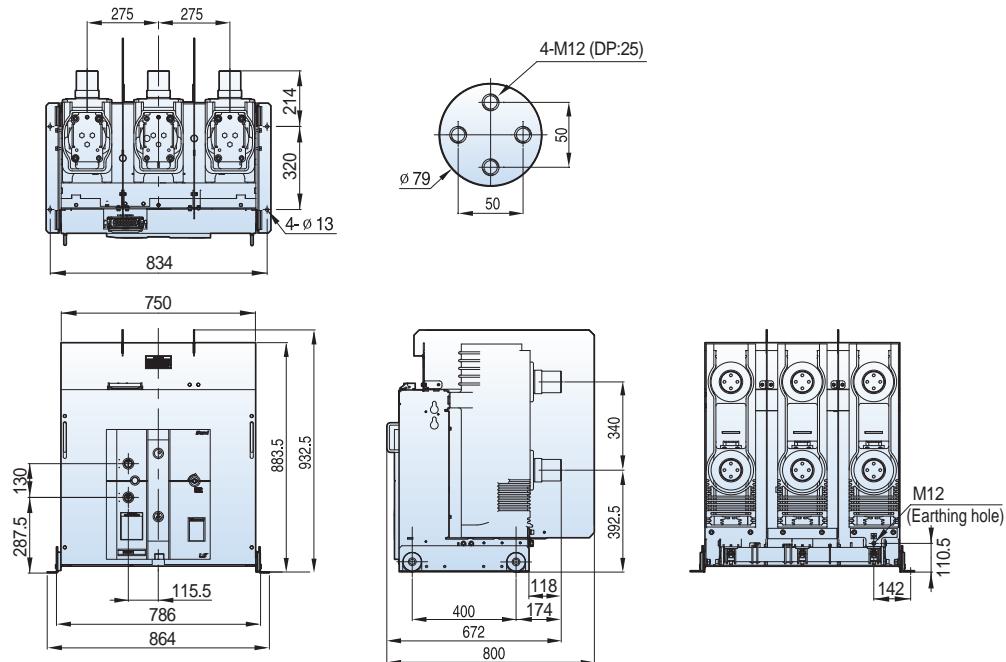

Withdrawable (H type unit, phase distance 275mm)

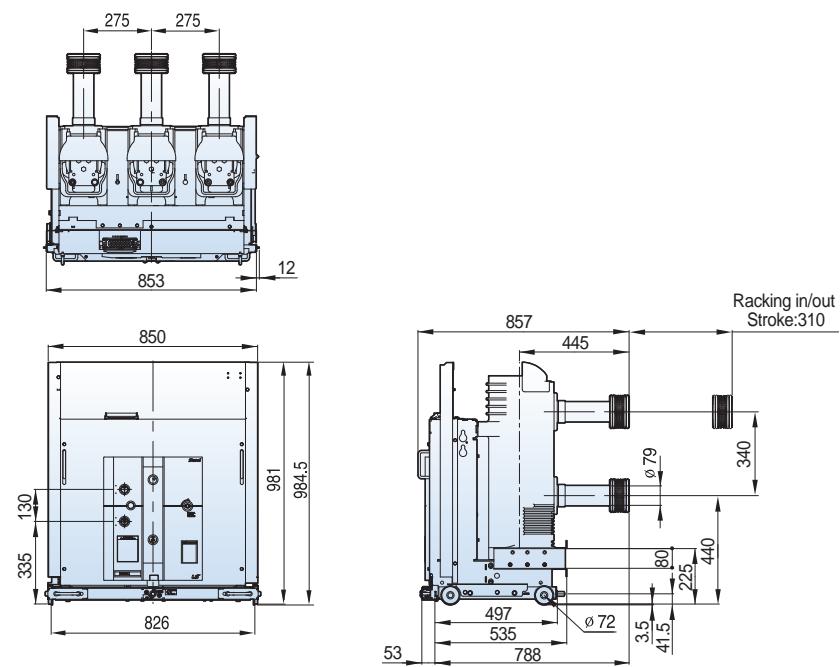

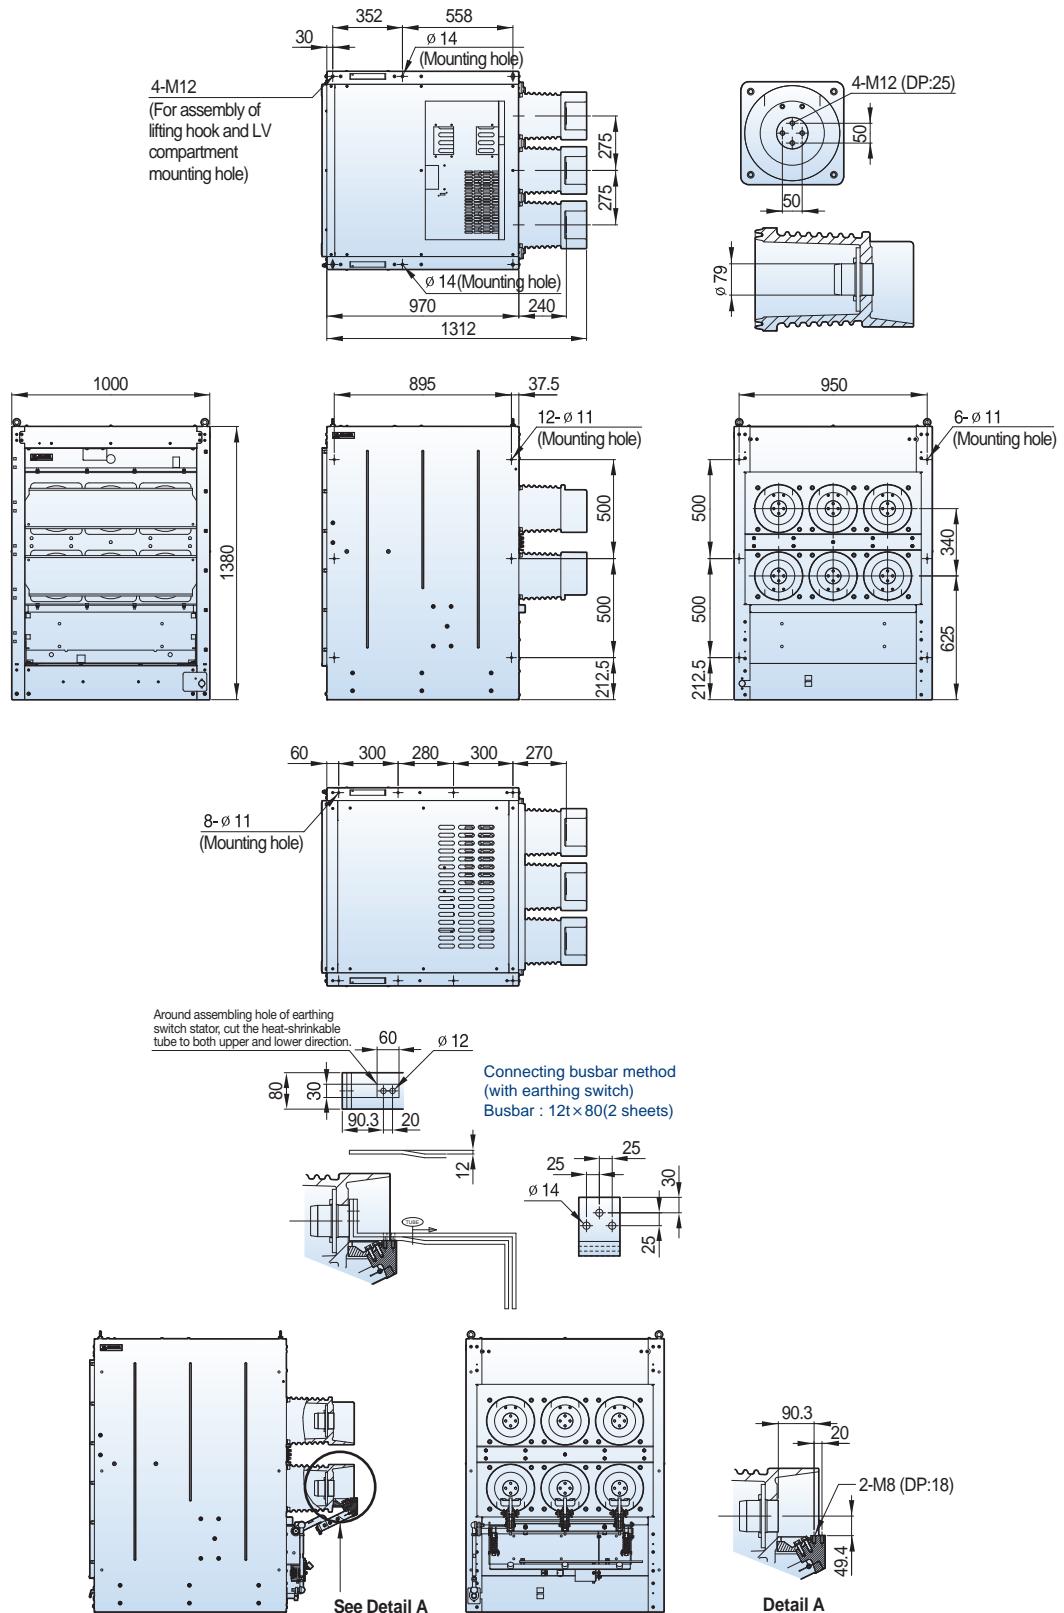
Susol**24kV, 25kA, 2500A****Withdrawable (H cradle, phase distance 275mm)**

Dimensions -VH type


Susol


24kV, 31.5/40kA, 1250/2000A

Fixed (P type, phase distance 210mm)

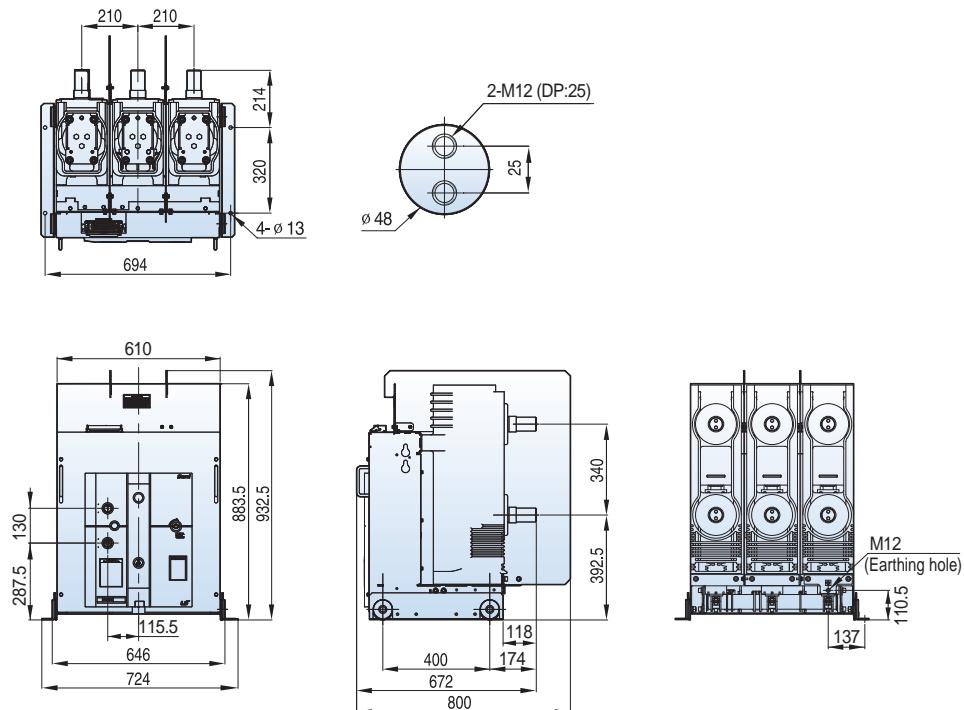

Withdrawable (H type unit, phase distance 210mm)

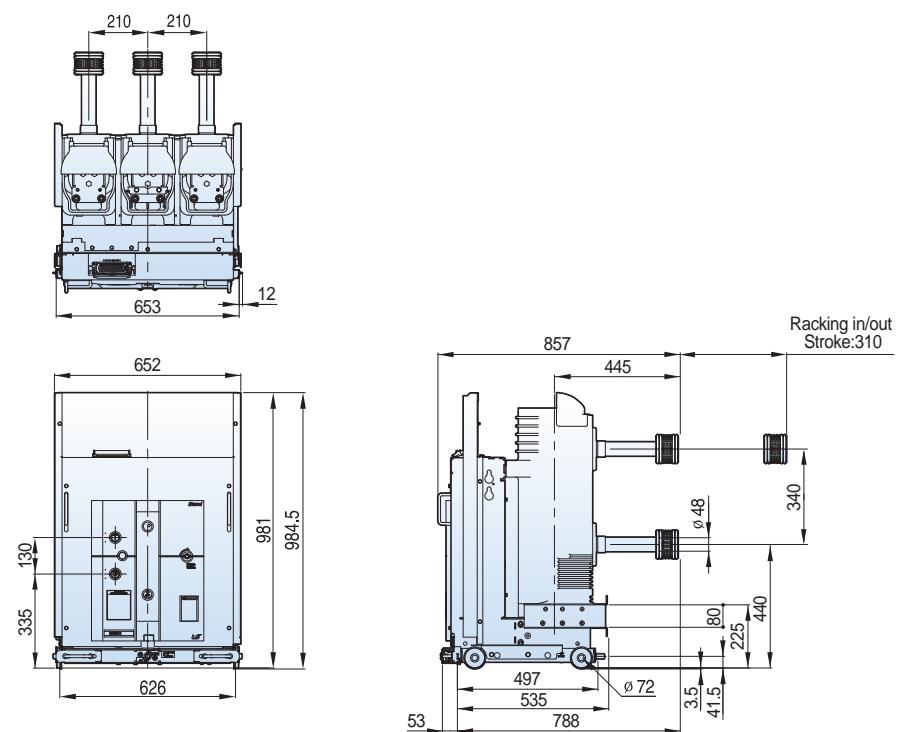

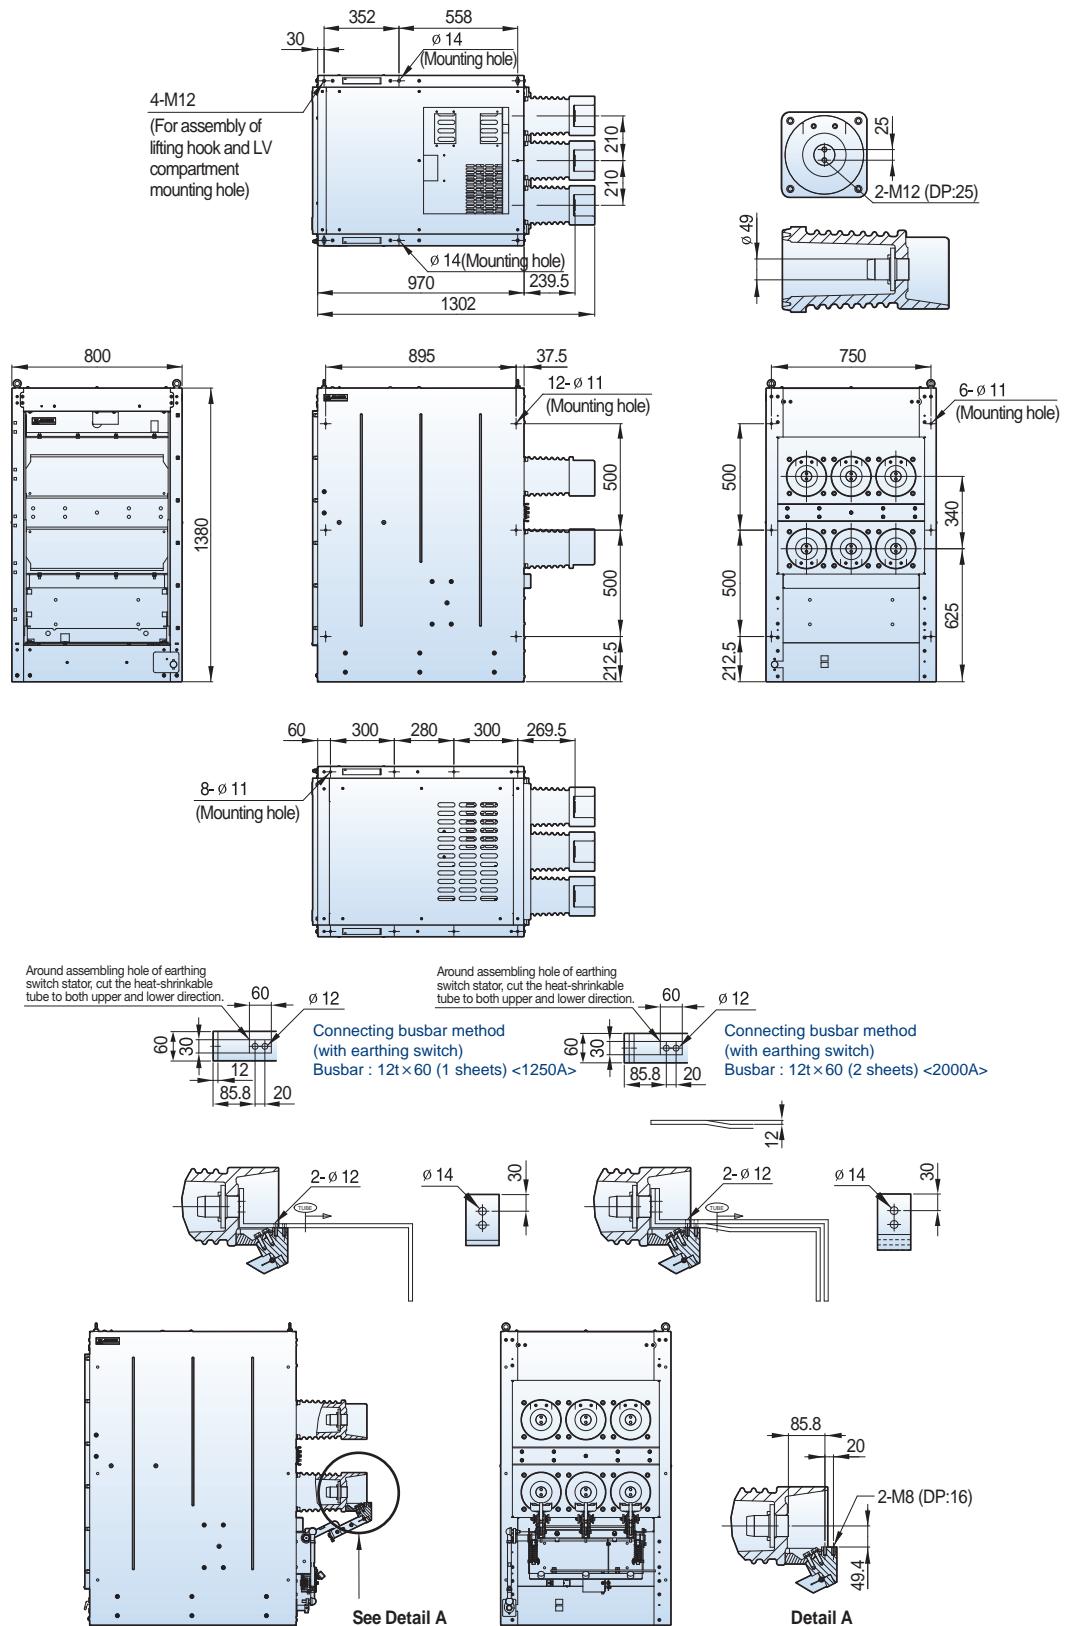
Susol**24kV, 31.5/40kA, 1250/2000A****Withdrawable (H cradle, phase distance 210mm)**



Dimensions -VH type

Susol

24kV, 31.5/40kA, 1250/2000A

Withdrawable (H cradle, Rotated bushing type, phase distance 210mm)

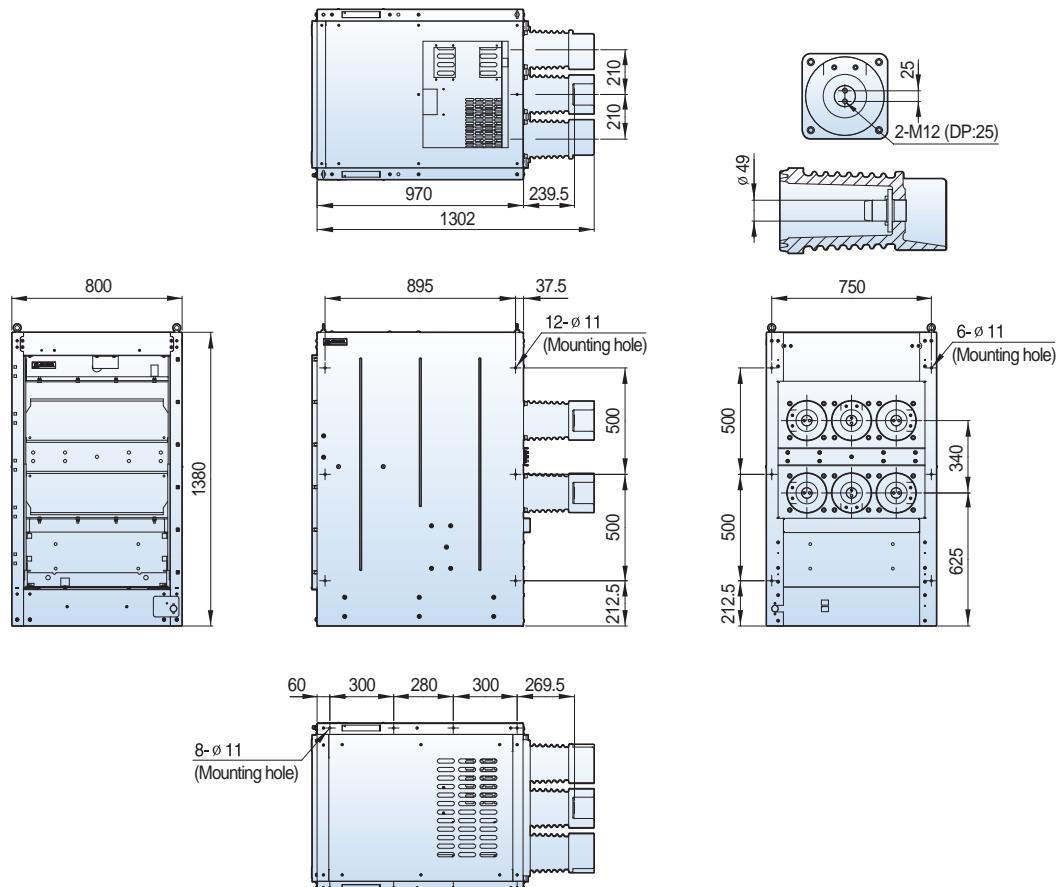

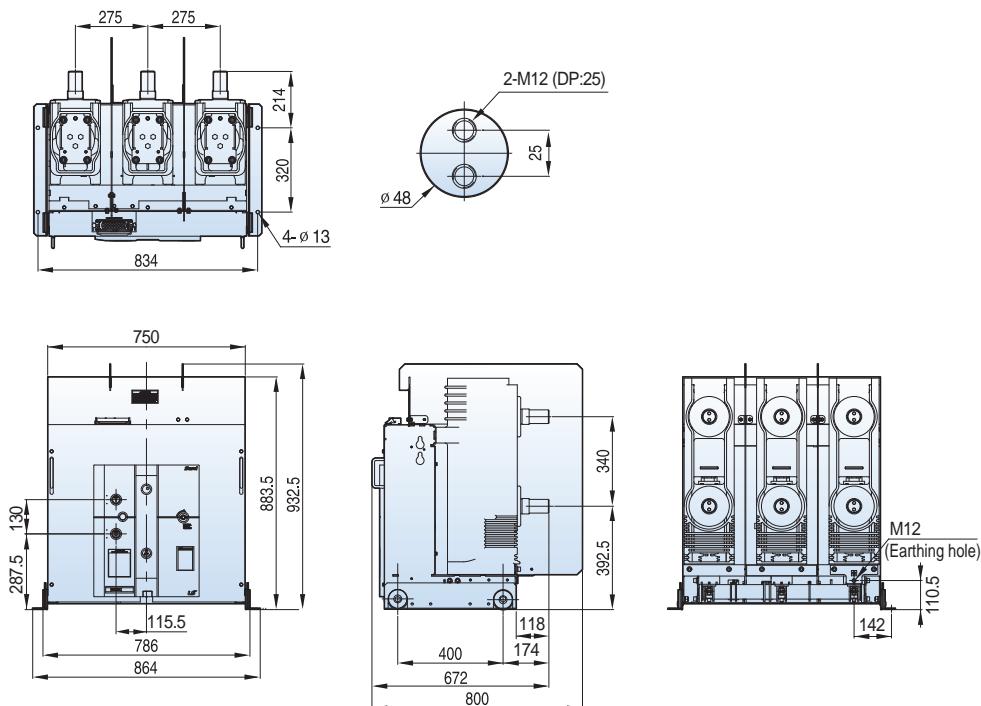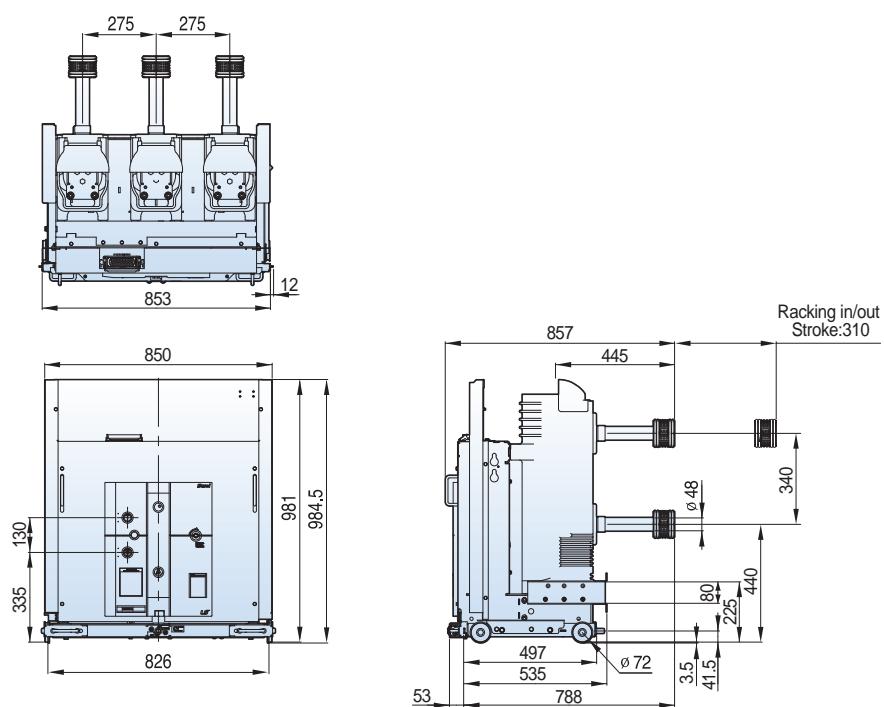
Susol**24kV, 31.5/40kA, 1250/2000A****Fixed (P type, phase distance 275mm)****Withdrawable (H type unit, phase distance 275mm)**

Dimensions -VH type

Susol

24kV, 31.5/40kA, 1250/2000A


Withdrawable (H cradle, phase distance 275mm)

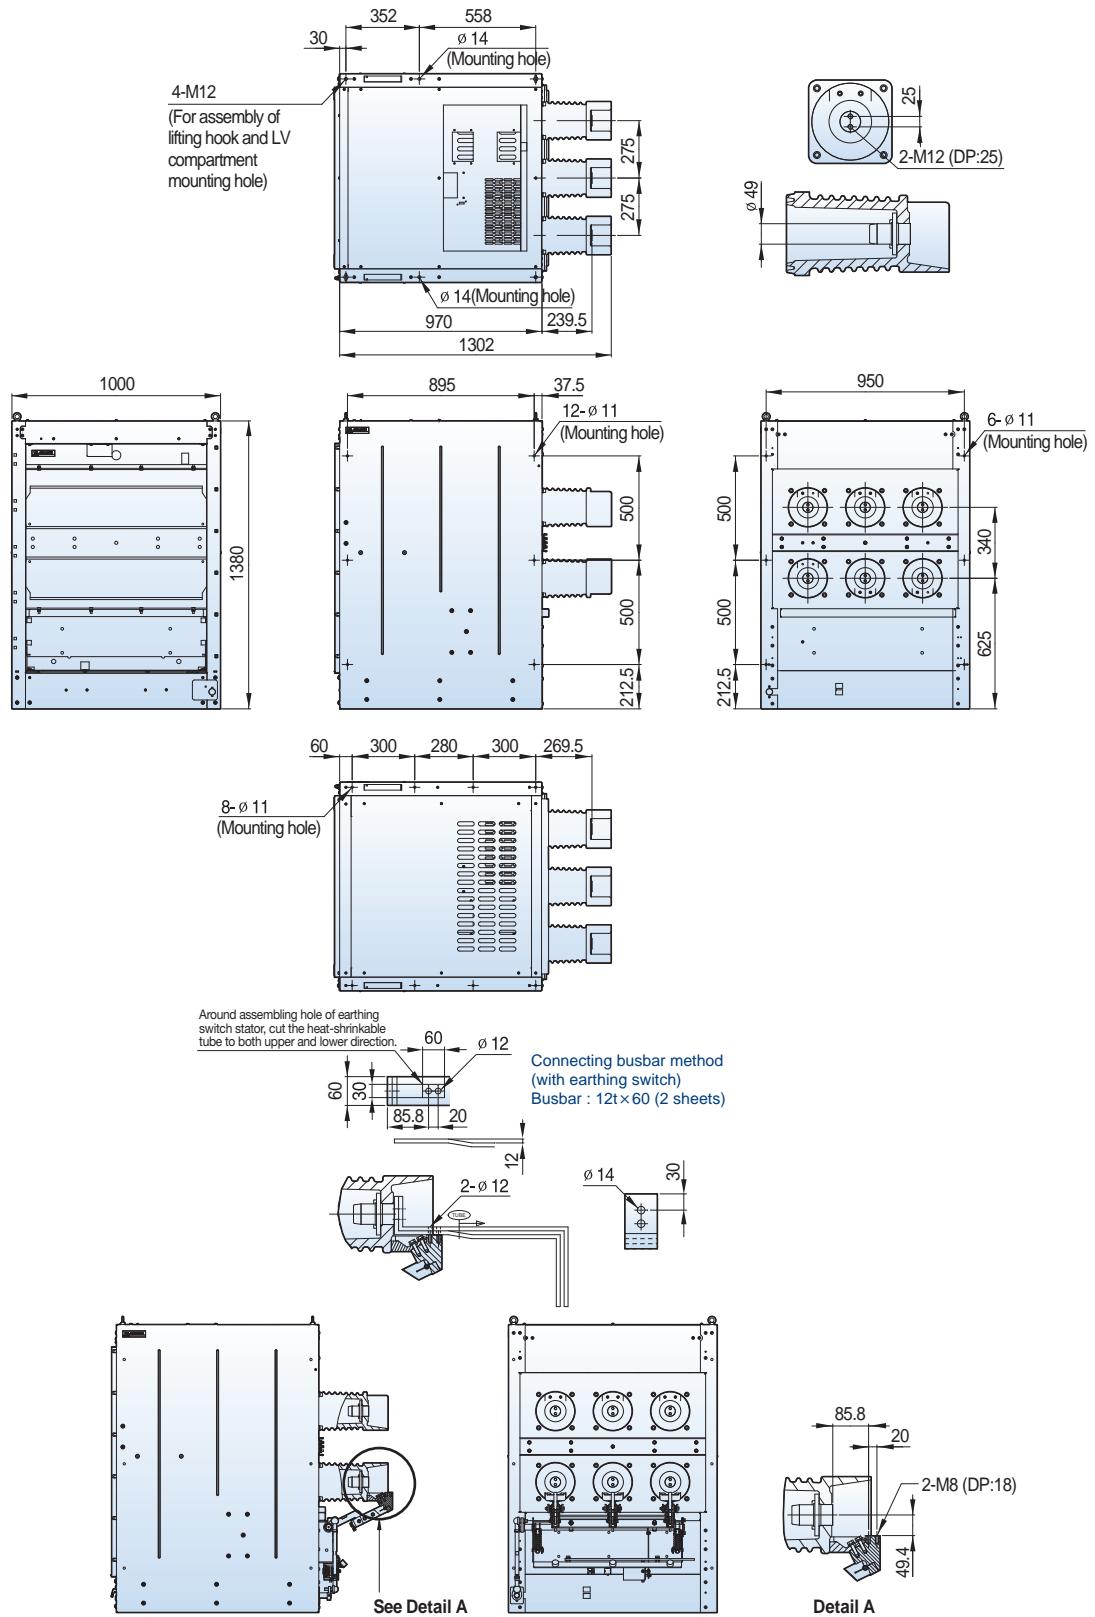


Susol

24kV, 31.5/40kA, 3150A

Fixed (P type, phase distance 275mm)

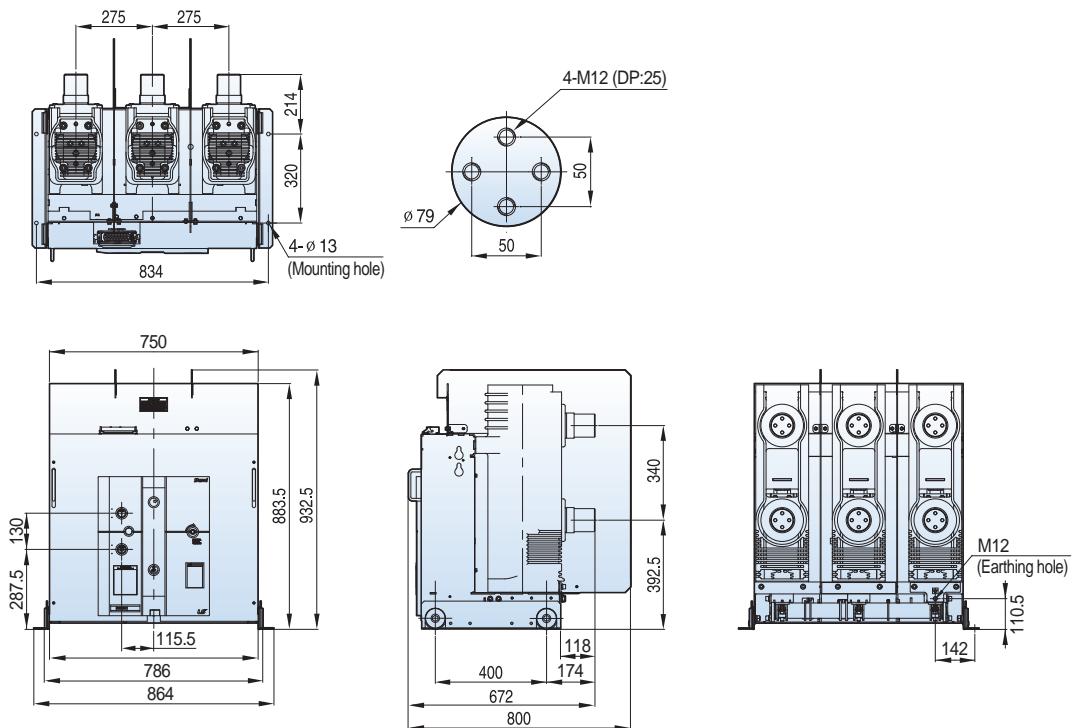

Withdrawable (H type unit, phase distance 275mm)

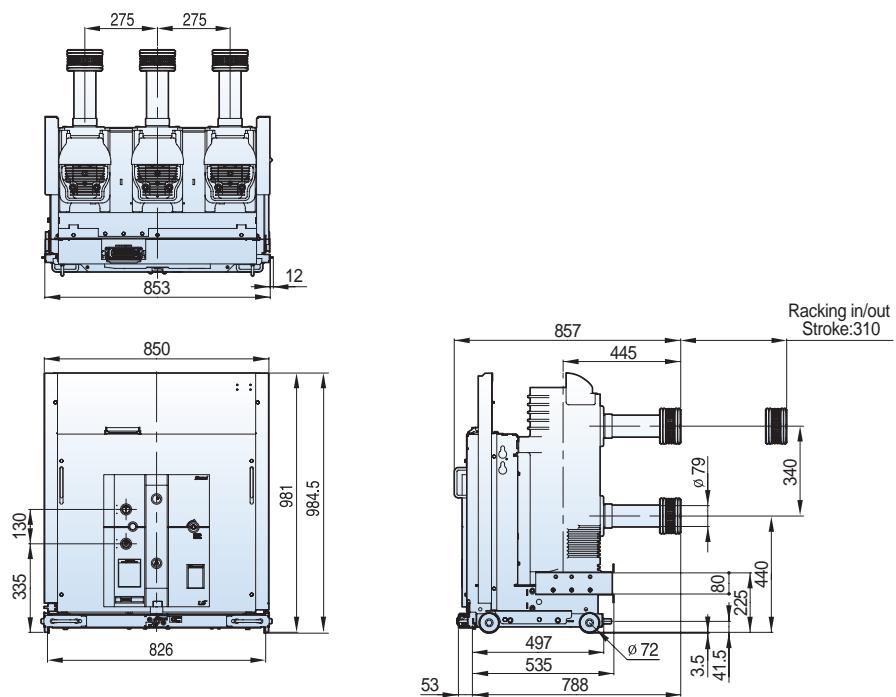




Dimensions -VH type

Susol

24kV, 31.5/40kA, 3150A

Withdrawable (H type cradle, phase distance 275mm)

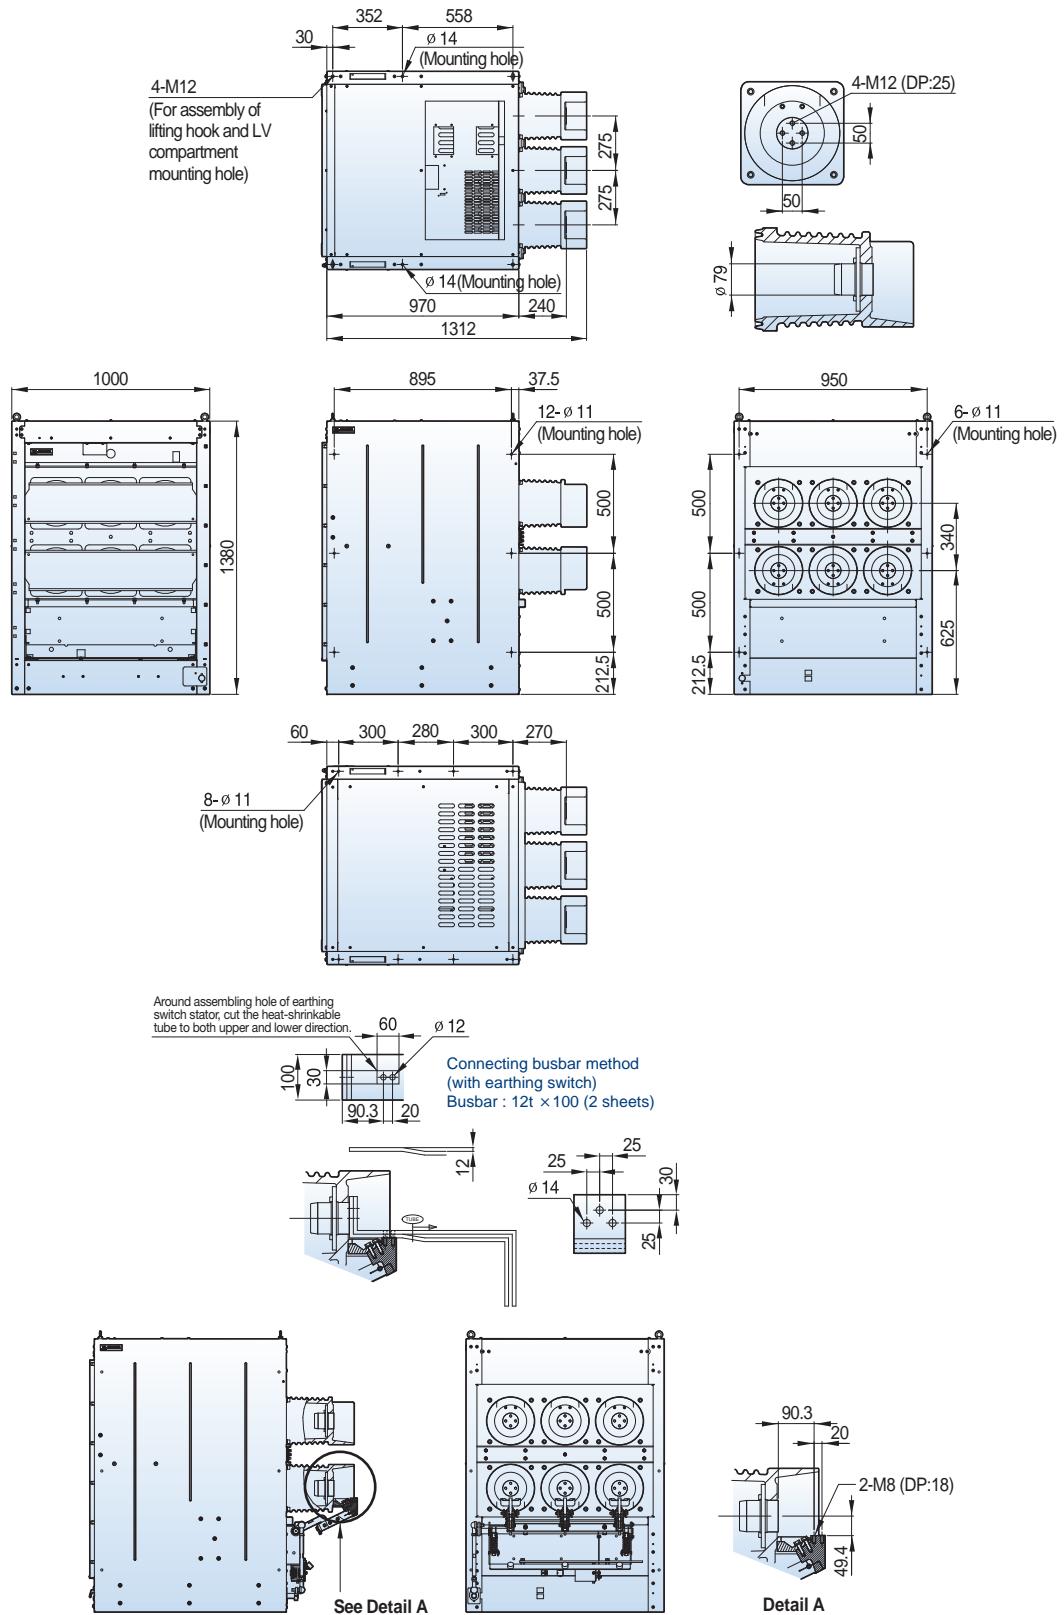

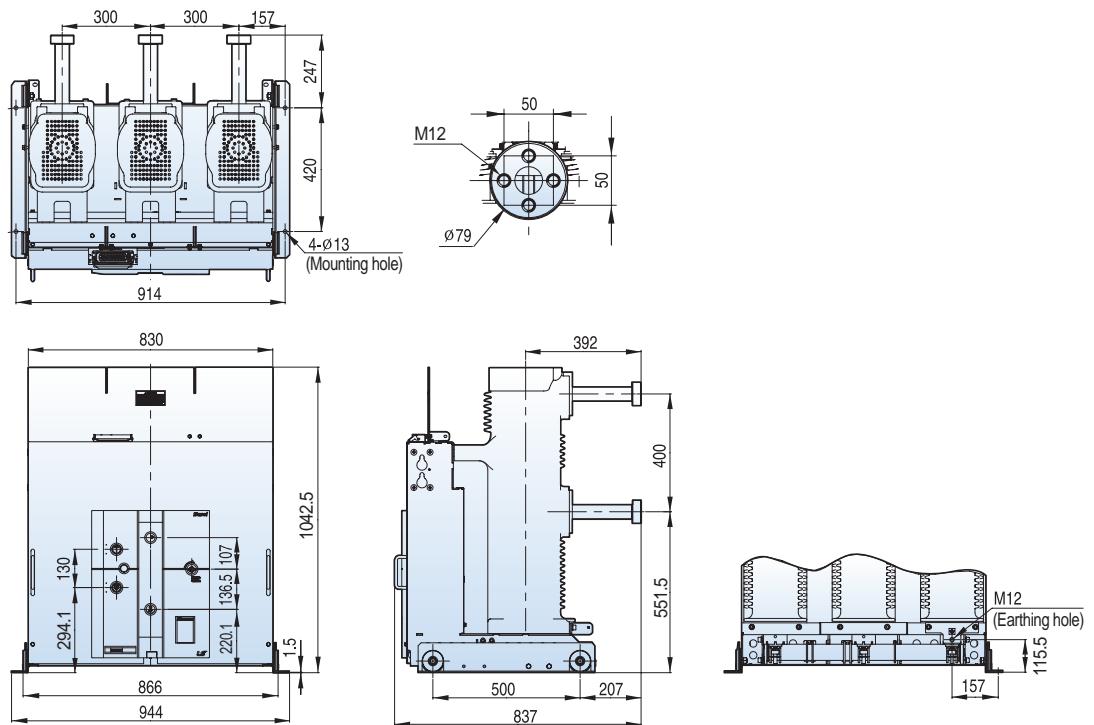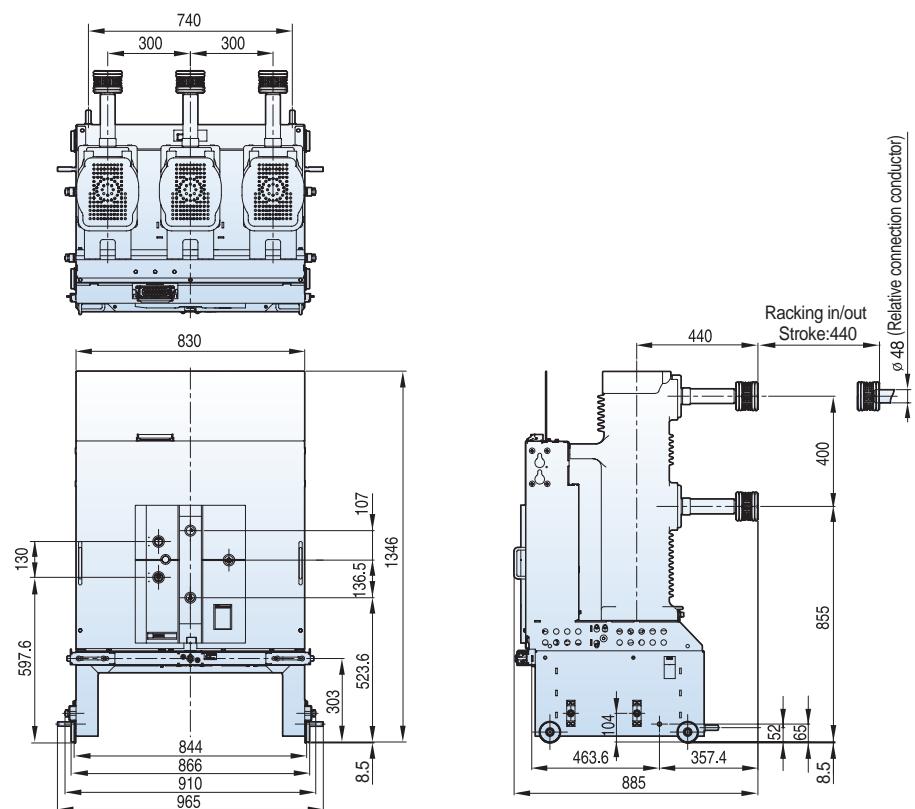
Susol**36kV, 25/31.5/40kA, 1250/2000A****Fixed (P type, phase distance 300mm)****Withdrawable (H type unit, phase distance 300mm)**



Dimensions -VH type

Susol

36kV, 25/31.5/40kA, 1250/2000A

Withdrawable (H type cradle, phase distance 300mm)

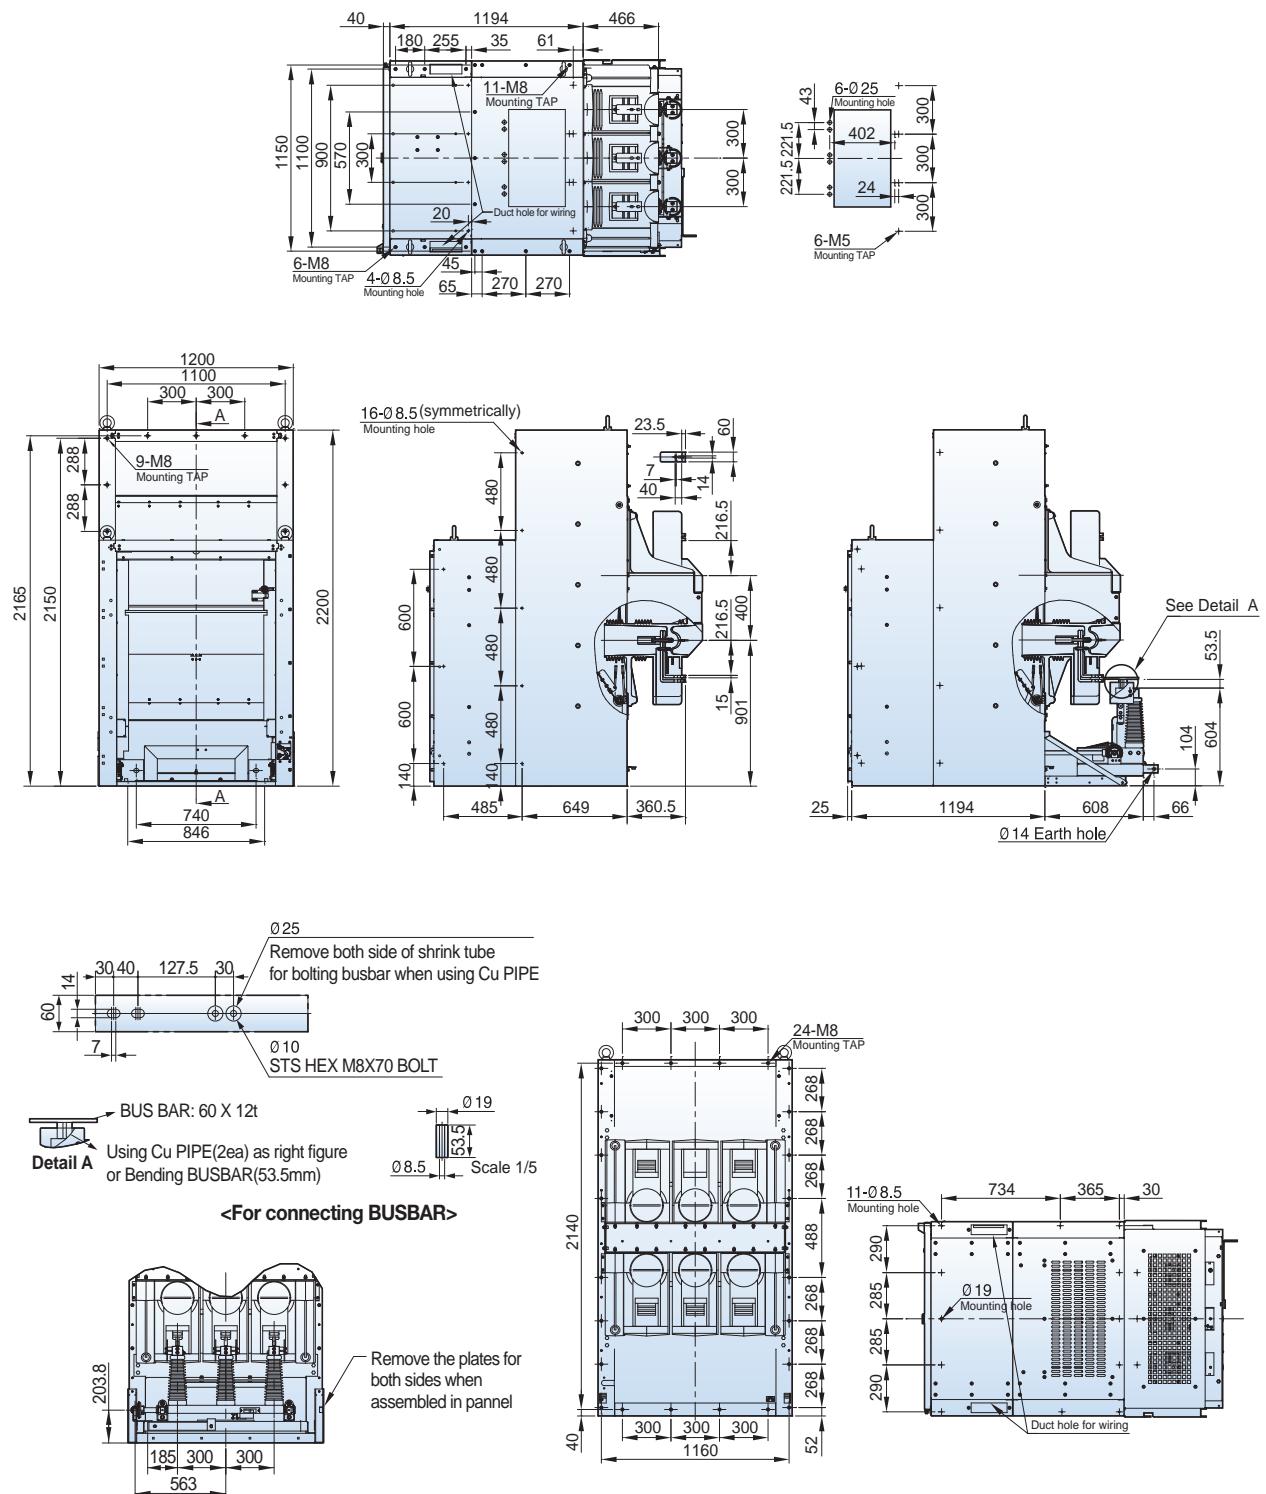

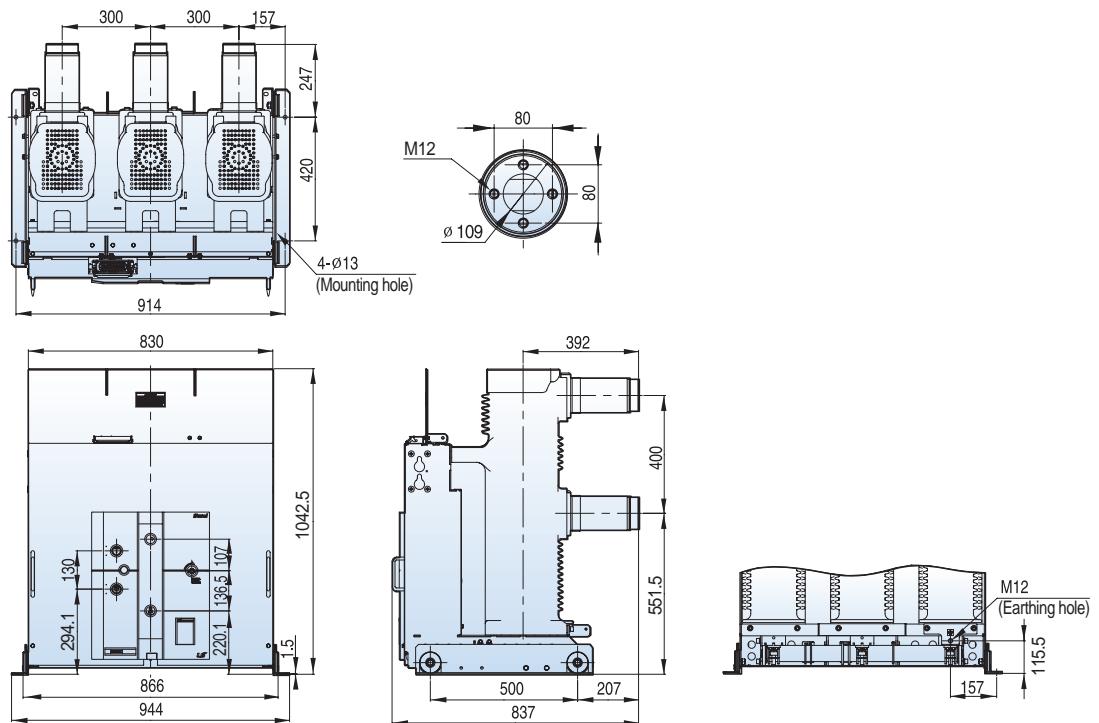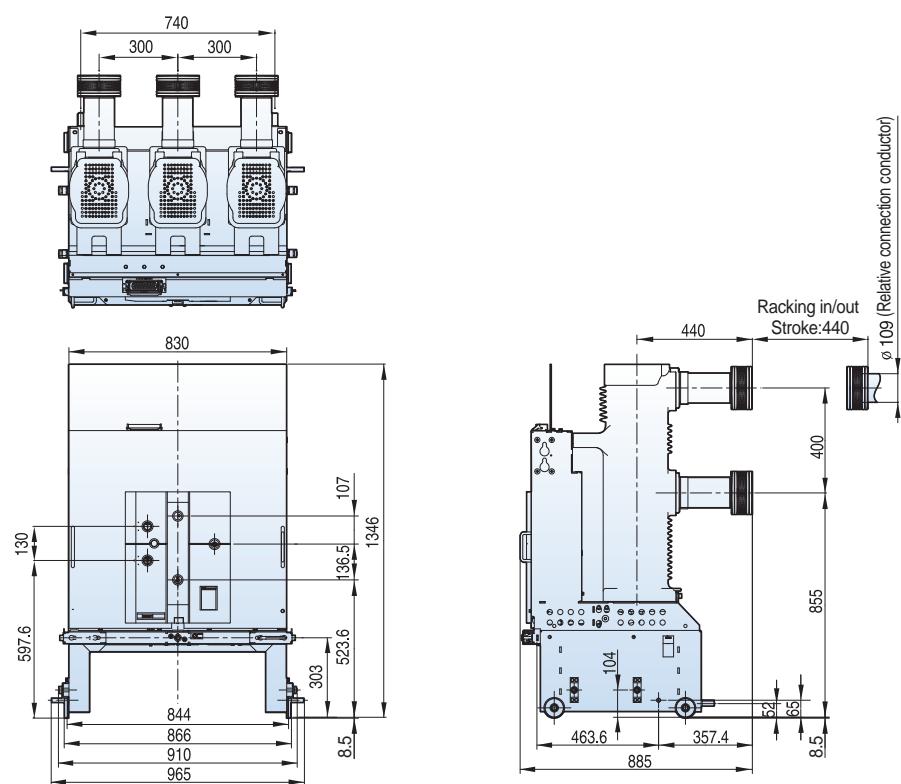Susol**36kV, 25/31.5/40kA, 3150A****Fixed (P type, phase distance 300mm)****Withdrawable (H type unit, phase distance 300mm)**


Dimensions -VH type

VH-06/12/17/20/25/36

Susol

36kV, 25/31.5/40kA, 3150A

Withdrawable (H type cradle, phase distance 300mm)

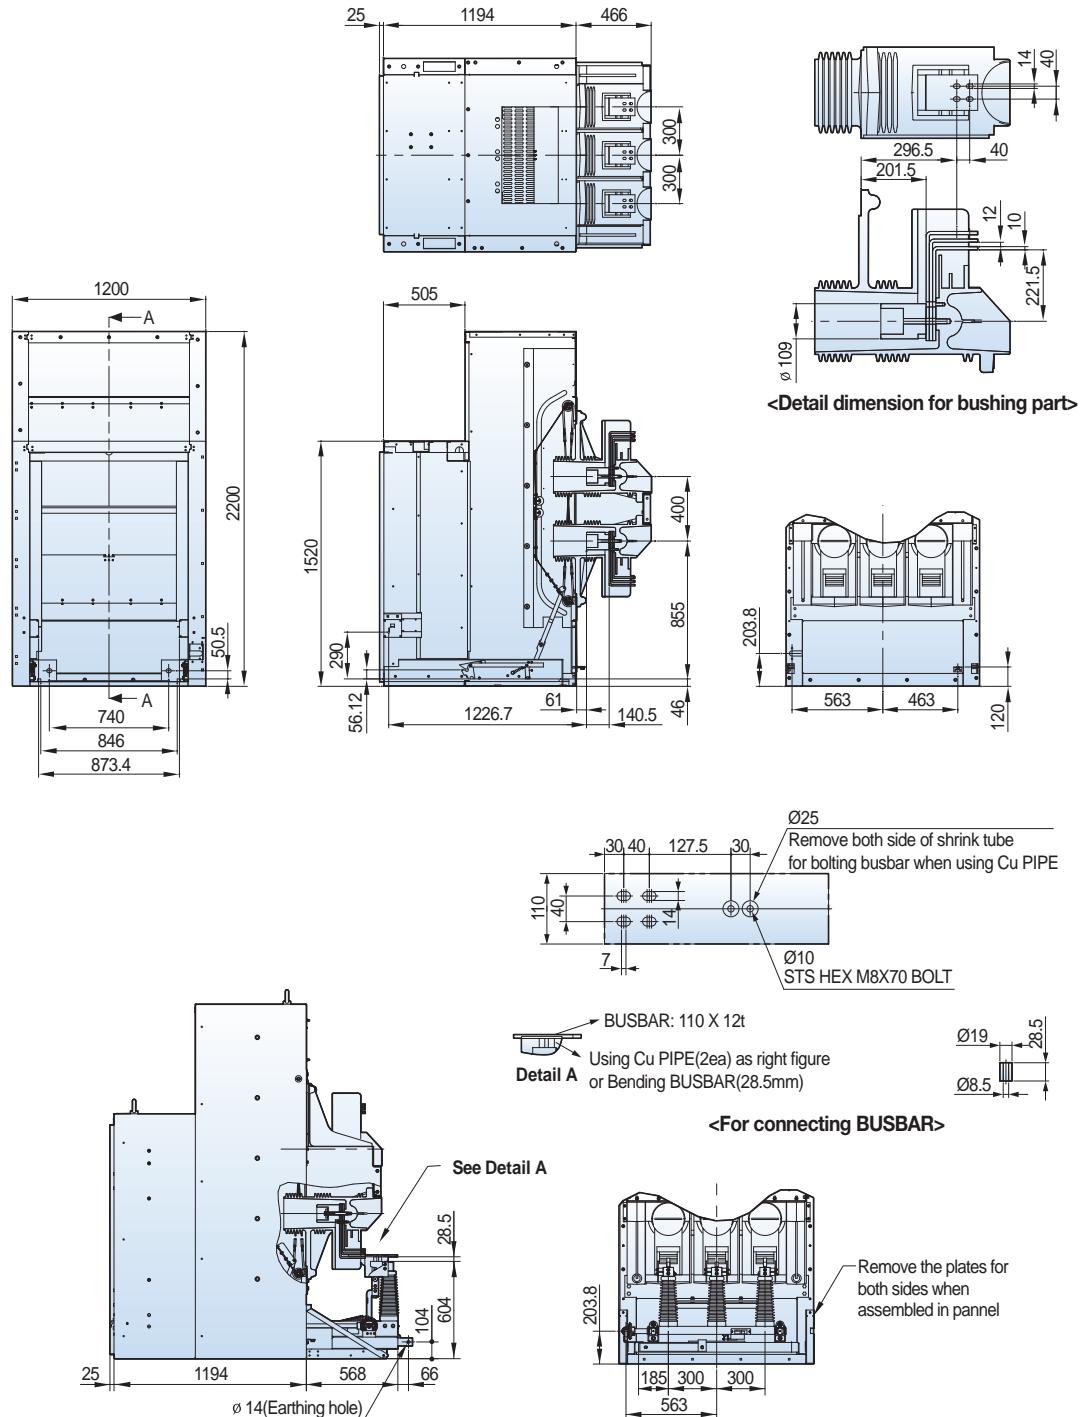


* Mounting information is same as 36kV 25/31.5/40kA 1250/2000A

Side-Mount type VCB

Susol

25.8kV 16kA 630A

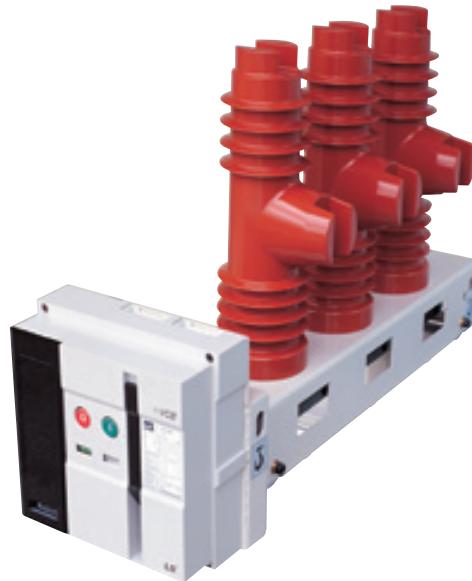


Item			VL-25□16B 06
Rated voltage	Ur (kV)		25.8
Rated normal current	Ir (A)		630
Rated frequency	fr (Hz)		50/60
Rated short-circuit breaking current	Isc (kA)		16
Rated short-time withstand current (3 sec)	Ik (kA)		16
Rated short-circuit breaking capacity	(MVA)		665/715
Rated short-circuit making current	Ip (kA)		40/41.6
Rated breaking time	(cycle)		3
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	60 125
Rated operating sequence			O-0.3s-CO-3min-CO
Control voltage	Closing coil Trip coil	(V)	DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V, AC 48V, AC 100~130V, AC 200~250V DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V, AC 48V, AC 100~130V, AC 200~250V
Auxiliary contact			5a5b
Rated opening time	(sec)		≤ 0.04
No-load closing time	(sec)		≤ 0.06
Type test class	Mechanical Electrical Capacitive current switching		M1 E1 C1
Lifetime *	Mechanical Electrical	(time)	2,000 2,000
Installation	Fixed Left	Right	R type L type
Pole centre distance	(mm)		210
Weight	CB	(kg)	95
Standards			IEC 62271-100

* Lifetime with maintenance


Side-Mount type VCB

Susol


Control circuit diagram

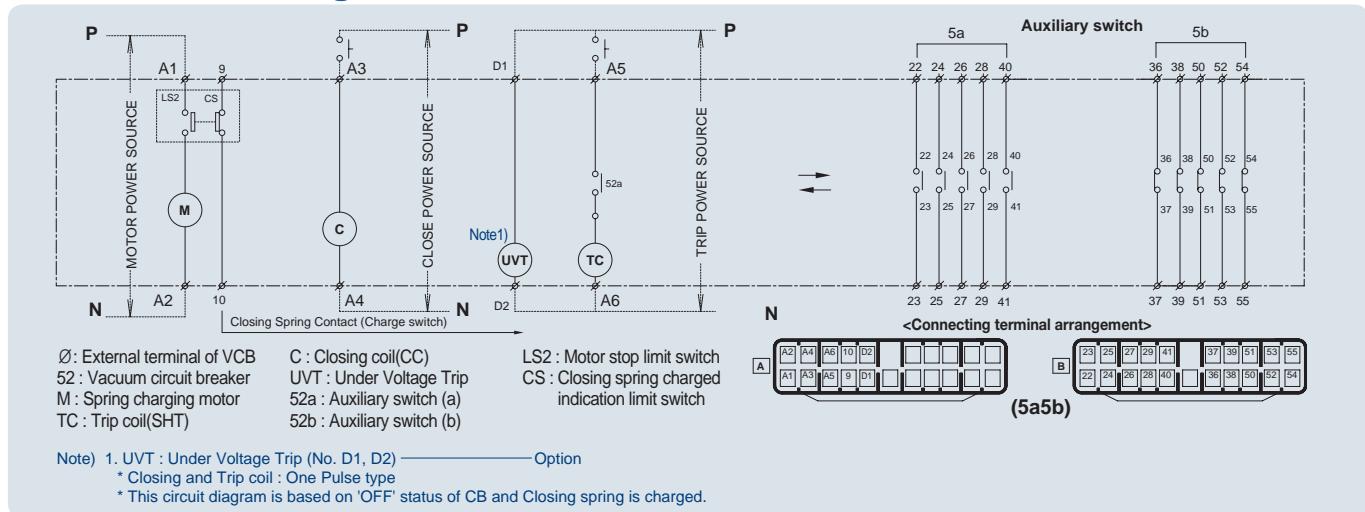

Dimension

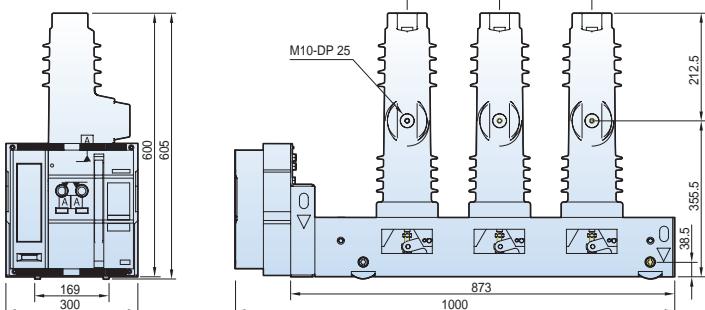

Note) This external shape is based on "R" Type (Installation type)

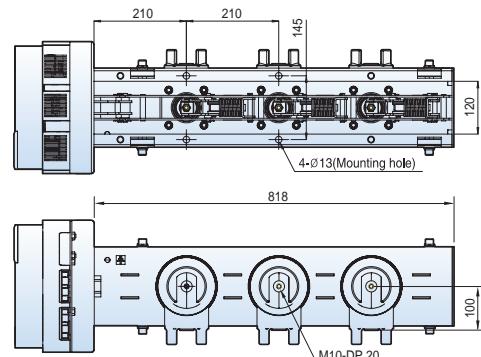

Ordering information


VL	25	R	16	B	06
Basic model name e-VCB	Rated voltage (kV) 25 25.8	Installation type R On the right (Fixed type) L On the left (Fixed type)	Breaking 16 16	Phase distance/Compatibility B 210mm	Rated current (A) 06 680

VL-25 16B06		M1	C1	T1	SA5	UVT	Other accessories
Motor control voltage	Closing coil voltage	Trip coil voltage	Aux. contact & wire ass'y				
M0 Without Motor	C0 Without Closing coil	T0 Without Trip coil	SA5 A type connector, 5a5b				
M1 DC 110V	C1 DC 110V	T1 DC 110V			U0 Without UVT	AA Lead Wire	
M2 DC 220V	C2 DC 220V	T2 DC 220V			U1 DC 110V	AB User Plug(Part)	
M3 DC 125V	C3 DC 125V	T3 DC 125V			U2 DC 220V		
M4 DC 24V~30V	C4 DC 24V~30V	T4 DC 24V~30V			U3 DC 125V		
M5 DC 48V~60V	C5 DC 48V~60V	T5 DC 48V~60V			U4 DC 24V~30V		
M6 AC 48V	C6 AC 48V	T6 AC 48V			U5 DC 48V~60V		
M7 AC 100V~130V	C7 AC 100V~130V	T7 AC 100V~130V			U6 AC 48V		
M8 AC 200V~250V	C8 AC 200V~250V	T8 AC 200V~250V			U7 AC 100V~130V		
					U8 AC 200V~250V		

Technical data


Susol

Electrical endurance by interrupting current

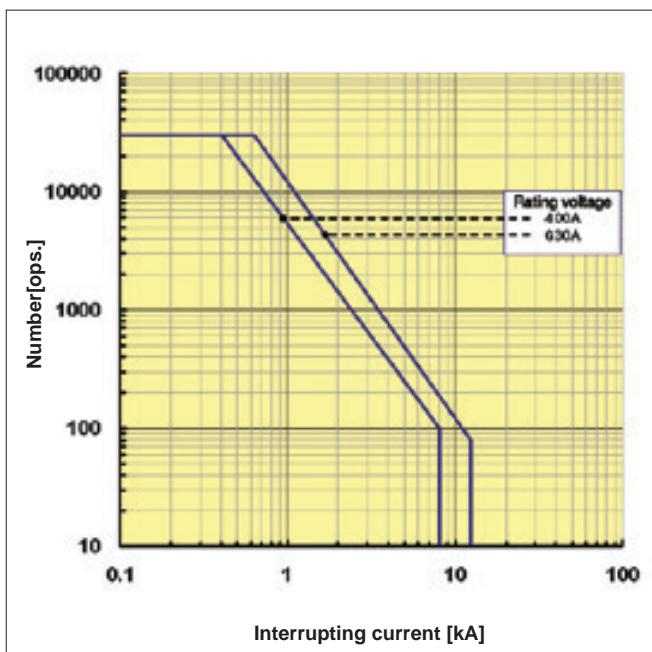


VI model LV2 at 7.2kV

- N : Operation numbers
- I : Interrupting current

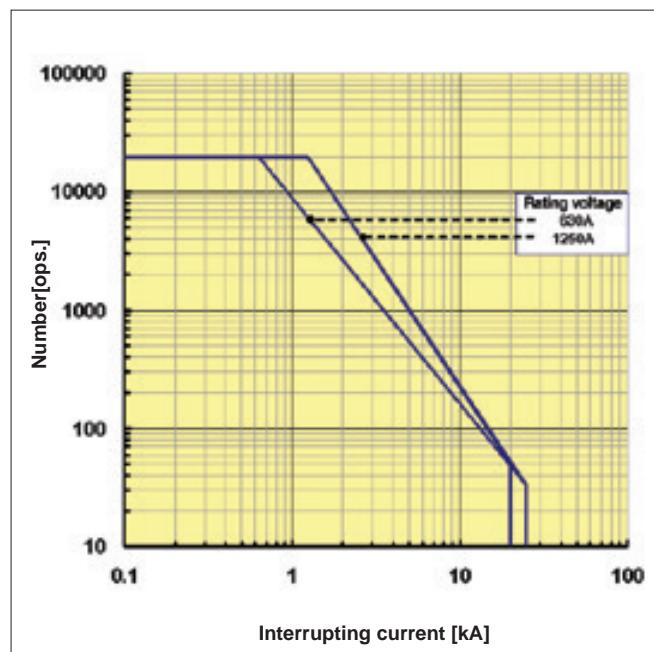


VI model LV3 at 7.2kV

- N : Operation numbers
- I : Interrupting current

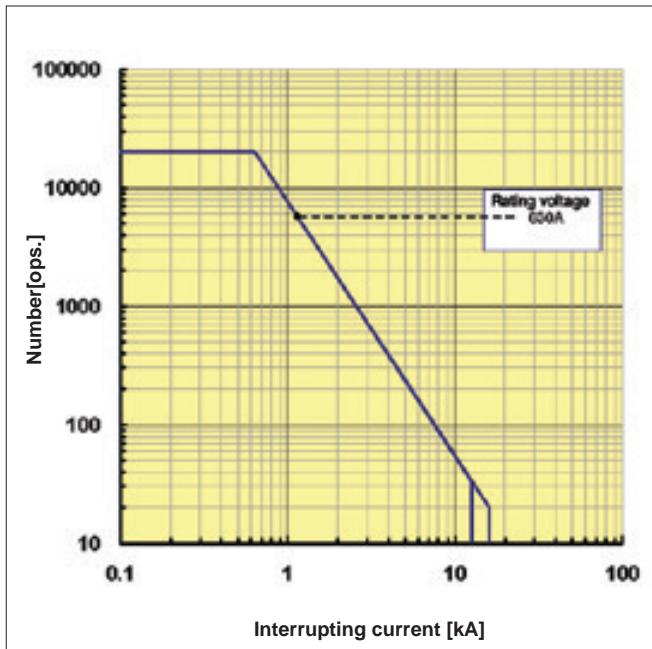

VI model LV4 at 24kV

- N : Operation numbers
- I : Interrupting current

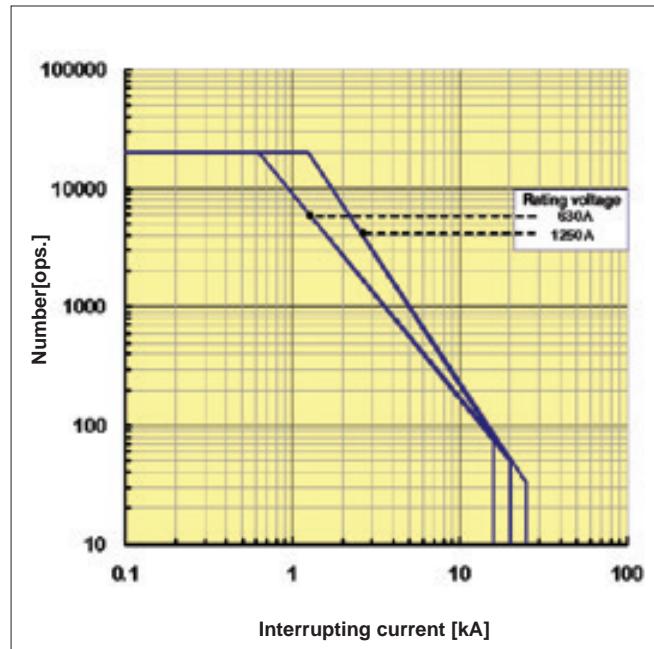




VI model LV5 at 17.5kV

- N : Operation numbers
- I : Interrupting current

Technical data

Susol

Electrical endurance by interrupting current

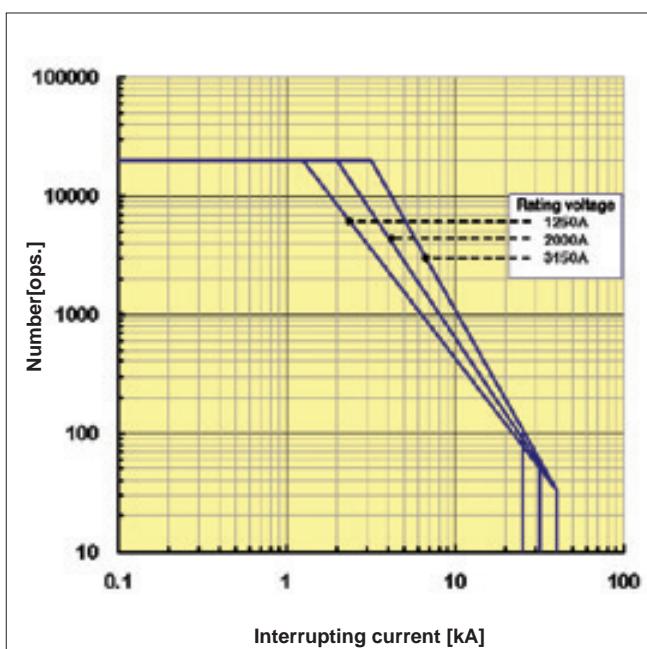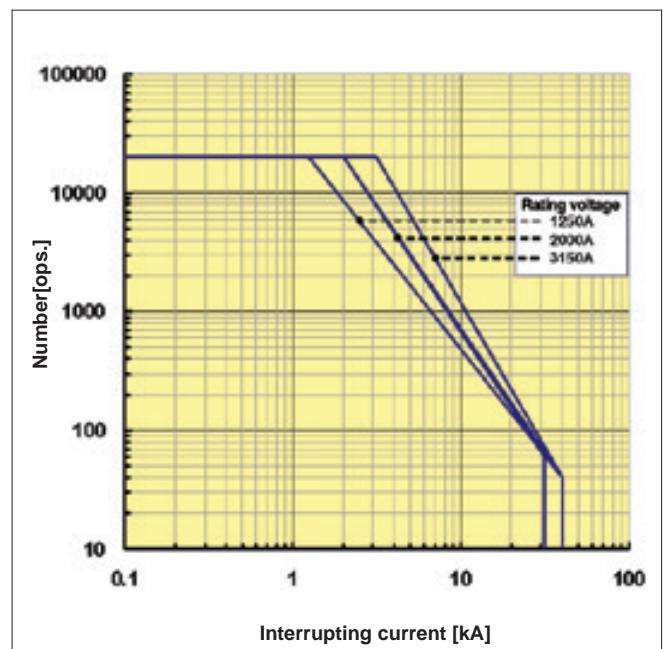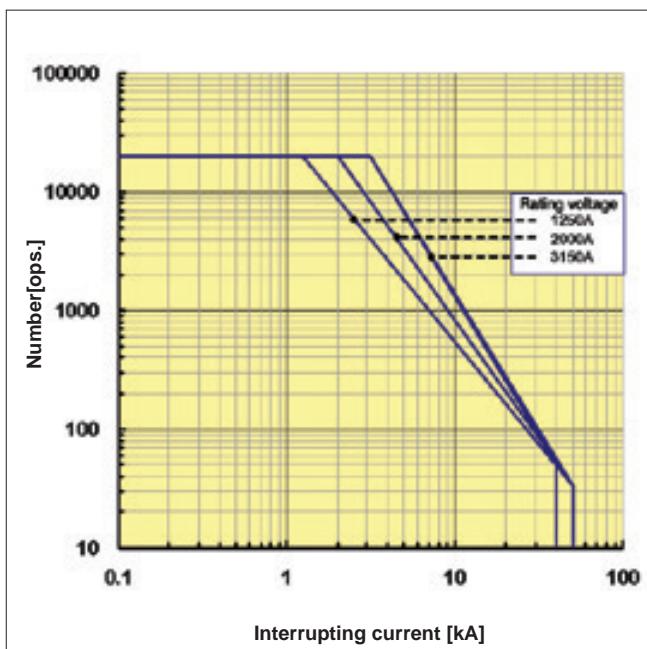

- N : Operation numbers
- I : Interrupting current

Note) 1. Above graphs represent the characteristics of the electrical life of LS Susol VCB.
2. Life characteristics of each model in each rating represents the LOG-LOG graphs.

Standard Use Environment for Susol VCB

The operation characteristic of Vacuum Circuit Breaker such as insulation and endurance is often influenced largely by external environment and thus should be applied appropriately with conditions of the place where it is used taken into consideration.

The following values are the limits have been set in accordance with IEC 62271-100 (IEC 62271-1)

Ambient Temperature

- maximum temperature: +40°C
- 24-hour average maximum temperature: +35°C
- minimum temperature: -5°C

Altitude

- 1000m or less above sea level

Relative Humidity

- 24 hours average value: 95% or less
- One month average: 90% or less



- If a standard circuit breaker is used in high temperature exceeding 40°C, you are advised to use it according to the current corrected for each level of ambient temperature in catalog.
- If used in conditions of high humidity, the dielectric strength or electric performance may be degraded.



- It is highly recommended to use a dust cover or anti-humid agent if it is used in dusty and humid conditions.
- Excessive vibration may cause a trip breaker such as connection fault or flaw on mechanical parts.



- If it is left ON or OFF for a long time, it is recommended to switch load current on a regular basis.
- It is recommended to put it in the sealed protection if corrosive gas is prevalent.

Technical data

Susol

Special Use Environment

The circuit breaker is designed for use in standard use environment specified in Section 2.1 of IEC62271-1. Concerning the special use environments as below the special use conditions are required to be considered, thus please contact us in advance.

- where altitude and ambient temperature are out of standard use environment.(-40°C)
 - where a strong sea breeze blows
 - when usually used in a humid place
 - where a lot of steam or oil steam exists
 - where explosive, flammable and other harmful gases might permeate the breaker
 - In a dusty place
 - where abnormal vibration or shock exists
 - where a lot of ice and snow exist
 - other special conditions


Withstand voltage compensation according to altitude

If the breaker is used in areas of sea level higher than 1000m the degradation of insulation performance should be taken into consideration.


	70	36	170
Ud [kV/1min]	50(65)	24	125
	38	17.5	95
	28(42)	12	75(82)
	20	7.2	60
Ur[kV]			Up [kV/1.2 × 50μs]

<Table 1> Criteria of withstand voltages by rated voltages specified in IEC62271-1

Withstand voltage compensation according to altitude

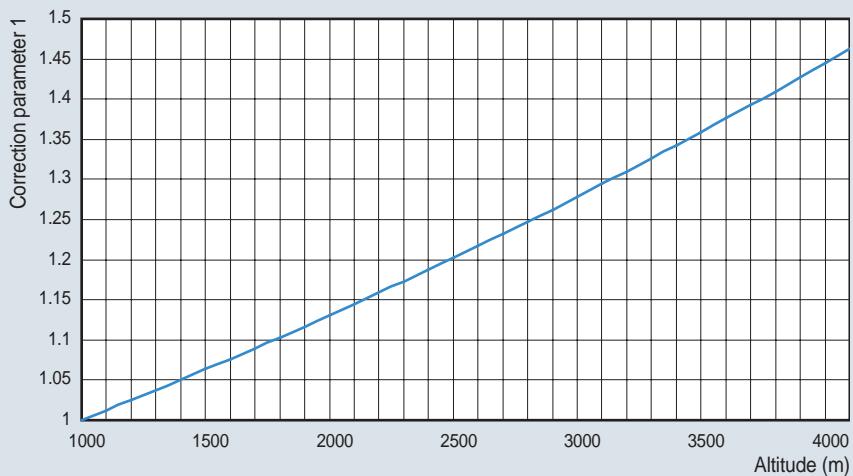

<Fig.1 > withstand voltage correction parameter 1 by altitude (based on a required withstand voltage)

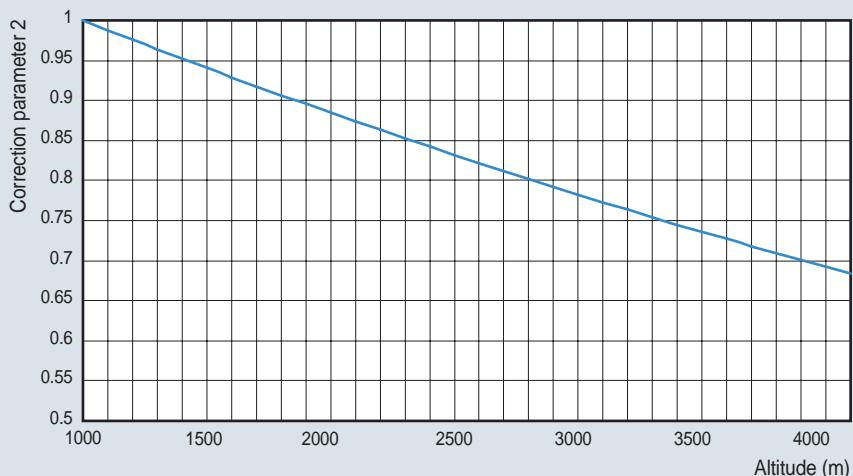

<Fig.2 > withstand voltage correction parameter 2 by altitude (based on a applicable withstand voltage)

Ex) Selecting a breaker to be used in a place of 2500m above sea level with a rated voltage 7.2kV (correction parameter 1 applied)

- correction parameter at 2500m is 1.2
- criteria of withstand voltage by rated voltage:
Power Frequency Withstand Voltage (U_d) = 20kV, Impulse Withstand Voltage (U_p) = 60kV
- requirements withstand voltage criteria:
Power Frequency Withstand Voltage (U_d) = $20 \times 1.2 = 24$ kV, Impulse Withstand Voltage (U_p) = 72kV
Therefore rated voltage 12kV breaker shall apply to satisfy the required withstand voltage.

Ex) To apply a breaker with a rated voltage 12kV to the place of 2,500m above sea level (correction parameter 2 applied)

- correction parameter at 2500m is 0.825
- dielectric strength of VCB : Power Frequency Withstand Voltage (U_d) = $28 \times 0.825 = 23.1$ kV,
Impulse Withstand Voltage (U_p) = $75 \times 0.825 = 62$ kV/ $1.2 \times 50 \mu s$
Therefore above breaker with rated voltage 12kV shall apply to rated voltage system 7.2kV at the altitude.

Technical data

Susol

Special Use Environment

Rated current compensation in accordance with ambient temperature

When normal ambient temperature exceeds the temperature specified in the environment the following formula help to select the applicable current.

$$I_a = I_r \left((\Theta_{\max} - \Theta_a) / \Theta_r \right)^{1/2}$$

I_a : allowable continuous current in the actual ambient temperature Θ_a

I_r : rated current at 40°C ambient temperature

Θ_{\max} : acceptable overall temperature of the hottest spot


Θ_a : the actual ambient temperature expected at -30°C and 60°C

Θ_r : allowable temperature in the hottest place at rated current

Ex) The calculation of the applicable load current value when a breaker with rated current 2000A is used at 55 °C ambient temperature
 $I_a = 2000 \times ((105-55)/65)^{1/2} = 2000 \times 0.87 = 1754A$

Rated current (A)	Ambient temperature (°C)								
	20	25	30	35	40	45	50	55	60
4000	4000	4000	4000	4000	4000	3843	3679	3508	3328
3150	3150	3150	3150	3150	3150	3026	2898	2763	2621
2000	2000	2000	2000	2000	2000	1922	1840	1754	1664
1250	1250	1250	1250	1250	1250	1201	1150	1096	1040
630	630	630	630	630	630	605	580	553	524

<Table 2> Allowable load current by ambient temperature

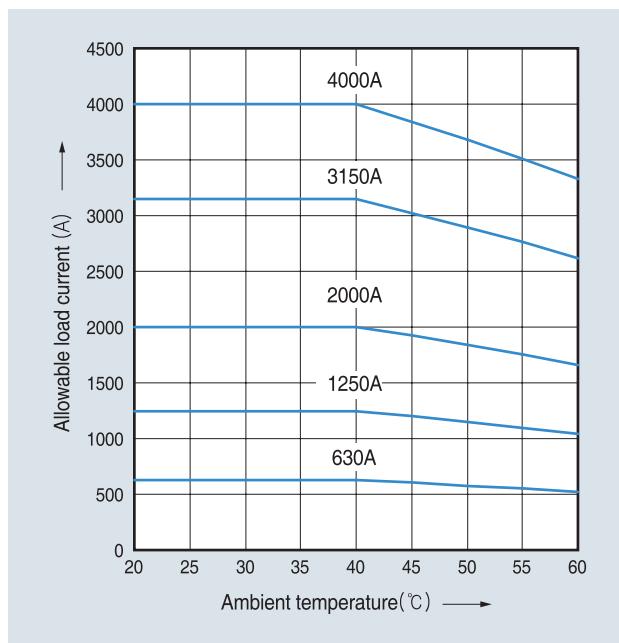

<Figure 3> Allowable load current by ambient temperature

Comparison of GCB & VCB

In the system of medium voltage lines VCB uses a vacuum which is an eco friendly medium for arc extinguishing. It also offers excellent interrupting properties and ease of maintenance and has expanded the area to the scope of the GCB as the overlap increases.

Items	GCB	VCB	Comparison results	Remarks
Images				
Arc extinguish medium and characteristics	SF ₆ gas <ul style="list-style-type: none">- Greenhouse gas that causes global warming.- The toxic gas generated by chemical reactions due to arc energy.- 5kgf/mm² high pressure required.	Vacuum <ul style="list-style-type: none">- Green clean medium.- 5 × 10⁻⁵ Torr vacuum rate to maintain.	VCB is better than GCB	
Maintenance of the arc media	<ul style="list-style-type: none">- Periodic check and supplement the gas pressure required.- Automatic locking if gas pressure falls below the certain value. <p>In the event of an accident while the gas valve is locked trip is disable and the load equipment can not be protected.</p>	<ul style="list-style-type: none">- Available until the product life.- Always keep trip-first feature. <p>When an accident occurs the trip-first feature functions to protect the equipment.</p>	VCB is better than GCB	
Rated voltage range (kV)	3.6~550	3.6~36	GCB is better than VCB	VCB has been increasing rapidly in the medium voltage systems.
Applicable rate of transient recovery voltage (RRRV)	Low	High	VCB is better than GCB	IEC62271-100 Annex M applied/ Interrupting performance verified.
Development and trends	Decline <ul style="list-style-type: none">- Company M discontinued producing GCB.- Company A manufactures VCB in medium voltage GCB production factory.- GCB Maker S started the production of VCB.	Increasing <ul style="list-style-type: none">- Companies A and S have developed new VCBs.- Development trend that the voltage coverage of VCB expands.- VI increased coverage. (GIS, DAIS, SIS, etc.)	VCB is better than GCB	

We open up a brighter future through
efficient and convenient energy solutions.



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.
Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



- According to The WEEE Directive, please do not discard the device with your household waste.



www.lselectric.co.kr

■ Headquarter

127 LS-ro (Hogye-dong) Dongan-gu, Anyang-si, Gyeonggi-Do, 14119, Korea

■ Seoul Office

LS Yongsan Tower, 92, Hangang-daero, Yongsan-gu, Seoul, 04386, Korea
Tel. 82-2-2034-4916, 4684, 4429

■ Overseas Subsidiaries

- LS ELECTRIC Japan Co., Ltd. (Tokyo, Japan)
Tel: 81-3-6268-8241 E-Mail: jschuna@lselectric.biz
- LS ELECTRIC (Dalian) Co., Ltd. (Dalian, China)
Tel: 86-411-8730-5872 E-Mail: jihao@lselectric.com.cn
- LS ELECTRIC (Wuxi) Co., Ltd. (Wuxi, China)
Tel: 86-510-6851-6666 E-Mail: jdyim@lselectric.com.cn
- LS ELECTRIC Vietnam Co., Ltd.
Tel: 84-93-631-4099 E-Mail: jhchoi4@lselectric.biz (Hanoi)
Tel: 84-24-3823-7890 E-Mail: sjbaik@lselectric.biz (Hochiminh)
- LS ELECTRIC Middle East FZE (Dubai, U.A.E.)
Tel: 971-4-886-5360 E-Mail: hschoib@lselectric.biz
- LS ELECTRIC Europe B.V. (Hoofddorf, Netherlands)
Tel: 31-20-654-1424 E-Mail: europartner@lselectric.biz
- LS ELECTRIC America Inc. (Chicago, USA)
Tel: 1-800-891-2941 E-Mail: sales.us@lselectricamerica.com



Technical Question or After-sales Service

Customer Center-Quick Responsive
Service, Excellent technical support

82-1644-5481

■ Overseas Branches

- LS ELECTRIC Tokyo Office (Japan)
Tel: 81-3-6268-8241 E-Mail: jschuna@lselectric.biz
- LS ELECTRIC Beijing Office (China)
Tel: 86-10-5095-1631 E-Mail: chendm@lselectric.com.cn
- LS ELECTRIC Shanghai Office (China)
Tel: 86-21-5237-9977 E-Mail: khpaek@lselectric.com.cn
- LS ELECTRIC Guangzhou Office (China)
Tel: 86-20-3818-2883 E-Mail: chenxs@lselectric.com.cn
- LS ELECTRIC Chengdu Office (China)
Tel: 86-28-8670-3201 E-Mail: yangcf@lselectric.com.cn
- LS ELECTRIC Qingdao Office (China)
Tel: 86-532-8501-2065 E-Mail: wangzy@lselectric.com.cn
- LS ELECTRIC Nanjing Office (China)
Tel: 86-25-8467-0005 E-Mail: ylong@lselectric.com.cn
- LS ELECTRIC Bangkok Office (Thailand)
Tel: 66-90-950-9683 E-Mail: sjleet@lselectric.biz
- LS ELECTRIC Jakarta Office (Indonesia)
Tel: 62-21-2933-7614 E-Mail: dioh@lselectric.biz
- LS ELECTRIC Moscow Office (Russia)
Tel: 7-499-682-6130 E-Mail: jdpark1@lselectric.biz
- LS ELECTRIC America Western Office (Irvine, USA)
Tel: 1-949-333-3140 E-Mail: ywyun@lselectricamerica.com